


Series		Description	Direct operated					Pilot operated				Page	
Parker	Denison		DIN / ISO	06	10	16	25	32	10	16	25		32
		Seat valves, electrically operated											
D1SE	–		•										2-3
		Spool valves, electrically operated											
D1VW	4D01	Standard, soft shift	•										2-7
D1VW	–	8 Watt solenoid	•										2-15
D1VW	–	Inductive position control	•										2-21
D1VW	–	Explosion proof (conform to ATEX)	•										2-27
D1MW	–	For wash down applications	•										2-31
D3W	4D02	Standard		•									2-37
D3W	–	Inductive position control		•									2-47
D3MW	–	For wash down applications		•									2-53
D31DW	–	Standard and position control						•					2-59
–	4D02V	Highest flow						•					
D41VW	–	Standard and position control							•				
–	4D03	Standard							•				
D81/91VW	–	Standard and position control								•			
–	4D06	Standard								•			
D111VW	–	Standard and position control									•		
		Spool valves, hydraulically operated											
D1VP	–		•										2-75
D3DP	–			•									
D4P	–				•								
D9P	–					•							
D11P	–						•						
		Spool valves, mechanically operated											
D1DL	–		•										2-87
D3DL	–			•									
D4L	–				•								
D9L	–					•							
		Accessories											
		Plugs Actuator kits O-rings and seal kits Mounting patterns											2-97

Characteristics

The directional valve type D1SE is equipped with a wet pin armature solenoid, drain free tapered poppet valve and compatible with the standards DIN NG06, CETOP 03, and NFPA D03. Due to the 3/2 way design, port A is either connected with P or discharged in the tank. The neutral position (solenoid not activated) is taken automatically by a return spring. This position remains until the solenoid is energized.

The valve poppet including activation lever and armature of the solenoid are located in the pressurized oil chamber of connection T. The valve poppet is designed such that there can be no differential area in its axial operational direction (opening, closing). Thus it is statically pressure-balanced so that the valve can be switched in both flow directions even under pressure.

The unit has an all-steel design, the important functional inner parts are hardened, the poppet and seat are grinded.




2

Technical data

General					
Design		Directional poppet valve			
Actuation		Solenoid			
Size		DIN NG6 / CETOP 03 / NFPA D03			
Mounting interface		DIN 24340 A6 / ISO 4401 / CETOP RP 121-H / NFPA D03			
Mounting position		Unrestricted			
Ambient temperature	[°C]	-25...+50, observe permissible duty cycle			
Weight	[kg]	1.5			
Hydraulic					
Max. operating pressure P, A and T	[bar]	350			
Fluid		Hydraulic oil in accordance with DIN 51524 / 51525			
Fluid temperature	[°C]	-25 ... +70			
Viscosity permitted	[cSt] / [mm²/s]	10...500			
Viscosity recommended	[cSt] / [mm²/s]	30...80			
Filtration		ISO 4406 (1999); 18/16/13 (meet NAS 1638: 7)			
Flow max.	[l/min]	20			
Static / Dynamic					
Step response	[ms]	Energized: approx. 50			
	[ms]	De-energized: approx. 60			
Electrical characteristics					
Duty ratio		See diagram			
Max. switching frequency	[1/h]	2000			
Protection class		IP65 in accordance with EN 60529 (plugged and mounted)			
	Code	K	J	U	G
Supply voltage	[V]	12 V =	24 V =	98 V =	205 V =
Tolerance supply voltage	[%]	±10	±10	±10	±10
Current consumption	[A]	1.95	1.1	0.25	0.13
Power consumption	[W]	23.4	26.4	24.3	26.6
Solenoid connection		Connector as per EN 175301-803			
Wiring min.	[mm²]	3 x 1.5 recommended			
Wiring length max.	[m]	50 recommended			

With electrical connections the protective conductor (PE ⚡) must be connected according to the relevant regulations.

2

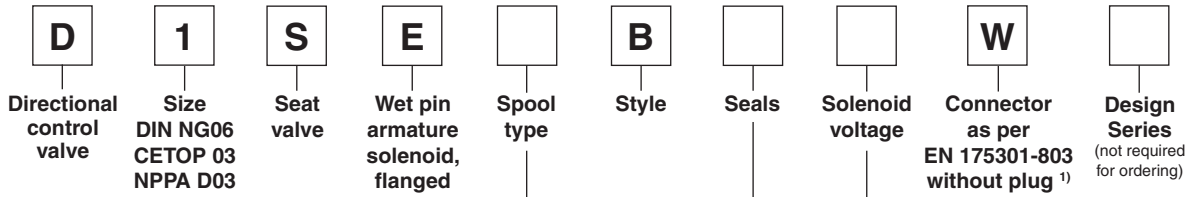

Code	Spool type
30	
83	

Code	Voltage
K	12V=
J	24V=
U ²⁾	98V=
G ²⁾	205V=

²⁾To be used with rectifier plug when DC solenoids are used with AC input.

Code	Seals
N	NBR
V	FPM


Bold letters =
Short-term availability

¹⁾ Please order plug separately.


Solenoids for repair

Voltage	Ordering code
12V=	7329700 - 12V
24V=	7329700 - 24V
98V=	7329700 - 98V
205V=	7329700 - 205V


Performance curve Δp -Q

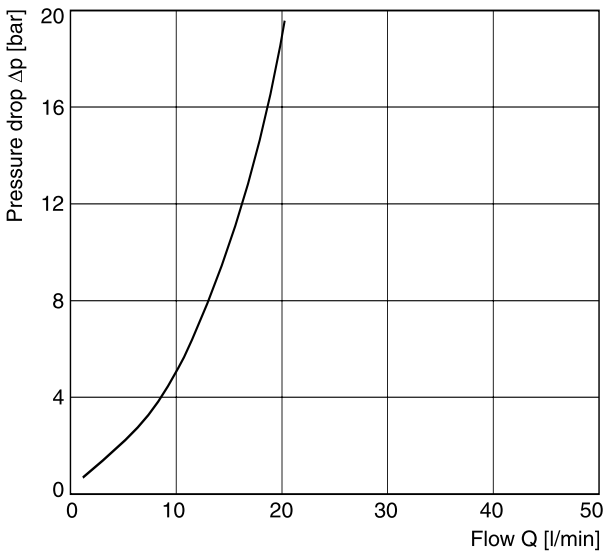

Duty cycle versus ambient temperature

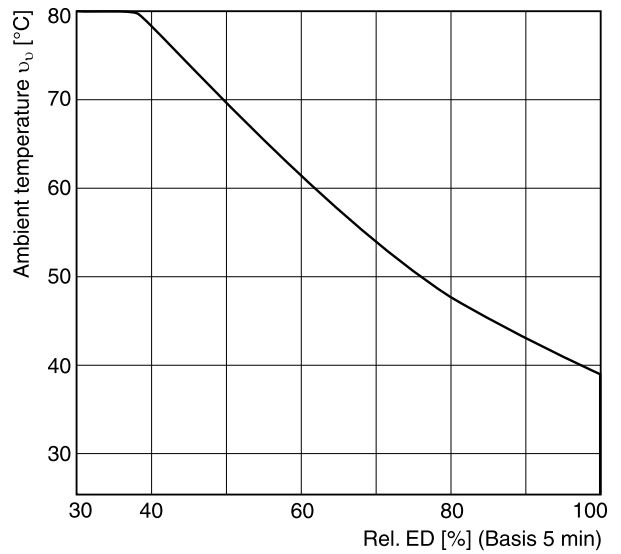

Dimensions

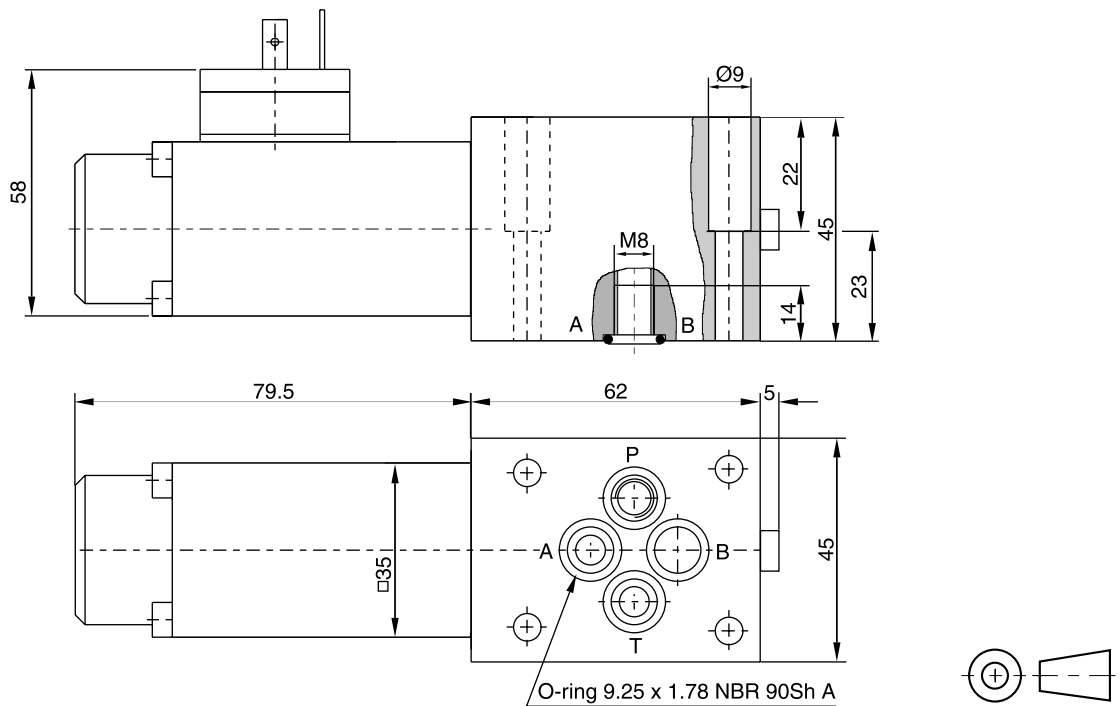

Surface finish	Kit	Kit	Kit	Kit
$\sqrt{R_{max} 6.3}$ $\square 0.01/100$	BK375	4x M5x30 DIN 912 12.9	7.6 Nm $\pm 15\%$	NBR: SK-D1SE-70 FPM: DK-D1SE-V70

Subplates and manifolds see chapter 12.

The space necessary to remove the plug per EN 175301-803, design type AF is at least 15 mm.
The torque for the screw M3 of the plug has to be 0.5 to 0.6 Nm.


Characteristics

The new NG06 directional control valve is available with both Parker (D1VW) and Denison (4D01) model codes.


The new design provides high functional limits up to 80 l/min in combination with a very low, energy-saving pressure drop.

A wide variety of spool options allows to design an unlimited number of hydraulic circuits.

Versions with 8 watt coils, position control, Atex approval, surface protection and connector variants are shown in the following chapters.



2

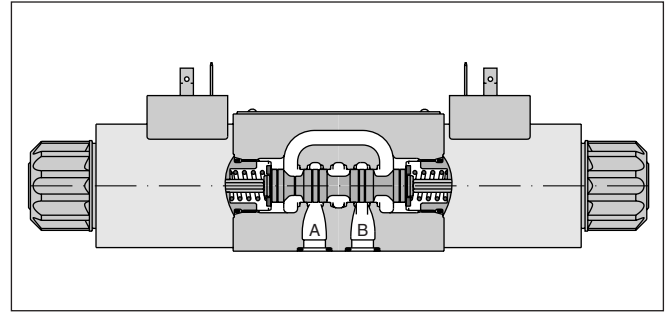

Technical data

General		Directional spool valve											
Design		Solenoid											
Actuation		DIN NG06 / CETOP 03 / NFPA D03											
Nominal size		DIN 24340 A6 / ISO 4401 / CETOP RP 121-H / NFPA D03											
Mounting interface		unrestricted, preferably horizontal											
Mounting position		unrestricted, preferably horizontal											
Ambient temperature		[°C]	-25...+50										
Weight		[kg]	1.5 (1 solenoid), 2.1 (2 solenoids)										
Hydraulic													
Max. operating pressure		[bar]	P, A B: 350; T: 210 (DC), T: 140 (AC)										
Fluid		Hydraulic oil in accordance with DIN 51524 / 51525											
Fluid temperature		[°C]	-25 ... +70										
Viscosity permitted		[cSt] / [mm²/s]	2.8...400										
Viscosity recommended		[cSt] / [mm²/s]	30...80										
Filtration		ISO 4406 (1999); 18/16/13 (meet NAS 1638: 7)											
Flow max.		[l/min]	80										
Leakage at 50 bar		[ml/min]	Up to 10 per flow path, depending on spool										
Static / Dynamic													
Step response		see table response time											
Electrical characteristics													
Duty ratio		100% ED; CAUTION: coil temperature up to 150 °C possible											
Max. switching frequency		[1/h]	15000										
Protection class		IP 65 in accordance with EN 60529 (plugged and mounted)											
Code		<table border="1"> <tr> <th>K</th> <th>J</th> <th>U</th> <th>G</th> <th>Y</th> <th>T</th> </tr> </table>						K	J	U	G	Y	T
K	J	U	G	Y	T								
Supply voltage		[V]	12 V =	24 V =	98 V =	205 V =	110V at 50Hz/ 120V at 60Hz	230V at 50Hz/ 240V at 60Hz					
Tolerance supply voltage		[%]	±10	±10	±10	±10	±5	±5					
Current consumption hold		[A]	2.58	1.29	0.32	0.15	0.6 / 0.55	0.3 / 0.27					
Current consumption in rush		[A]	2.58	1.29	0.32	0.15	2.5 / 2.4	1.25 / 1.2					
Power consumption hold			31 W	31 W	31 W	31 W	70 / 70 VA	70 / 70 VA					
Power consumption in rush			31 W	31 W	31 W	31 W	280 / 290 VA	280 / 290 VA					
Solenoid connection		Connector as per EN 175301-803, solenoid identification as per ISO 9461 (code W).											
Wiring min.		[mm²]	3 x 1.5 recommended										
Wiring length max.		[m]	50 recommended										

With electrical connections the protective conductor (PE ⚡) must be connected according to the relevant regulations.

Ordering Code

Directional Control Valve Series D1VW (PARKER)

D

Directional control valve

1

Size
DIN NG06
CETOP 03
NFPA D03

V

3-chamber valve

W

Wet pin armature solenoid, threaded in tube

□

Spool type

□

Spool position

□

Seals

2

3 position spools	
Code	Spool type
	a 0 b
001	
002	
003	
004	
005	
006	
007	
008 ¹⁾	
009 ¹⁾	
010	
011	
014	
015	
016	
021	
022	
031	
032	
034	
035	
061	
081	
082	
102	
204 ¹⁾	
205 ¹⁾	

2 position spools	
Code	Spool type
	a b
020	
026	
030	
083 ¹⁾	
101	
208	

¹⁾ Consider specific spool position.


Code	Seals
N	NBR
V	FPM

3 position spools			
Code	Spool position		
C			3 positions. Spring offset in position "0". Operated in position "a" or "b".
	Standard	Spool type 008,009, 204, 205	
E			2 positions. Spring offset in position "0".
	Operated in position "a".	Operated in position "b".	
F			2 positions. Operated in position "0".
	Spring offset in position "b".	Spring offset in position "a".	
K			2 positions. Spring offset in position "0".
	Operated in position "b".	Operated in position "a".	
M			2 positions. Operated in position "0".
	Spring offset in position "a".	Spring offset in position "b".	

2 position spools			
Code	Spool position		
	Standard	Spool type 083	
B			2 positions. Spring offset in position "b". Operated in position "a".
D			2 positions. Operated in position "a" or "b". No centre or offset position.
H			2 positions. Spring offset in position "a". Operated in position "b".

Bold letters =
Short-term availability

Ordering Code

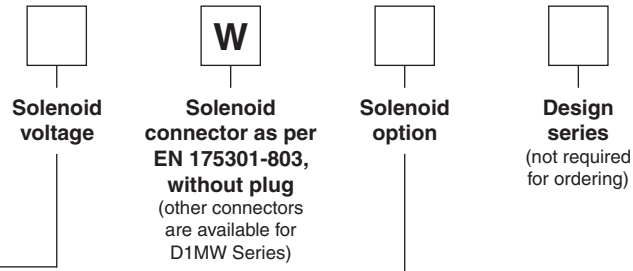


2

Code	Voltage
K	12V =
J	24V =
U ²⁾	98V =
G ²⁾	205V =
Y	110V 50Hz / 120V 60Hz
T	230V 50Hz / 240V 60Hz

²⁾ Rectifier needed for DC solenoid when used with AC input.

Code	Solenoid option
omit	Standard solenoid with manual override
T	without manual override
S2 ³⁾	Soft shift orifice size 0.5 mm.
S3 ³⁾	Soft shift orifice size 0.75 mm.

³⁾ with built-in orifice (DC only)



The Parker model code should be used for all new applications. Otherwise also refer to Denison model code.

Further spool types, solenoid voltages and connectors on request.

Directional Control Valve Series 4D01 (DENISON)

Ordering Code

2



Directional control valve size DIN NG06 CETOP 03

Body 3-chamber design

Control

Spool type

Spool position

End cap

Design series

Seals

Solenoid voltage

Options

Code	Control
1	1 solenoid
2	2 solenoids
7	2 solenoids and 2 pos. detents (only for spool types 11, 12, 51)

Code	Options
omit	Standard valve
G3 ³⁾	Soft shift with 0.75 mm orifice in anchor tube
32	Solenoid tube without manual override

³⁾ DC only

3 position spools	
Code	Spool type
	a 0 b
01	
02	
03	
07	
08	
09	
10	
13	
14	
46	
55	
56	
64	
65	
AR	
OT	
OX	

Code	Solenoid voltage
G0R	12V =
G0Q	24V =
GAR	98V =
GAG	205V =
W30	110V 50Hz/120V 60Hz
W31	230V 50Hz/240V 60Hz

Code	Seals
1	NBR
5	FPM

Code	End cap
01	for control 1
02	for controls 2 and 7

2 position spools	
Code	Spool type
	a b
11	
12	
51	
52	
71	
81 ¹⁾	
81 ²⁾	

¹⁾ Spool position code 01
²⁾ Spool position code 02

DENISON Hydraulics


The Denison model code is available for existing applications. For new applications we advise to refer to Parker model code.

3 position spools	
Code	Spool position
03	3 positions. Spring centered to "0".
05	2 positions. Spring centered to "0". Energized to "b".
06	2 positions. Spring centered to "0". Energized to "a".

2 position spools	
Code	Spool position
01	2 positions. Spring offset to "b". Energized to "a".
02	2 positions. Spring offset to "a". Energized to "b".
09	2 positions detent. Operated in "a" or "b". No centre or spring offset position.

Further spool types and voltages on request.

Flow curve

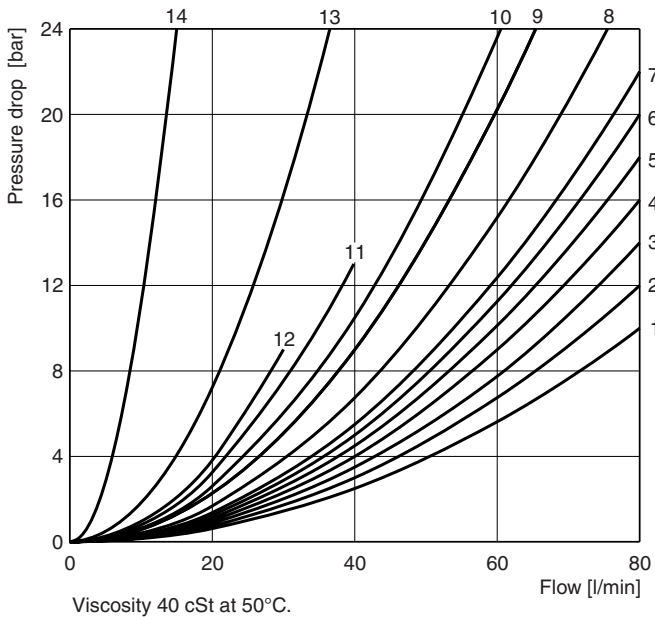

Spool		Position "b"			Position "a"			Position "0"				
		P-A	B-T	P-B	P-B	A-T	P-A	P-A	P-B	A-T	B-T	P-T
D1VW	4D01											
001	03	2	2		2	2						
002	01	1	4		1	4		1	1	5	5	2
003	10	3	4		3	6				7		
004	08	2	3		2	3				7	7	
005	13	2	2		2	2		12				
006	46	1	4		1	4		7	7			
007		3	2		2	2			3		2	7
010	BN	3			3							
011	02	2	2		2	2				14	14	
014		3	2		2	2		3		2		7
015	09	3	6		3	4					7	
016	14	2	2		2	2			12			
020B	51	4	4		2	3						
026B	12	4			4							
030B	11	2	3		1	2						
034	AR	4		8	3	3				5	7	
035	OT	3	3		4		8			7	5	
081		13	13		13	13						
082		13	13		13	13						
101B		11	10		10	9						
102	0X	1	4		1	4		5	5	8	8	6
61		1	3		1	3		3	2			
83H	71	5	2		5	2						
104		1			2	5		3		14		14
208	52	3			2							
		P-B	A-T		P-A	B-T		P-A	P-B	A-T	B-T	P-T
008		4	5		4	5						9
009	07	5	5		6	7						7
83B		5	2		5	2						
204	64	1	3		4	3		7		4		7
205	65	4	3		1	3			7		4	5

Spool		Position "b"			Position "a"		
		P-A	P-B	A-B	P-B	A-T	
021	55	2	4		4	2	
		P-A	B-T		P-A	P-B	A-B
022	56	6	2		5	2	
	81	2	2				
	81				2	2	

D1VW-4D01_UK.INDD CM_10.03.2008.1





Shift Limits

The diagram below specifies the shift limits for valves with DC solenoids. Valves with spool position “F” or “M” can only be operated up to 70% of the limits. The specifications apply to a viscosity of 40mm²/s and balanced flow



conditions. The shift limits can be considerably lower at unbalanced flow conditions. To avoid flow rates beyond the shift limits, a plug-in orifice can be inserted in the P-port.

2

Valve with standard DC solenoid

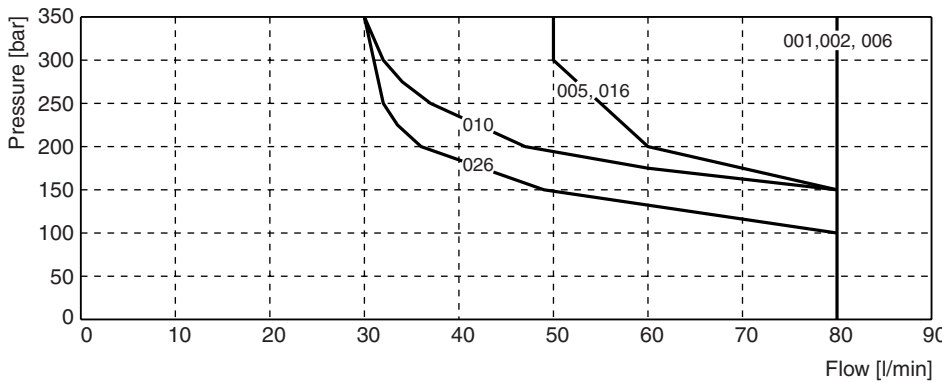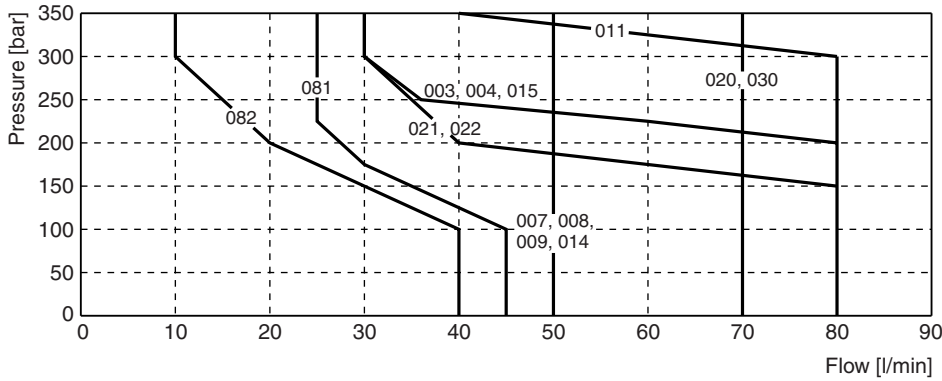

Valve with standard AC solenoid

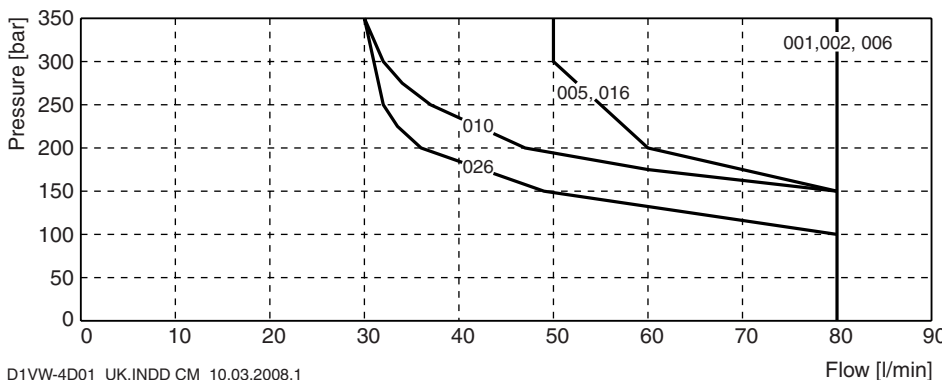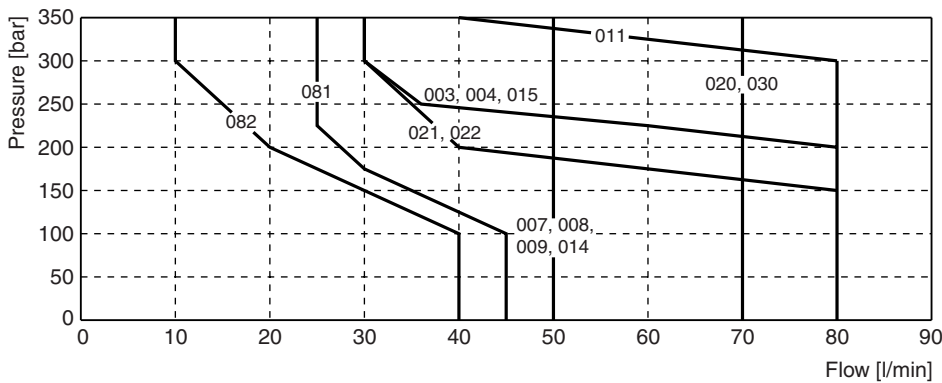


Parker	Denison
001	03
002	01
003	10
004	08
005	13
006	46
007	-
008	-
009	07
010	BN
011	02
014	-
015	09
016	14
020	51
021	55
022	56
026	12
030	11
081	-
082	-
001 F/M	81
204	64
205	65
208	52

D1VW-4D01_UK.INDD CM_10.03.2008.1



Response Times

Shift limit diagram - Soft shift

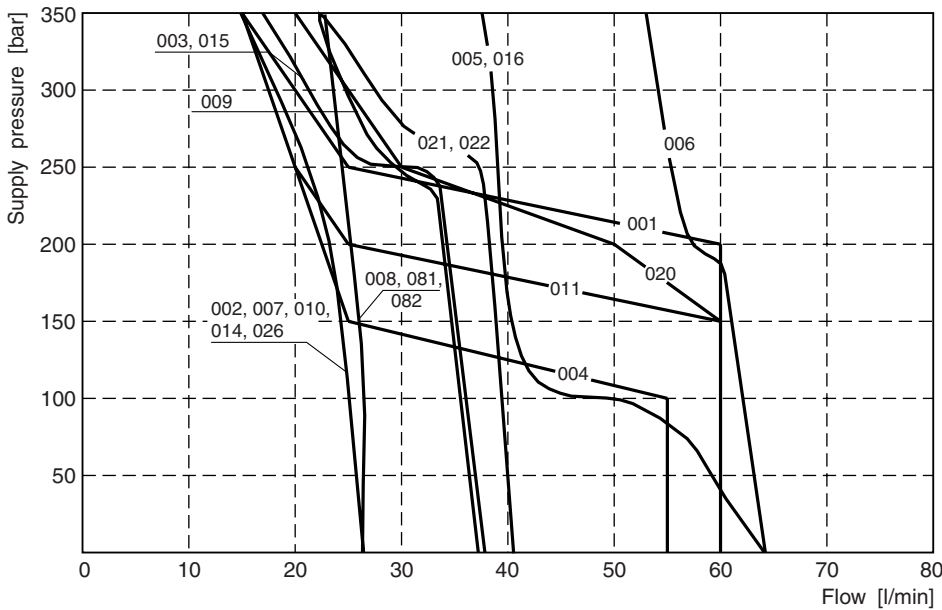

2



Response times D1VW Standard and Soft Shift

X-Number	Orifice size	3 positions: spool center condition				2 positions	
		Closed		Open		Energize	De-energize
		Energize	De-energize	Energize	De-energize		
(Standard)	-	32 ms (DC) 13 ms (AC)*	40 ms (DC) 20 ms (AC)*	32 ms (DC) 13 ms (AC)*	40 ms (DC) 20 ms (AC)*	32 ms (DC) 13 ms (AC)*	40 ms (DC) 20 ms (AC)*
S2	0.50	200 ms (DC)	650 ms (DC)	700 ms (DC)	650 ms (DC)	175 ms (DC)	225 ms (DC)
S3 (G3)	0.75	125 ms (DC)	325 ms (DC)	550 ms (DC)	550 ms (DC)	100 ms (DC)	100 ms (DC)

* For AC input and soft shift use rectifier plug.

Step response times were obtained under the following conditions: $v = 40 \text{ mm}^2/\text{s}$ at 50°C with the valve operating at nominal pressure and flow. Published response times are nominal and may vary with spool, flow, pressure and temperature.

Acceleration for orifice size 0.75, code "S3" (archived against a valve without soft shift)

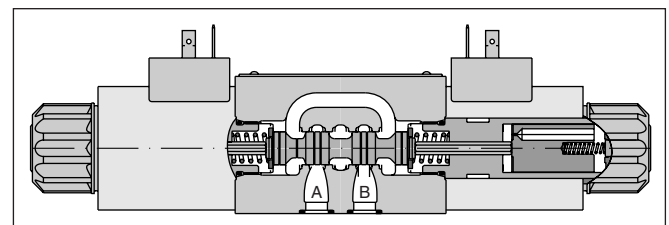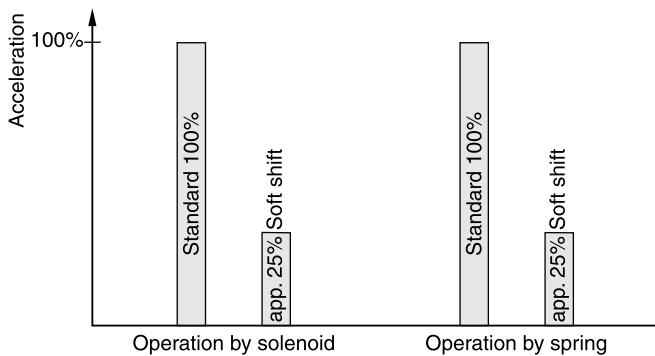


For even softer shifting, the proportional spools 081, 082, 101 and 102 can be used.


Dimensions

2


**Interface EN 175301-803, DC solenoid
B, E, F / 01, 06 -style**

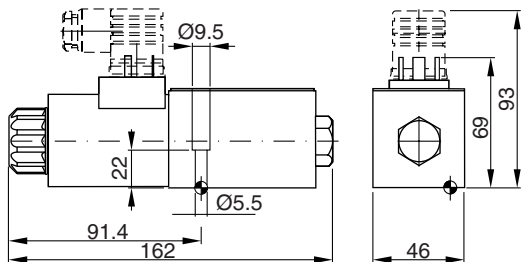


H, K, M / 02, 05 -style

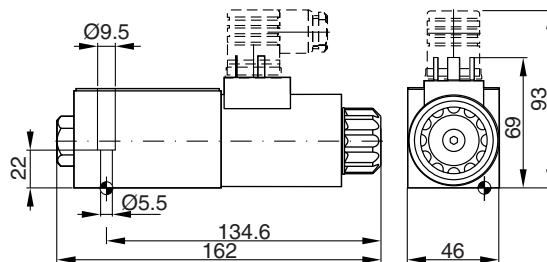


C, D / 03, 09 -style

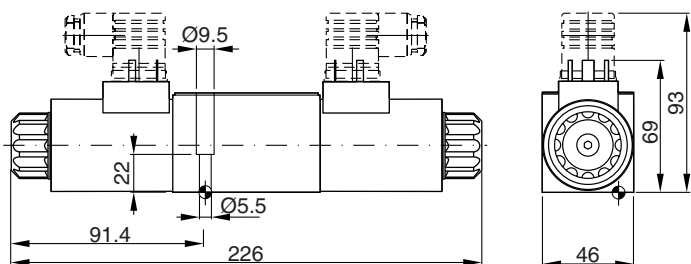



**Interface EN 175301-803, DC solenoid
B, E, F / 01, 06 -style**

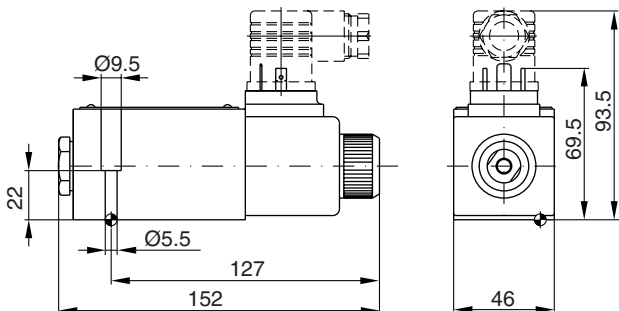



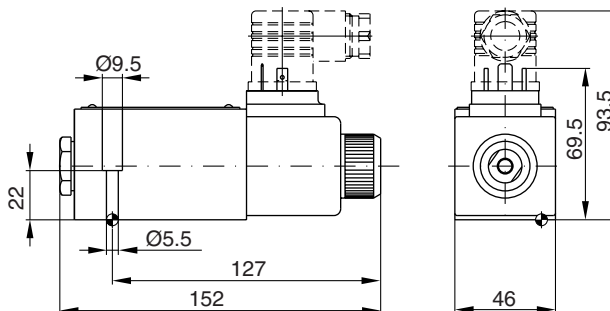


H, K, M / 02, 05 -style

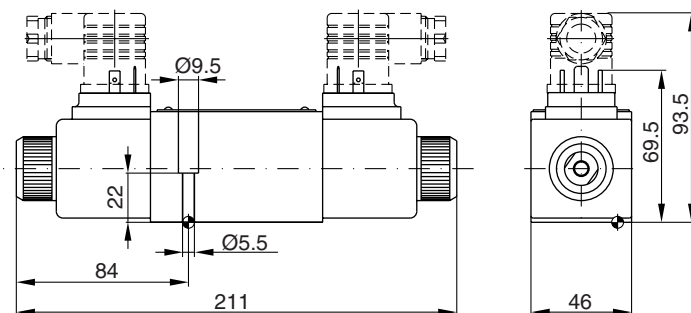

C, D / 03, 09 -style





Surface finish	 Kit	 Kit	 Kit	 Kit
	BK375	4x M5x30 DIN 912 12.9	7.6 Nm ±15%	NBR: SK-D1VW-N-91 FPM: SK-D1VW-V-91

The space necessary to remove the plug per EN 175301-803, design type AF is at least 15 mm.
The torque for the screw M3 of the plug has to be 0.5 to 0.6 Nm.

D1VW-4D01_UK.INDD CM_10.03.2008.1

The D1VW 8 Watt series is based on the standard D1VW design. The low watt, low current (<0.5 A) solenoid allows direct connection to a PLC or a bus knot. The valves are offered with standard solenoid connection (as per EN175301-803) and M12 x 1 connection. The version with M12 x 1 connection and LEDs are conform to the DESINA standard (**D**istribut**E**d and **S**tandardised **I**Nst**A**llation technology) for machine tools and manufacturing systems.

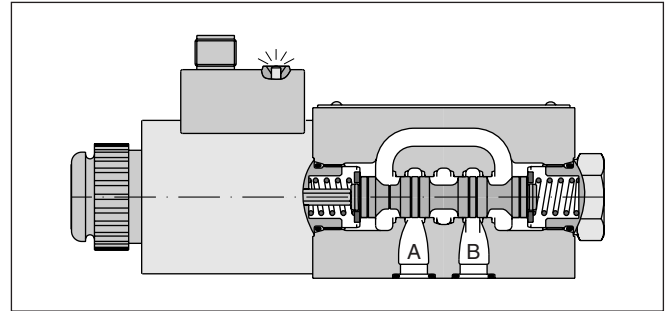

2

Technical data

General		
Design		Directional spool valve
Actuation		Solenoid
Size		DIN NG06 / CETOP 03 / NFPA D03
Mounting interface		DIN 24340 A6 / ISO 4401 / CETOP RP 121-H / NFPA D03
Mounting position		unrestricted, preferably horizontal
Ambient temperature	[°C]	-25...+50
Weight	[kg]	1.5 (1 solenoid), 2.1 (2 solenoids)
Hydraulic		
Max. operating pressure	[bar]	P, A B: 350, T: 210
Fluid		Hydraulic oil in accordance with DIN 51524 / 51525
Fluid temperature	[°C]	-25 ... +70
Viscosity permitted	[cSt] / [mm ² /s]	2.8...400
Viscosity recommended	[cSt] / [mm ² /s]	30...80
Filtration		ISO 4406 (1999); 18/16/13 (meet NAS 1638: 7)
Flow max.	[l/min]	45
Leakage at 50 bar	[ml/min]	Up to 10 per flow path, depending on spool
Static / Dynamic		
Step response at 95%	[ms]	Energized: 80...120; De-energized: 35...55
Electrical characteristics		
Duty ratio		100% ED; CAUTION: coil temperature up to 70 °C possible
Max. switching frequency	[1/h]	10000
Protection class		IP 65 in accordance with EN 60529 (plugged and mounted)
	Code	J
Supply voltage	[V]	24 V =
Tolerance supply voltage	[%]	±10
Current consumption	[A]	0.33
Power consumption	[W]	8
Solenoid connection		Connector as per EN 175301-803, solenoid identification as per ISO 9461 (code W). Plug M12x1 on coil as per IEC 61076-2-101 (code D).
Wiring min.	[mm ²]	3 x 1.5 recommended
Wiring length max.	[m]	50 recommended

With electrical connections the protective conductor (PE \perp) must be connected according to the relevant regulations.

D1VW 8W_UK.INDD CM_21.01.2008.1

Ordering Code

**Directional Control Valve
Series D1VW 8 Watt**

D

Directional control valve

1

**Size
DIN NG06
CETOP 03
NFPA D03**

V

3-chamber valve

W

Wet pin solenoid

Spool type

Spool position

Seals

2

3 position spools	
Code	Spool type
	a 0 b
001	
002	
003	
004	
005	
006	
007	
008 ¹⁾	
009 ¹⁾	
010	
011	
014	
015	
016	
076	
078	
081	
082	
102	

2 position spools	
Code	Spool type
	a b
020	
026	
030	
101	

¹⁾ Consider specific spool position.


Code	Seals
N	NBR
V	FPM

3 position spools		
Code	all 3 position spools	
C		3 positions. Spring offset in position "0". Operated in position "a" or "b".
	Standard	Spool type 008, 009
E	 Operated in position "a".	 Operated in position "b". 2 positions. Spring offset in position "0".
K	 Operated in position "b".	 Operated in position "a". 2 positions. Spring offset in position "0".

2 position spools		
Code	Spool position	
B		2 positions. Spring offset in position "b". Operated in position "a".
D ²⁾		2 positions. Operated in position "a" or "b". No centre or offset position.
H		2 positions. Spring offset in position "a". Operated in position "b".

²⁾ Only for spool 020 available.

**Bold letters =
Short-term availability**

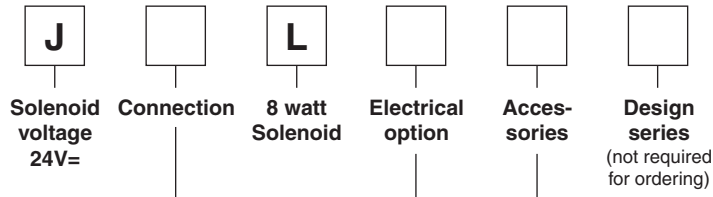

Code	Connection
D ³⁾	M12x1 on coil as per IEC 61076-2-101
W ³⁾	Connector as per EN 175301-803, without plug

³⁾ Please order plug separately.

Code	Accessories
omit	Standard valve (in combination with solenoid connection "W")
5	In combination with solenoid connection "D"

Solenoid identification acc. to ISO 9461

Code	Electrical option
omit	Standard valve (in combination with solenoid connection "W")
J	Surge diode with LED, max. voltage peak 50V (only available in combination with solenoid conn. "D")


Further spool types on request.
 To get a DESINA valve, order the combination: JDLJ5

The flow curve diagram shows the flow versus pressure drop curves for all spool types. The relevant curve number for each spool type, operating position and flow direction is given in the table below.

2

Spool	Position „b“		Position „a“		Position „0“					
	P->A	B->T	P->B	A->T	P->A	P->B	A->T	B->T	P->T	A->B
001	3	1	3	1	-	-	-	-	-	-
002	2	1	2	1	2	2	1	1	2	1
003	5	1	5	1	-	-	1	-	-	-
004	4	1	4	1	-	-	1	1	-	8
005	4	2	5	2	7	-	-	-	-	-
006	2	4	2	4	7	7	-	-	-	7
007	6	1	4	2	-	2	-	1	4	-
010	6	-	5	-	-	-	-	-	-	-
011	6	2	6	2	-	-	8	8	-	-
014	4	2	6	1	2	-	1	-	4	-
015	5	1	5	1	-	-	-	1	-	-
016	5	2	4	2	-	7	-	-	-	-
020	5	3	5	3	-	-	-	-	-	-
026	6	-	6	-	-	-	-	-	-	-
030	3	1	3	1	-	-	-	-	-	-
	P->B	A->T	P->A	B->T	P->A	P->B	A->T	B->T	P->T	A->B
008	6	6	6	6	-	-	-	-	7	-
009	6	7	6	7	-	-	-	-	3	-


Flow curve diagram

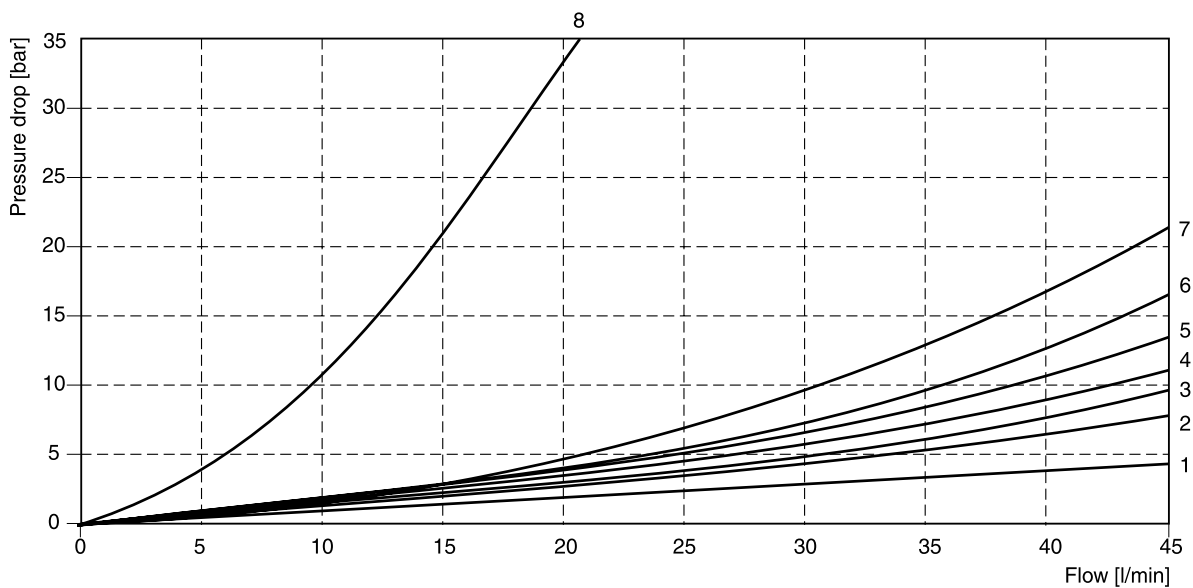


The diagram below specifies the shift limits. Valves with spool position "F" or "M" can only be operated up to 70% of the limits. The specifications apply to a viscosity 40mm²/s and balanced flow conditions. The shift limits can

be considerably lower at unbalanced flow conditions. To avoid flow rates beyond the shift limits, a plug-in orifice can be inserted in the P-port.


Shift limit

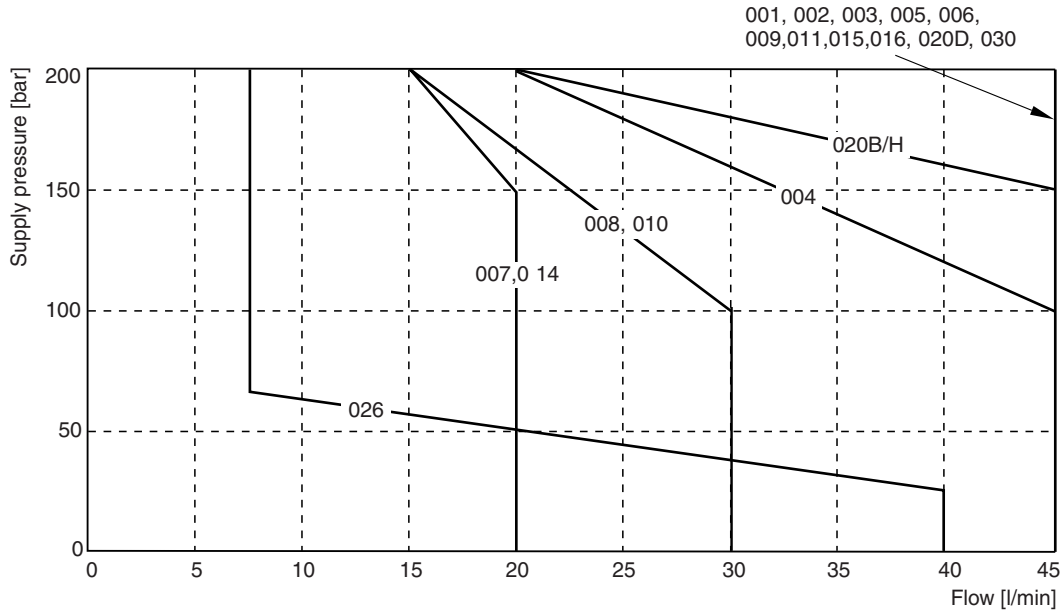

M12 pin assignment DESINA design (code „JDLJ5“), Pins 1 and 2 connected

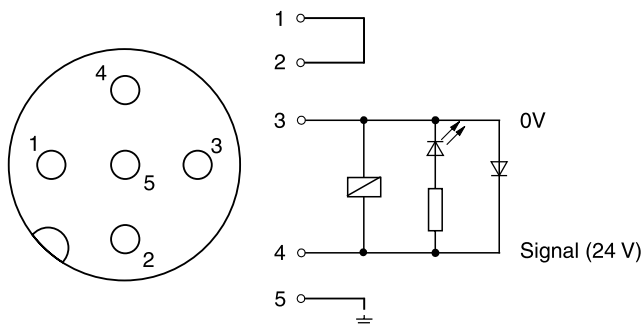



M12 pin assignment code “JDL“, Pins 1 and 2 not connected

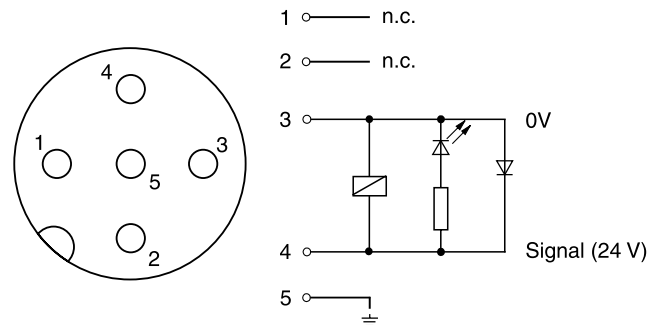


Dimensions

Interface EN 175301-803, DC solenoid
Style B, E

Style H, K

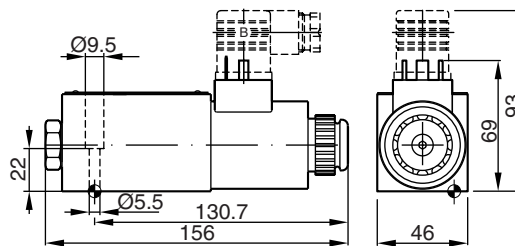
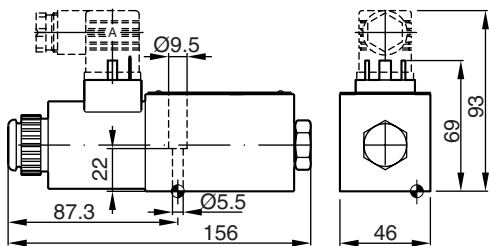


Style C, D


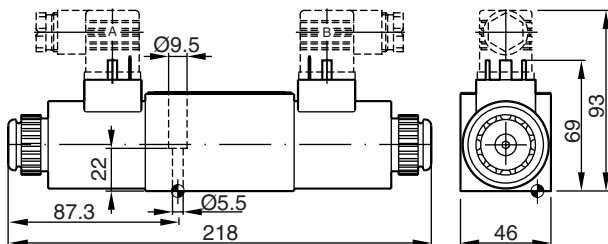




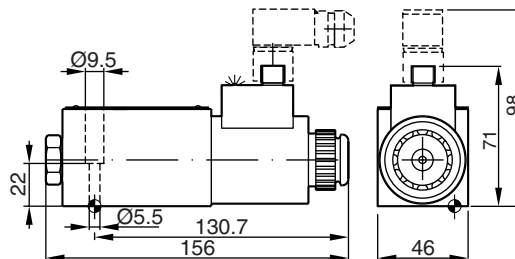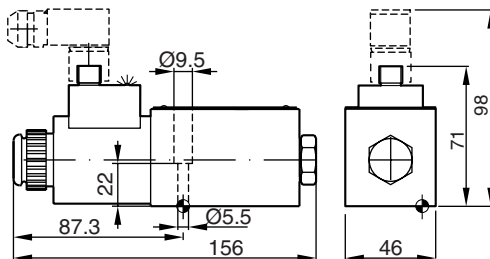


M12x1 connector, DC solenoid, JDLJ5 (DESINA) or JDL
Style B, E

Style H, K

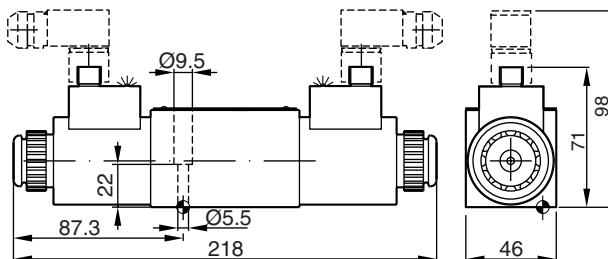

Style C, D




Surface finish	 Kit	 Kit	 Kit	 Kit
$\sqrt{R_{max}6.3}$ 	BK375	4x M5x30 DIN 912 12.9	7.6 Nm ±15%	NBR: SK-D1VW-N-91 FPM: SK-D1VW-V-91

The space necessary to remove the plug per EN 175301-803, design type AF is at least 15 mm.
The torque for the screw M3 of the plug has to be 0.5 to 0.6 Nm.

Characteristics

The direct operated 4/2 directional valves with inductive position control are typically used in safety relevant applications. The start or end position can be monitored. The position control is only available for single solenoid valves.


The fail-safe position of the directional valve during power failure is the spring offset position.



2

Attention

The adjustment of the position control is factory set and sealed. Replacement and repairs can only be undertaken by the manufacturer.

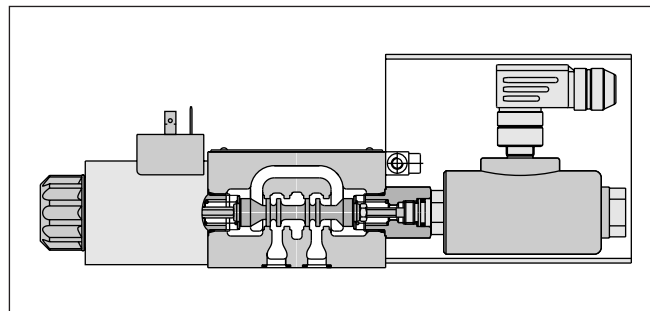

Technical data

General					
Design		Directional spool valve			
Actuation		Solenoid			
Size		DIN NG06 / CETOP 03 / NFPA D03			
Mounting interface		DIN 24340 A6 / ISO 4401 / CETOP RP 121-H / NFPA D03			
Mounting position		unrestricted, preferably horizontal			
Ambient temperature	[°C]	0...+50			
Weight	[kg]	1.8 (1 solenoid)			
Hydraulic					
Max. operating pressure	[bar]	P, A B: 350 ; T: 210			
Fluid		Hydraulic oil in accordance with DIN 51524 / 51525			
Fluid temperature	[°C]	-25 ... +70			
Viscosity permitted	[cSt] / [mm²/s]	2.8...400			
Viscosity recommended	[cSt] / [mm²/s]	30...80			
Filtration		ISO 4406 (1999); 18/16/13 (meet NAS 1638: 7)			
Flow max.	[l/min]	80			
Leakage at 50 bar	[ml/min]	Up to 10 per flow path, depending on spool			
Static / Dynamic					
Step response at 95%	[ms]	Energized: 32 ; De-energized: 40			
Electrical characteristics					
Duty ratio		100% ED; CAUTION: coil temperature up to 150 °C possible			
Max. switching frequency	[1/h]	15000			
Protection class		IP 65 in accordance with EN 60529 (plugged and mounted)			
	Code	K	J	U	G
Supply voltage	[V]	12 V =	24 V =	98 V =	205 V =
Tolerance supply voltage	[%]	±10	±10	±10	±10
Current consumption	[A]	2.5	1.25	0.31	0.15
Power consumption	[W]	30	30	30	30
Solenoid connection		Connector as per EN 175301-803, solenoid identification as per ISO 9461.			
Wiring min.	[mm²]	3 x 1.5 recommended			
Wiring length max.	[m]	50 recommended			

With electrical connections the protective conductor (PE ⚡) must be connected according to the relevant regulations.

D1VW poscontr_UK.INDD CM_21.01.2008.1

Ordering Code

D

Directional control valve

1

Size
DIN NG06
CETOP 03
NFPA D03

V

3-chamber valve

W

Wet pin solenoid

□

Spool type

□

Spool position

□

Seals

2

3 position spools	
Code	Spool type
	a 0 b
001	
002	
003 ¹⁾	
004	
005	
015 ²⁾	
016	
076	
078	

2 position spools	
Code	Spool type
	a b
020	
026	
030	

¹⁾ Only available for spool position "E" and "F".


²⁾ Only available for spool position "K" and "M".

Code	Seals
N	NBR
V	FPM

3 position spools		
Code	Standard	
E	 Operated in position "a".	2 positions. Spring offset in position "0".
F	 Spring offset in position "b".	2 positions. Operated in position "0".
K	 Operated in position "b".	2 positions. Spring offset in position "0".
M	 Spring offset in position "a".	2 positions. Operated in position "0".

2 position spools		
Code	Spool position	
B	 Operated in position "a".	2 positions. Spring offset in position "b".
H	 Operated in position "b".	2 positions. Spring offset in position "a".

Bold letters =
Short-term availability

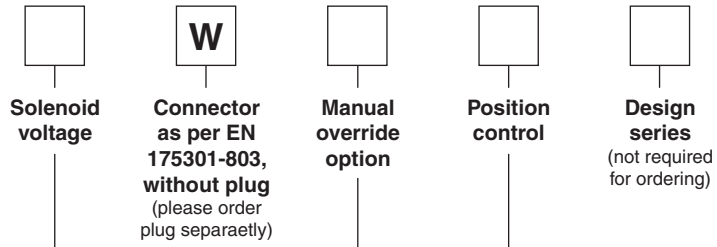

Code	Voltage
K	12V=
J	24V=
U ³⁾	98V=
G ³⁾	205V=

³⁾ To be used with rectifier plug when DC solenoids are used with AC input.

Code	Spool position	Position control
I2N	E, F, B (Solenoid on a-side)	End position monitored side B
I5N ⁴⁾		Start position monitored side B
I1N	K, M, H (Solenoid on b-side)	End position monitored side A
I4N ⁴⁾		Start position monitored side A

Code	Manual override
omit	Standard valve with manual override
T ⁴⁾	without manual override

⁴⁾ For hydraulic presses according to the safety regulations EN 693, solenoid option "T" (without manual override) and accessories "I4N" or "I5N" (start position monitored) are required.

Further spool types and voltages on request.


Position Control

Electrical characteristics of position control as per IEC 61076-2-101 (M12x1)

Protection class		IP 65 in accordance with EN 60529 (plugged and mounted)
Ambient temperature	[°C]	0...+50
Supply voltage / ripple	[V]	18...42 / 10%
Current consumption without load	[mA]	≤ 30
Max. output current per channel, ohmic	[mA]	400
Min. output load per channel, ohmic	[kOhm]	100
Max. output drop at 0.2A	[V]	≤ 1.1
Max. output drop at 0.4A	[V]	≤ 1.6
EMC		EN50081-1 / EN50082-2
Max. tolerance ambient field strength	[A/m]	<1200
Min. distance to next AC solenoid	[m]	>0.1
Interface		M12x1
Wiring min.	[mm ²]	5 x 0.25 brad shield recommended
Wiring length max.	[m]	50 recommended

2

M12 pin assignment




Start position monitored

- 1 + Supply 18...42V
- 2 Normally open B
- 3 0V
- 4 Normally open A
- 5 Earth ground

End position monitored

- 1 + Supply 18...42V
- 2 Normally closed B
- 3 0V
- 4 Normally open A
- 5 Earth ground

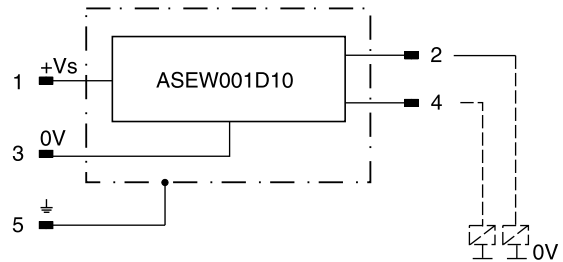

Definitions

Start position monitored:

The valve is de-energized. The inductive switch gives a signal at the moment when the spool leaves the spring offset position (below 15% spool stroke).

End position monitored:

The inductive switch gives a signal before the end position is reached (above 85% spool stroke).

The switch can only be located on the opposite side of the solenoid for direct operated valves.


The flow curve diagram shows the flow versus pressure drop curves for all spool types. The relevant curve number

for each spool type, operating position and flow direction is given in the table below.

Spool	Position „b“		Position „a“		Position „0“				
	P->A	B->T	P->B	A->T	P->A	P->B	A->T	B->T	P->T
001	2	2	2	2	–	–	–	–	–
002	1	4	1	4	1	1	5	5	2
003	3	4	3	6	–	–	7	–	–
004	2	3	2	3	–	–	7	7	–
005	2	2	2	2	12	–	–	–	–
015	3	6	3	4	–	–	–	7	–
016	2	2	2	2	–	12	–	–	–
020 B	4	4	2	3	–	–	–	–	–
026 B	4	–	4	–	–	–	–	–	–
030 B	2	3	1	2	–	–	–	–	–

2


Flow curve diagram

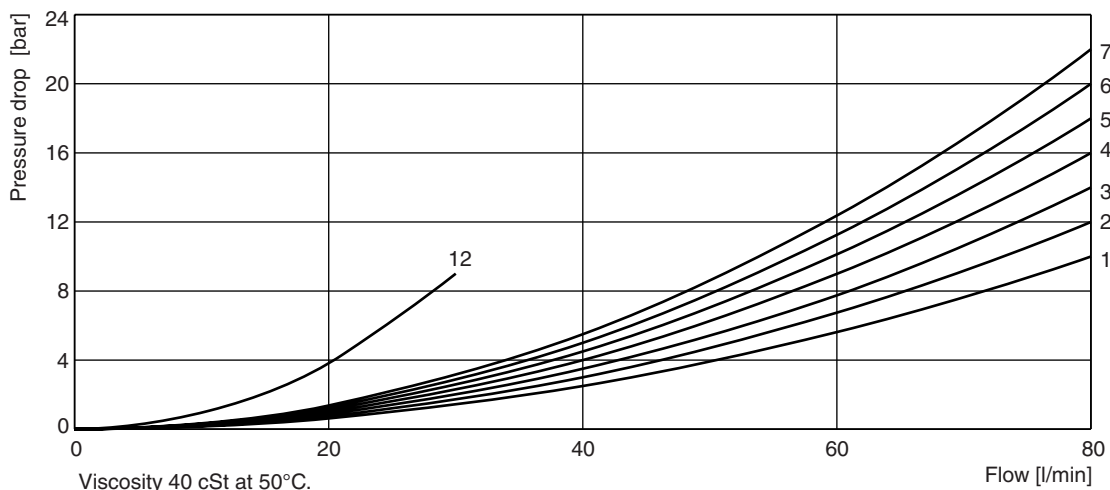

Shift limit diagram

The diagram below specifies the shift limits. Valves with spool position “F” or “M” can only be operated up to 70% of the limits. The specifications apply to a viscosity 40mm²/s and balanced flow conditions. The shift limits can

be considerably lower at unbalanced flow conditions. To avoid flow rates beyond the shift limits, a plug-in orifice can be inserted in the P-port.

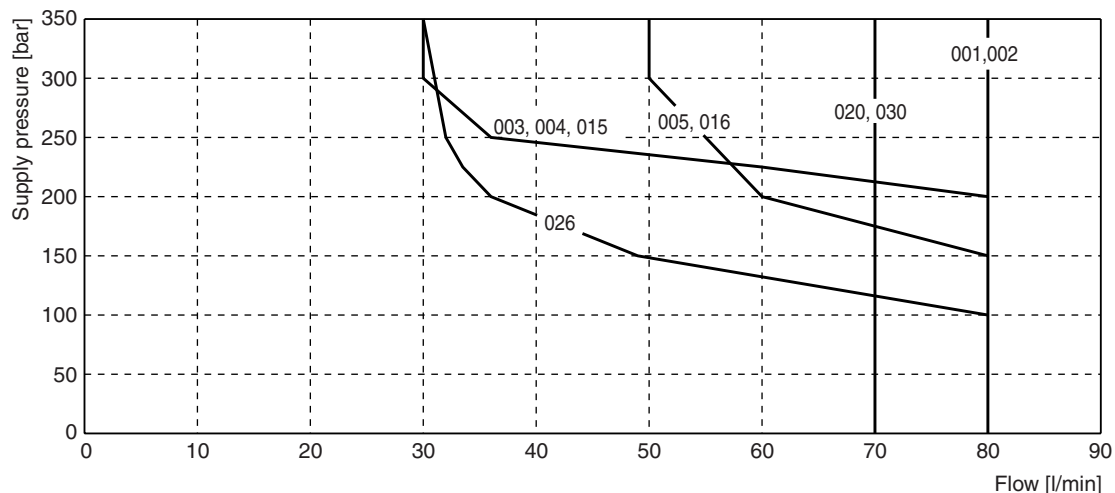


D1VW poscontr_UK.INDD CM_21.01.2008.1





Dimensions

Interface EN 175301-803, DC solenoid, with plug M12x1*
B, E, F -style



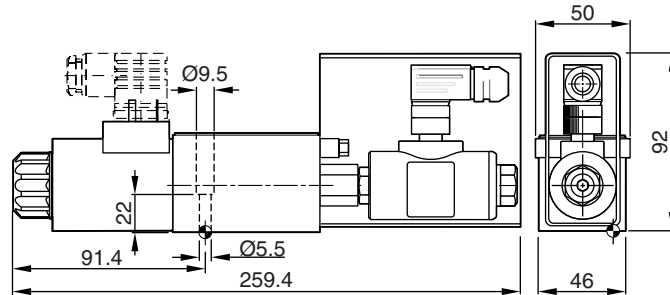


2

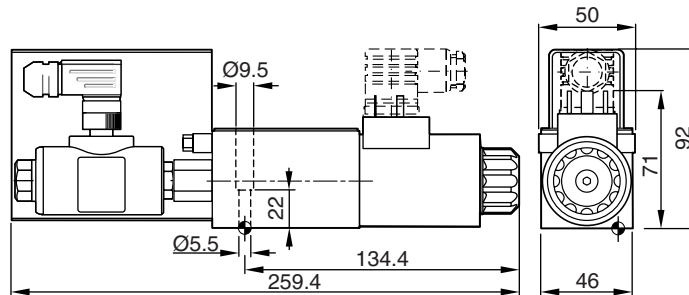

H, K, M -style



* Delivery includes plug M12 x 1 (see accessories, plug M12x1; order no.: 5004109).

Surface finish	 Kit	 Kit	 Kit	 Kit
	BK375	4x M5x30 DIN 912 12.9	7.6 Nm ±15%	NBR: SK-D1VW-N-91 FPM: SK-D1VW-V-91

The space necessary to remove the plug per EN 175301-803, design type AF is at least 15 mm.
The torque for the screw M3 of the plug has to be 0.5 to 0.6 Nm.

Attention


The adjustment of the position control is factory set and sealed. Replacement and repairs can only be undertaken by the manufacturer.

Characteristics

**Directional Control Valve
Series D1VW Explosion Proof**



The D1VW with explosion proof solenoids is based on the standard D1VW series. The specific solenoid design allows the use in hazardous environments.

The explosion proof class is

CE  II 2 G
EEx me II T4


for use in zone 1.

All explosion proof solenoids are DC design. For AC (code P and N) the input voltage is internally rectified.

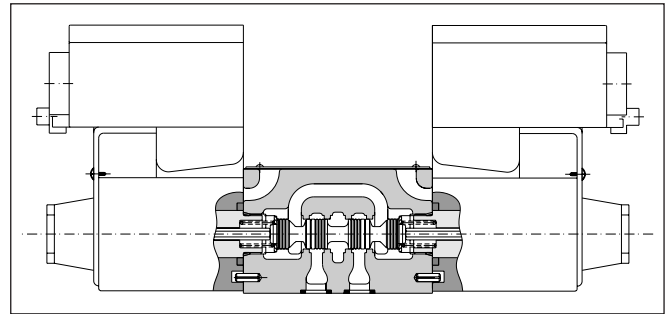

2


Technical data

General				
Design		Directional spool valve		
Actuation		Solenoid		
Size		DIN NG06 / CETOP 03 / NFPA D03		
Mounting interface		DIN 24340 A6 / ISO 4401 / CETOP RP 121-H / NFPA D03		
Mounting position		unrestricted, preferably horizontal		
Ambient temperature	[°C]	-25...+50		
Weight	[kg]	1.8 (1 solenoid), 2.7 (2 solenoids)		
Hydraulic				
Max. operating pressure	[bar]	P, A B: 350 T: 210		
Fluid		Hydraulic oil in accordance with DIN 51524 / 51525		
Fluid temperature	[°C]	-25 ... +60		
Viscosity permitted	[cSt] / [mm²/s]	2.8...400		
Viscosity recommended	[cSt] / [mm²/s]	30...80		
Filtration		ISO 4406 (1999); 18/16/13 (meet NAS 1638: 7)		
Flow max.	[l/min]	80		
Leakage at 50 bar	[ml/min]	Up to 10 per flow path, depending on spool		
Static / Dynamic				
Step response at 95%	[ms]	Energized: 32 (DC) De-energized: 40 (DC)		
Electrical characteristics				
Duty ratio		100% ED; CAUTION: coil temperature up to 130 °C possible		
Max. switching frequency	[1/h]	15000		
Protection class		CE  II 2 G , EEx me II T4, IP66		
	Code	J	Y	T
Supply voltage / ripple	[V]	24 V =	110/50Hz / 120/60Hz	230/50Hz / 240/60Hz
Tolerance supply voltage	[%]	±10	±5	±5
Current consumption	[A]	1.25	0.32	0.15
Power consumption	[W]	30	30	30
Solenoid connection		Box with M20x1.5 entry for cable glands. Solenoid identification as per ISO 9461.		
Wiring min.	[mm²]	3 x 1.5 recommended		
Wiring length max.	[m]	50 recommended		

With electrical connections the protective conductor (PE \downarrow) must be connected according to the relevant regulations.

Directional Control Valve Series D1VW Explosion Proof

Ordering Code



D
Directional control valve

1
Size
DIN NG06
CETOP 03
NFPA D03

V
3-chamber valve

W
Wet pin solenoid

Spool type

Spool position

Seals

Solenoid voltage

Connection:
Explosion proof with cable glands

Solenoid options:
Explosion proof EEx me II

Design series
(not required for ordering)

2

3 position spools	
Code	Spool type
001	
002	
003	
004	
005	
006	
007	
008 ¹⁾	
009 ¹⁾	
010	
011	
014	
015	
016	
021	
022	
031	
032	
076	
078	
081	
082	
102	

2 position spools	
Code	Spool type
020	
026	
030	
101	

¹⁾ Consider specific spool position.

Further spool types, styles, and combinations on request.

Code	Voltage
J	24V=
Y	110V 50Hz 120V 60Hz
T	230V 50Hz 240V 60Hz

Code	Seals
N	NBR
V	FPM

3 position spools			
Code	all 3 position spools		
C			3 positions. Spring offset in position "0". Operated in position "a" or "b".
	Standard	Spool type 008, 009	
E			2 positions. Spring offset in position "0".
F			2 positions. Operated in position "0".
K			2 positions. Spring offset in position "0".
M			2 positions. Operated in position "0".

2 position spools		
Code	Spool position	
B		2 positions. Spring offset in position "b". Operated in position "a".
D		2 positions. Operated in position "a" or "b". No centre or offset position.
H		2 positions. Spring offset in position "a". Operated in position "b".


The flow curve diagram shows the flow versus pressure drop curves for all spool types. The relevant curve number is given in the table below.

Spool	Position „b“		Position „a“		Position „0“					
	P->A	B->T	P->B	A->T	P->A	P->B	A->T	B->T	P->T	A->B
001	4	1	4	1	-	-	-	-	-	-
002	5	2	5	2	4	4	1	1	6	1
003	4	1	4	2	-	-	8	-	-	-
004	4	2	4	2	-	-	7	7	-	9
005	4	1	5	1	9	-	-	-	-	-
006	5	1	5	1	9	9	-	-	-	9
007	5	2	4	1	-	5	-	1	7	-
010	4	-	4	-	-	-	-	-	-	-
011	4	2	4	2	-	-	11	11	-	-
014	4	1	5	2	5	-	1	-	7	-
015	4	2	4	1	-	-	-	8	-	-
016	5	1	4	1	-	9	-	-	-	-
020	5	1	5	1	-	-	-	-	-	-
026	6	-	6	-	-	-	-	-	-	-
030	5	1	5	1	-	-	-	-	-	-
076	-	2	-	-	-	-	3	-	-	-
078	-	-	-	2	-	-	-	3	-	-
081	10	10	10	10	-	-	-	-	-	-
082	10	10	10	10	-	-	1)	1)	-	-
	P->B	A->T	P->A	B->T	P->A	P->B	A->T	B->T	P->T	A->B
008	2	2	2	2	-	-	-	-	8	-
009	3	3	3	3	-	-	-	-	9	-
	Position „b“		Position „a“							
	P->A	P->B	A->B	P->B	A->T					
021	3	3	3	6	1					
	P->A	B->T		P->A	P->B	A->B				
022	6	1		3	3	3				

1) Only for pressure compensation, no high flow possible.

2


Flow curve diagram

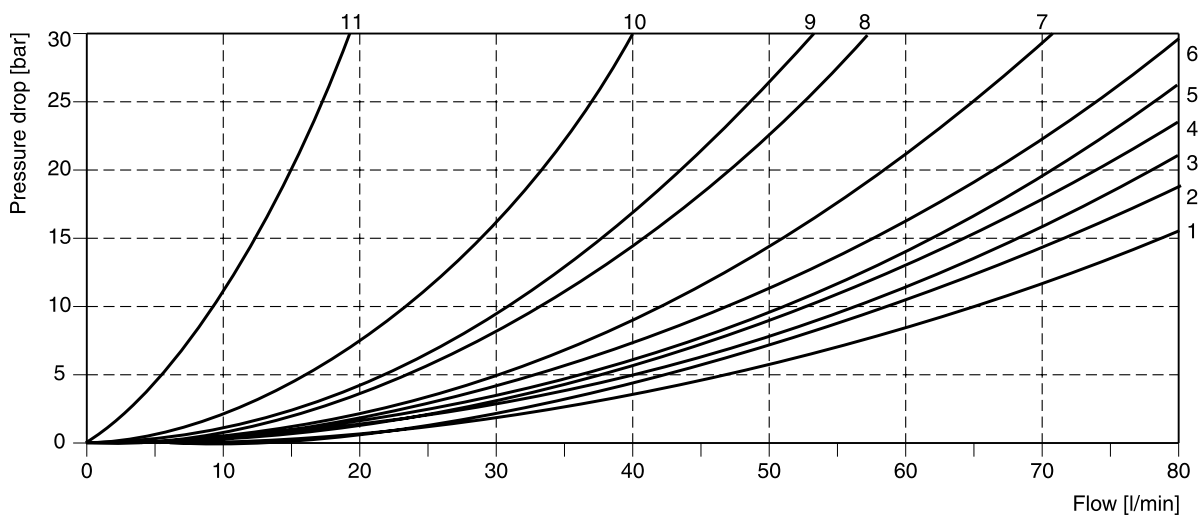


The diagram below specifies the shift limits for valves with DC solenoids. Valves with spool position “F” or “M” can only be operated up to 70% of the limits. The specifications apply to a viscosity 40mm²/s and balanced flow

conditions. The shift limits can be considerably lower at unbalanced flow conditions. To avoid flow rates beyond the shift limits, a plug-in orifice can be inserted in the P-port.


Shift limit diagram

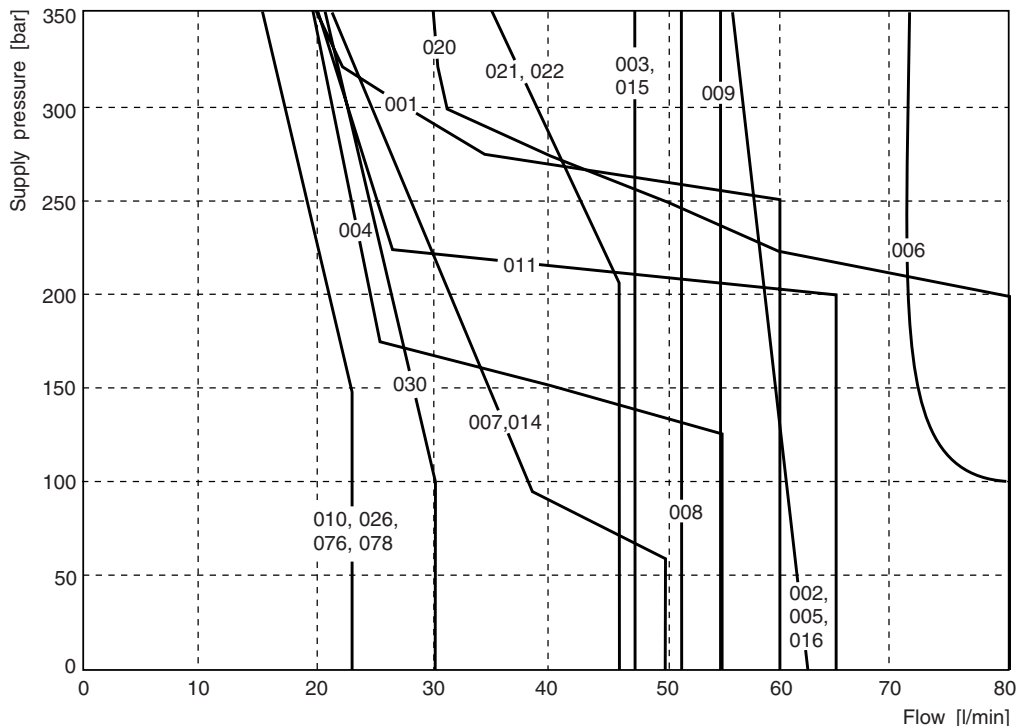



Dimensions
B, E, F -style

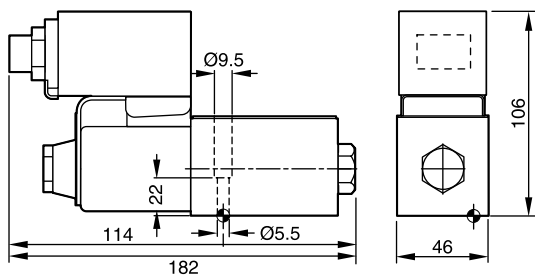

H, K, M -style

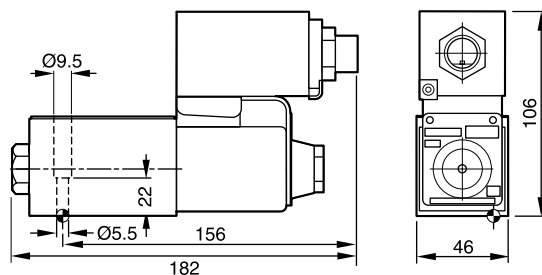

C, D -style

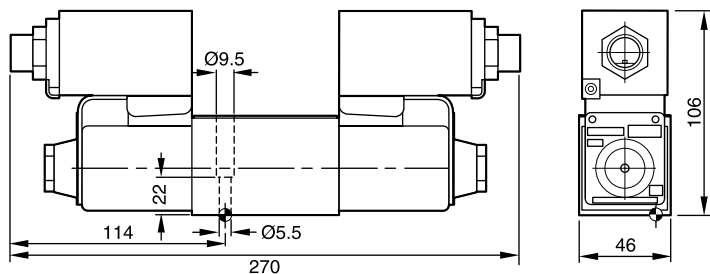

Surface finish	Kit			Kit
$\sqrt{R_{max} 6.3}$ $\square 0.01/100$	BK375	4x M5x30 DIN 912 12.9	7.6 Nm ±15%	NBR: SK-D1VW-N-91 FPM: SK-D1VW-V-91

D1VW expl_UK.INDD CM_21.01.2008.1



The new D1MW is based on the D1VW series of directional control valves size NG06, but offers additional corrosion protection of the valve body, the solenoid coil and the anchor tube as well as the typical solenoid connections for the mobile market such as AMP Junior Timer and DP4 "Deutsch".

Technical features

- High corrosion protection (optional)
- Solenoid connection:
 - Standard (as per EN175301-803)
 - AMP Junior Timer
 - DP4 2-pin "Deutsch"
- Robust design for rough applications
- Extended manual override with rubber cover (optional)



With AMP Junior Timer

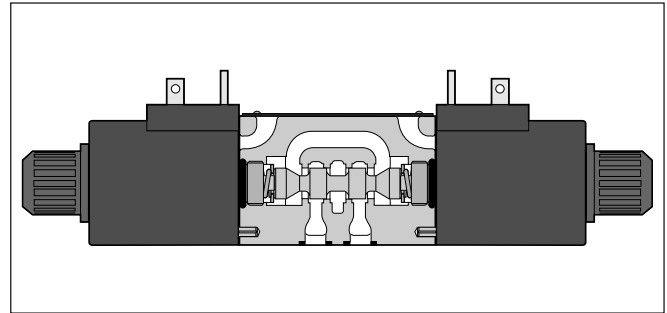

With connector as per EN 175301-803

Technical data

General			
Design		Directional spool valve	
Actuation		Solenoid	
Size		DIN NG06 / CETOP 03 / NFPA D03	
Mounting interface		DIN 24340 A6 / ISO 4401 / CETOP RP 121-H / NFPA D03	
Mounting position		Unrestricted, preferably horizontal	
Ambient temperature	[°C]	-25...+50	
Weight	[kg]	1.5 (1 solenoid), 2.1 (2 solenoids)	
Hydraulic			
Max. operating pressure	[bar]	P, A B: 350; T: 210	
Fluid		Hydraulic oil in accordance with DIN 51524 / 51525	
Fluid temperature	[°C]	-25 ... +70	
Viscosity permitted	[cSt] / [mm²/s]	2.8...400	
Viscosity recommended	[cSt] / [mm²/s]	30...80	
Filtration		ISO 4406 (1999); 18/16/13 (meet NAS 1638: 7)	
Flow max.	[l/min]	80	
Leakage at 50 bar	[ml/min]	Up to 10 per flow path, depending on spool	
Static / Dynamic			
Step response at 95%	[ms]	Energized: 32 De-energized: 40	
Electrical characteristics			
Duty ratio		100% ED; CAUTION: coil temperature up to 150 °C possible	
Max. switching frequency	[1/h]	15000	
Protection class		IP 65 in accordance with EN 60529 (plugged and mounted)	
	Code	K	J
Supply voltage	[V]	12 V =	24 V =
Tolerance supply voltage	[%]	±10	±10
Current consumption hold	[A]	2.5	1.25
Power consumption hold	[W]	30	30
Solenoid connection		Connector as per EN 175301-803 (code W), AMP Junior Timer (code A), DP4 2-pin "Deutsch" connector (code J). Solenoid identification as per ISO 9461.	
Wiring min.	[mm²]	3 x 1.5 recommended	
Wiring length max.	[m]	50 recommended	

With electrical connections the protective conductor (PE \perp) must be connected according to the relevant regulations.

D1MW_UK.INDD CM_21.01.2008.1

Ordering Code

**Directional Control Valve
Series D1MW**

D

Directional control valve

1

Size
DIN NG06
CETOP 03
NFPA D03

M

3-chamber valve for mobile and marine applications

W

Wet pin armature solenoid, threaded in tube

Spool type

Spool position

N

NBR Seal

2


3 position spools	
Code	Spool type
	a 0 b
001	
002	
004	
006	
008 ¹⁾	
011	
021	
022	
081	
082	

2 position spools	
Code	Spool type
	a b
020	
030	

¹⁾ Consider specific spool position.

3 position spools		
Code	all 3 position spools	
C		3 positions. Spring offset in position "0". Operated in position "a" or "b".
	Standard	Spool type 008
E	 Operated in position "a".	 Operated in position "b".
F	 Spring offset in position "b".	 Spring offset in position "a".
K	 Operated in position "b".	 Operated in position "a".
M	 Spring offset in position "a".	 Spring offset in position "b".

2 position spools		
Code	Spool position	
B		2 positions. Spring offset in position "b". Operated in position "a".
D		2 positions. Operated in position "a" or "b". No centre or offset position.
H		2 positions. Spring offset in position "a". Operated in position "b".

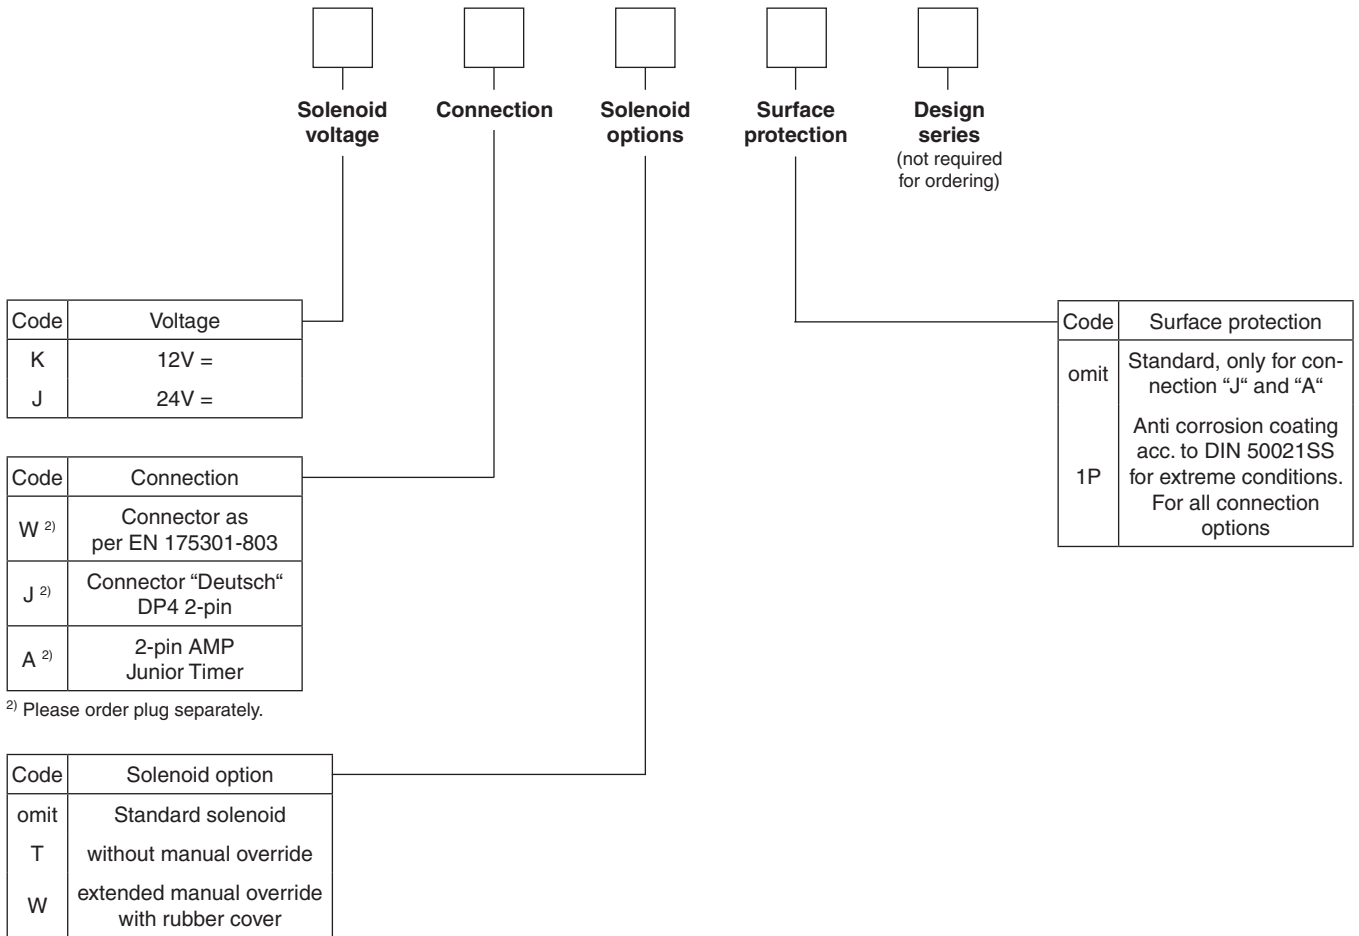

Other spool types on request.


The flow curve diagram shows the flow versus pressure drop curves for all spool types. The relevant curve number for each spool type, operating position and flow direction is given in the table below.

2

Spool	Position „b“		Position „a“		Position „0“					
	P->A	B->T	P->B	A->T	P->A	P->B	A->T	B->T	P->T	A->B
001	3	1	3	1	-	-	-	-	-	-
002	2	1	2	1	2	2	1	1	2	1
004	4	1	4	1	-	-	1	1	-	9
006	2	4	2	4	7	7	-	-	-	7
011	6	2	6	2	-	-	9	9	-	-
020	5	3	5	3	-	-	-	-	-	-
030	3	1	3	1	-	-	-	-	-	-
081	10	10	10	10	-	-	-	-	-	-
082	10	10	10	10	-	-	1)	1)	-	-
	P->B	A->T	P->A	B->T	P->A	P->B	A->T	B->T	P->T	A->B
008	2	2	2	2	-	-	-	-	8	-
	Position „b“		Position „a“							
	P->A	P->B	A->B	P->B	A->T					
021	3	3	3	6	1					
	P->A	B->T		P->A	P->B	A->B				
022	6	1		3	3	3				


1) Only for pressure compensation, no higher flow possible.

Flow curve diagram

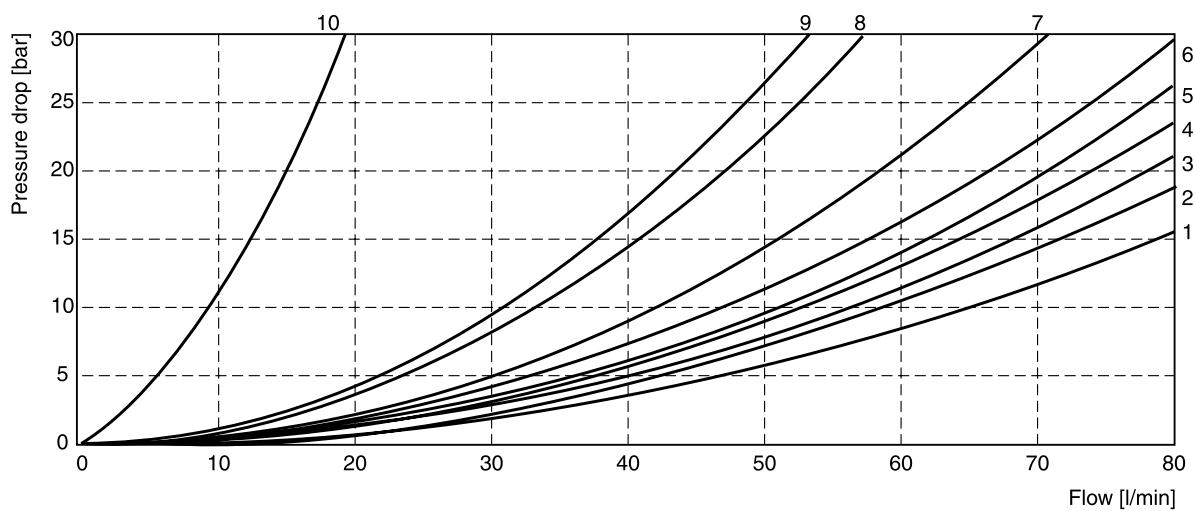

The diagram below specifies the shift limits. Valves with spool position “F” or “M” can only be operated up to 70% of the limits. The specifications apply to a viscosity 40mm²/s and balanced flow conditions. The shift limits can

be considerably lower at unbalanced flow conditions. To avoid flow rates beyond the shift limits, a plug-in orifice can be inserted in the P port.

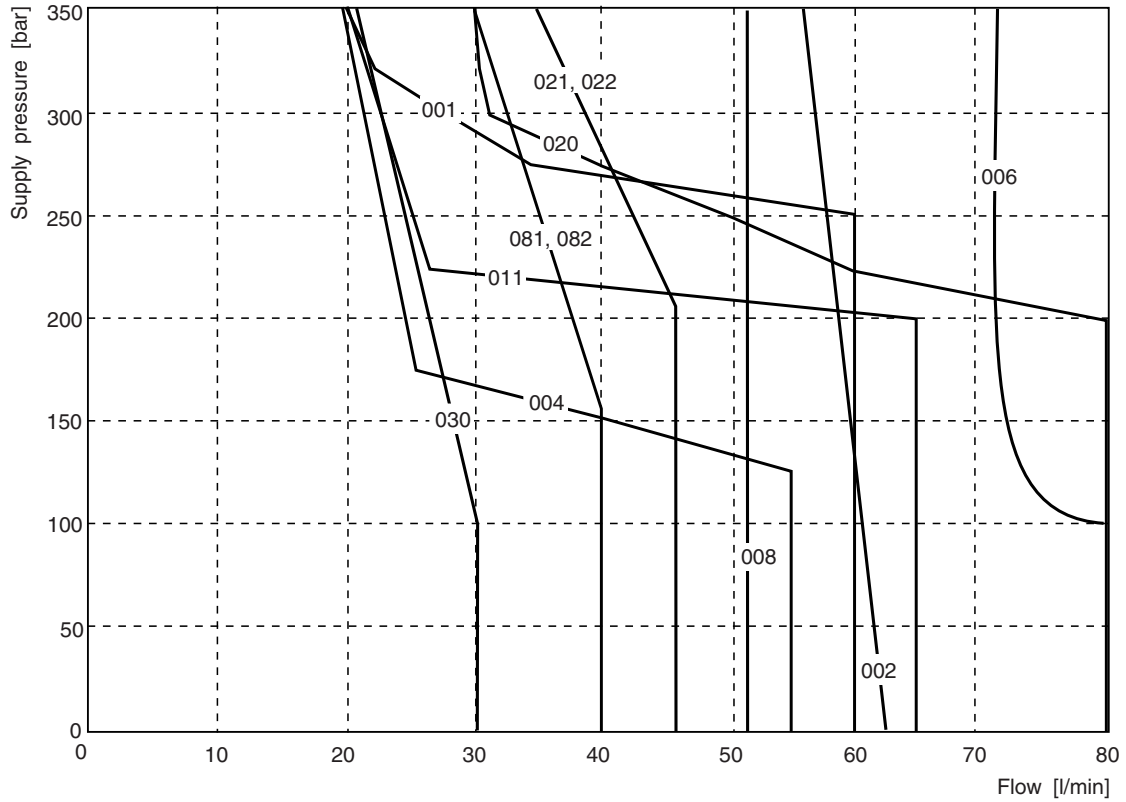


2

Dimensions


Dimensions with EN 175301-803 Connector

B, E, F-style


H, K, M-style

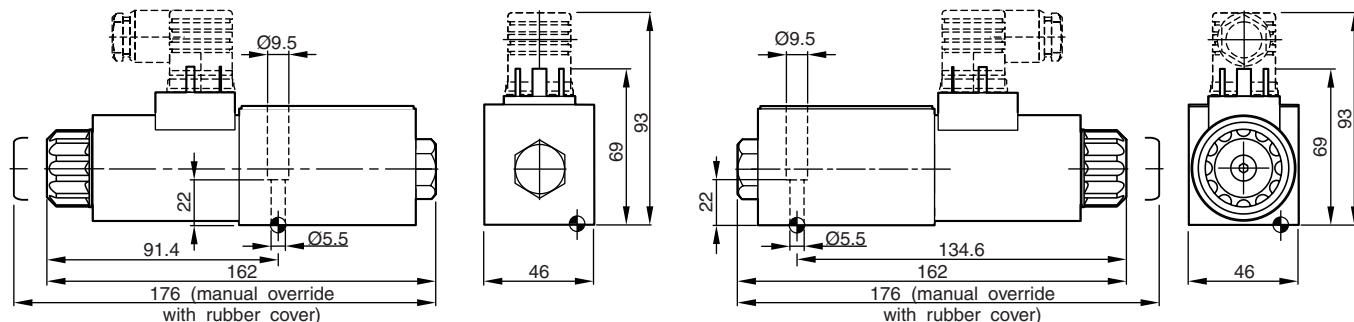


C and D-style

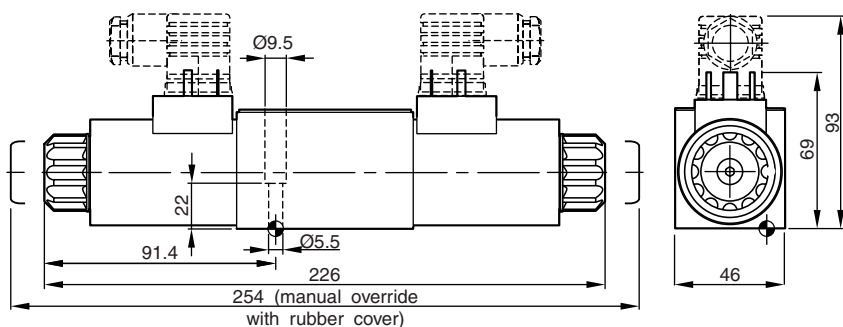

Dimensions with 2pin AMP Junior Timer Connector (only C and D-style shown)

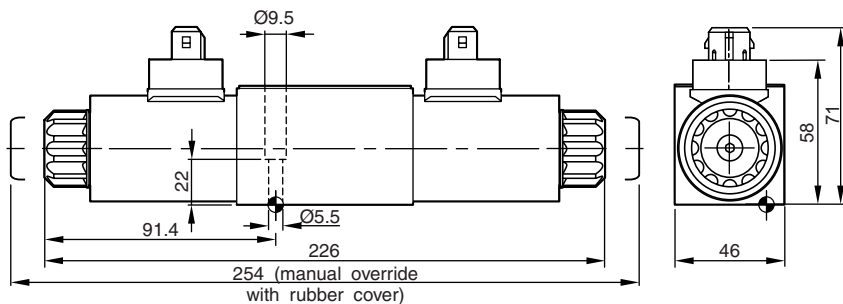

Dimensions with "Deutsch" DP4 2pin Connector (only C and D-style shown)


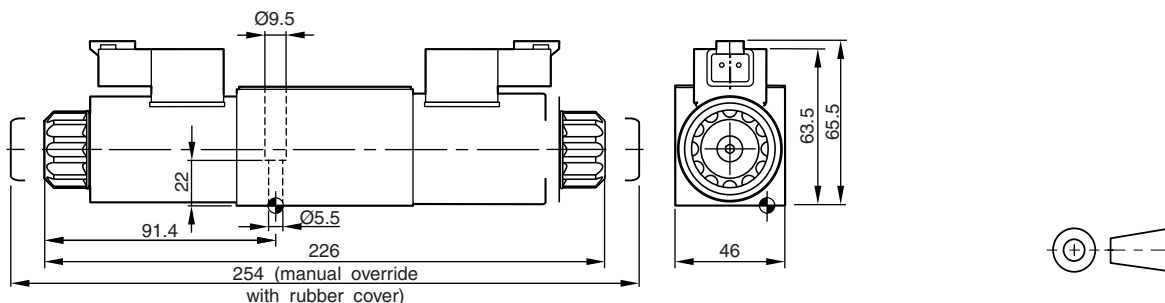


Surface finish	Kit	Kit	Kit	Kit
$\sqrt{R_{max} 6.3}$ $\square 0.01/100$	BK375	4x M5x30 DIN 912 12.9	7.6 Nm ±15%	NBR: SK-D1VW-N-91 FPM: SK-D1VW-V-91

The space necessary to remove the plug per EN 175301-803, design type AF is at least 15 mm.
The torque for the screw M3 of the plug has to be 0.5 to 0.6 Nm.

The direct operated directional control valve size NG10 is available with both Parker (series D3W) and Denison (series 4D02) model codes.

Both series are available with a soft shift option for smooth operation. An additional orifice in the solenoid anchor dampens the shifting time for D3W. For the 4D02 the orifice is located in the valve body.

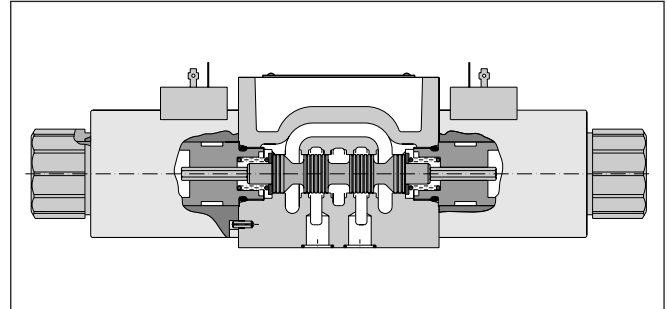

2

Technical data

General							
Design		Directional spool valve					
Actuation		Solenoid					
Size		DIN NG10 / CETOP 05 / NFPA D05					
Mounting interface		DIN 24340 A10 / ISO 4401 / CETOP RP 121-H / NFPA D05					
Mounting position		unrestricted, preferably horizontal					
Ambient temperature	[°C]	-25...+50					
Weight	[kg]	4.8 (1 solenoid), 6.3 (2 solenoids)					
Hydraulic							
Max. operating pressure	[bar]	P, A B: 350; T: 210 (DC), 105 (AC), 210 (AC Code "H")					
Fluid		Hydraulic oil in accordance with DIN 51524 / 51525					
Fluid temperature	[°C]	-25 ... +70					
Viscosity permitted	[cSt] / [mm²/s]	2.8...400					
Viscosity recommended	[cSt] / [mm²/s]	30...80					
Filtration		ISO 4406 (1999); 18/16/13 (meet NAS 1638: 7)					
Flow max.	[l/min]	150 (DC); 115 (AC)					
Leakage at 50 bar	[ml/min]	Up to 20 per flow path, depending on spool					
Static / Dynamic							
Step response		see table response time					
Electrical characteristics							
Duty ratio		100% ED; CAUTION: coil temperature up to 150 °C possible					
Max. switching frequency	[1/h]	10000					
Protection class		IP 65 in accordance with EN 60529 (plugged and mounted)					
Code		K	J	U	G	Y	T
Supply voltage / ripple	[V]	12 V =	24 V =	98 V =	205 V =	110V at 50Hz/ 120V at 60Hz	230V at 50Hz/ 240V at 60Hz
Tolerance supply voltage	[%]	±10	±10	±10	±10	±5	±5
Current consumption hold	[A]	3	1.5	0.37	0.18	0.8 / 0.72	0.4 / 0.36
Current consumption in rush	[A]	3	1.5	0.37	0.18	3.41 / 3.31	1.75 / 1.7
Power consumption hold	[W]	36	36	36	36	88 / 86	88 / 86
Power consumption in rush	[W]	36	36	36	36	375 / 397	385 / 408
Solenoid connection		Connector as per EN 175301-803, solenoid identification as per ISO 9461.					
Wiring min.	[mm²]	3 x 1.5 recommended					
Wiring length max.	[m]	50 recommended					

With electrical connections the protective conductor (PE ↓) must be connected according to the relevant regulations.

D3W stand_UK.INDD CM_21.01.2008.1



D Directional control valve
3 Size DIN NG10 CETOP 05 NFPA D05
W Wet pin solenoid
 Spool type
 Spool position
 Seals

2

3 position spools	
Code	Spool type
	a 0 b
1	
2	
3	
4	
5	
6	
7	
8 ¹⁾	
9 ¹⁾	
10 ²⁾	
11	
12	
14	
15	
16	
21 ²⁾	
22 ²⁾	
31 ²⁾	
32 ²⁾	
81 ²⁾	
82 ²⁾	
102 ²⁾	

2 position spools	
Code	Spool type
	a b
20	
26	
30	
101 ²⁾	


Code	Seals
N	NBR
V	FPM

3 position spools			
Code	all 3 position spools		
C			3 positions. Spring offset in position "0". Operated in position "a" or "b".
	Standard	Spool type 8 and 9	
E	 Operated in position "a".	 Operated in position "b".	2 positions. Spring offset in position "0".
F	 Spring offset in position "b".	 Spring offset in position "a".	2 positions. Operated in position "0".
K	 Operated in position "b".	 Operated in position "a".	2 positions. Spring offset in position "0".
M	 Spring offset in position "a".	 Spring offset in position "b".	2 positions. Operated in position "0".

2 position spools			
Code	Spool position		
B			2 positions. Spring offset in position "b". Operated in position "a".
D			2 positions. Operated in position "a" or "b". No centre or offset position.
H			2 positions. Spring offset in position "a". Operated in position "b".

**Bold letters =
 Short-term availability**

¹⁾ Consider specific spool position.
²⁾ Only available for DC voltage.

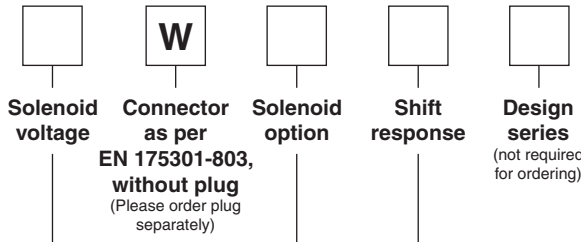


Code	Solenoid voltage
K	12V =
J	24V =
U ³⁾	98V =
G ³⁾	205V =
Y	110V 50Hz / 120V 60Hz
T	230V 50Hz / 240V 60Hz

³⁾ To be used with rectifier plug when DC solenoids are used with AC input.

Code	Shift response
omit	Standard response
S4 ⁴⁾	orifice diameter 1.0 mm
S7 ⁴⁾	orifice diameter 1.5 mm

⁴⁾ Only for DC


Code	Solenoid option
omit	Standard solenoid with manual override
H	High pressure solenoid tube for AC. Tank pressure up to 210bar
T	without manual override



The Parker model code should be used for all new applications. Otherwise also refer to Denison model code.

Further spool types and solenoid voltages on request.

2



4D02
 Directional control valve size
 DIN NG10
 CETOP 05
 NFPA D05

Body

Control

Spool type

Spool position

End cap

Design series

Code	Body
3	Standard 3-chamber
D	5-chamber for soft-shift (G3)

Code	End cap
01	for control 1
02	for control 2 and 7


Code	Control
1	1 solenoid
2	2 solenoids
7	2 solenoids and 2 pos. detent (only for spool types 11 and 51)

3 position spools		
Code	Spool position	
03		3 positions. Spring centered to "0".
05		2 positions. Spring centered energized to "b".
06		2 positions. Spring centered energized to "a".

3 position spools	
Code	Spool type
01	
02	
03	
07	
08	
09	
10	
46	
55	
56	

2 position spools		
Code	Spool position	
01		2 positions. Spring offset to "b" energized to "a".
02		2 positions. Spring offset to "a" energized to "b".
09		2 positions detent. Operated in "a" or "b". No centre or spring offset position.

2 position spools	
Code	Spool type
11	
12	
51	

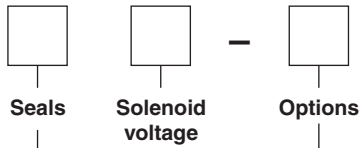

Code	Seals
1	NBR
5	FPM

Code	Solenoid voltage
G0R	12V =
G0Q	24V =
GAR *	98V =
GAG *	205V =
W30	110V 50Hz / 120V 60Hz
W31	230V 50Hz / 240V 60Hz

* To be used with rectifier plug when DC solenoids are used with AC input.

Code	Options
omit	Solenoid connector as per EN 175301-803 without plug. With manual override
G3	Soft shift with orifice in body (for DC and body D only)
32	Without manual override

DENISON	Hydraulics
<p>The Denison model code is available for existing applications. For new applications we advise to refer to Parker model code.</p>	


Further spool types and solenoid voltages on request.

The flow curve diagram shows the flow versus pressure drop curves for all spool types. For each spool type, operating position and flow direction the relevant curve number is given in the table below.

2

Spool		Position „b“		Position „a“		Position „0“					
D3W	4D02	P->A	B->T	P->B	A->T	P->A	P->B	A->T	B->T	P->T	A->B
1	03	4	3	4	3	-	-	-	-	-	-
2	01	4	1	4	1	3	3	1	1	5	1
3	10	4	3	5	2	-	-	4	-	-	-
4	08	4	2	4	2	-	-	3	3	-	5
5	-	4	3	5	3	5	-	-	-	-	-
6	46	4	3	4	3	6	6	-	-	-	6
7	-	5	1	4	3	-	4	-	2	6	-
10	-	4	-	4	-	-	-	-	-	-	-
11	02	4	3	4	3	-	-	8	8	-	-
12	-	4	3	4	3	7	7	7	7	8	8
14	-	4	3	5	1	4	-	2	-	6	-
15	09	5	2	4	3	-	-	-	4	-	-
16	-	5	3	4	3	-	5	-	-	-	-
20	51	4	3	4	3	-	-	-	-	-	-
26	12	4	-	4	-	-	-	-	-	-	-
30	11	4	2	4	2	-	-	-	-	-	-
		P->B	A->T	P->A	B->T	P->A	P->B	A->T	B->T	P->T	A->B
8	-	4	3	4	3	-	-	-	-	6	-
9	07	4	4	4	4	-	-	-	-	6	-
		Position „b“		Position „a“							
		P->A	P->B	A->B	P->B	A->T					
21	55	5	4	6	3	3					
		P->A	B->T		P->A	P->B	A->B				
22	56	3	3		4	5	6				

Flow curve diagram

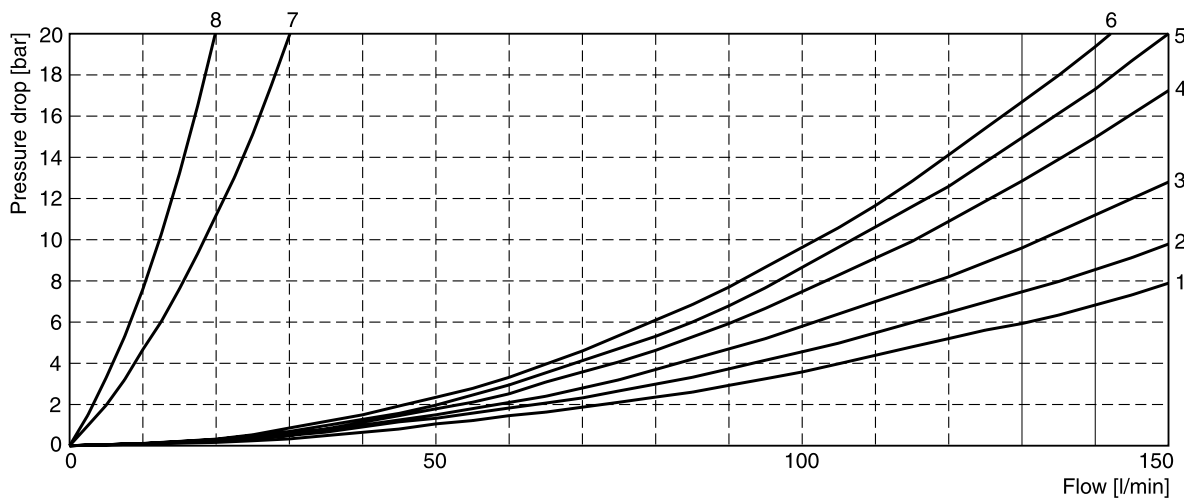


D3W stand_UK.INDD CM_21.01.2008.1


The diagram below specifies the shift limits for valves with DC and AC solenoids. Valves with spool position "F" or "M" can only be operated up to 70% of the limits. The specifications apply to a viscosity 35mm²/s and bal-

anced flow conditions. The shift limits can be considerably lower at unbalanced flow conditions. To avoid flow rates beyond the shift limits, a plug-in orifice can be inserted in the P-port.

Shift limits, DC voltage *

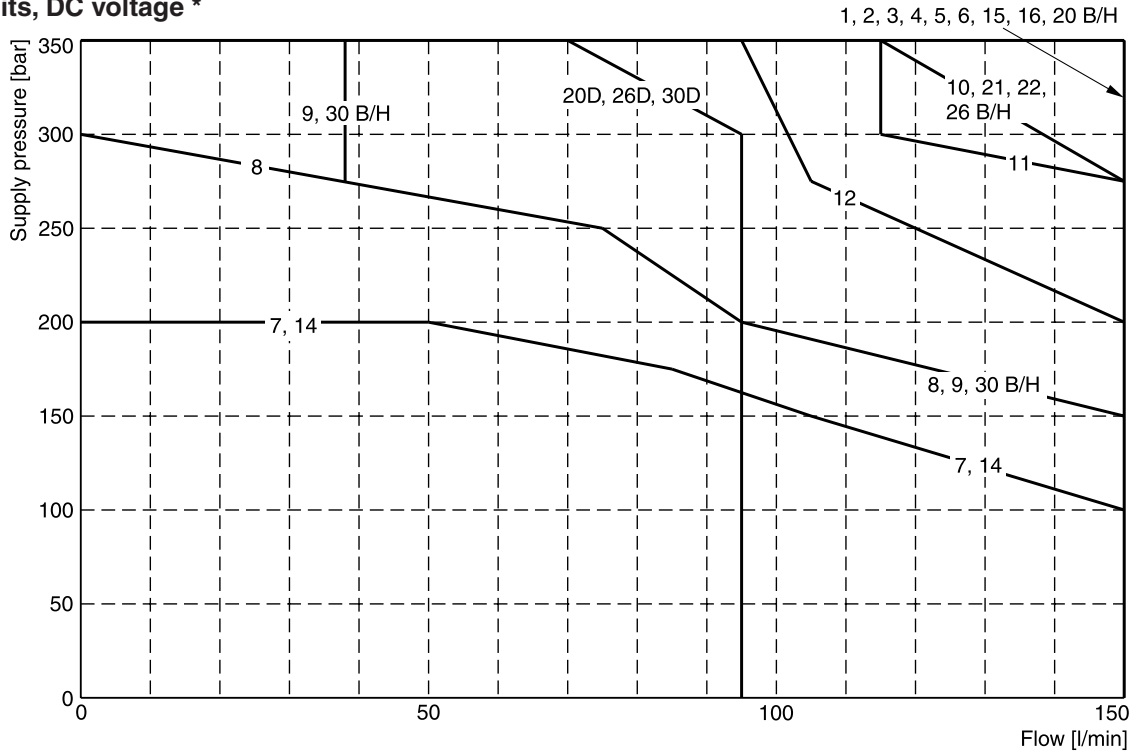

Shift limits, AC voltage *

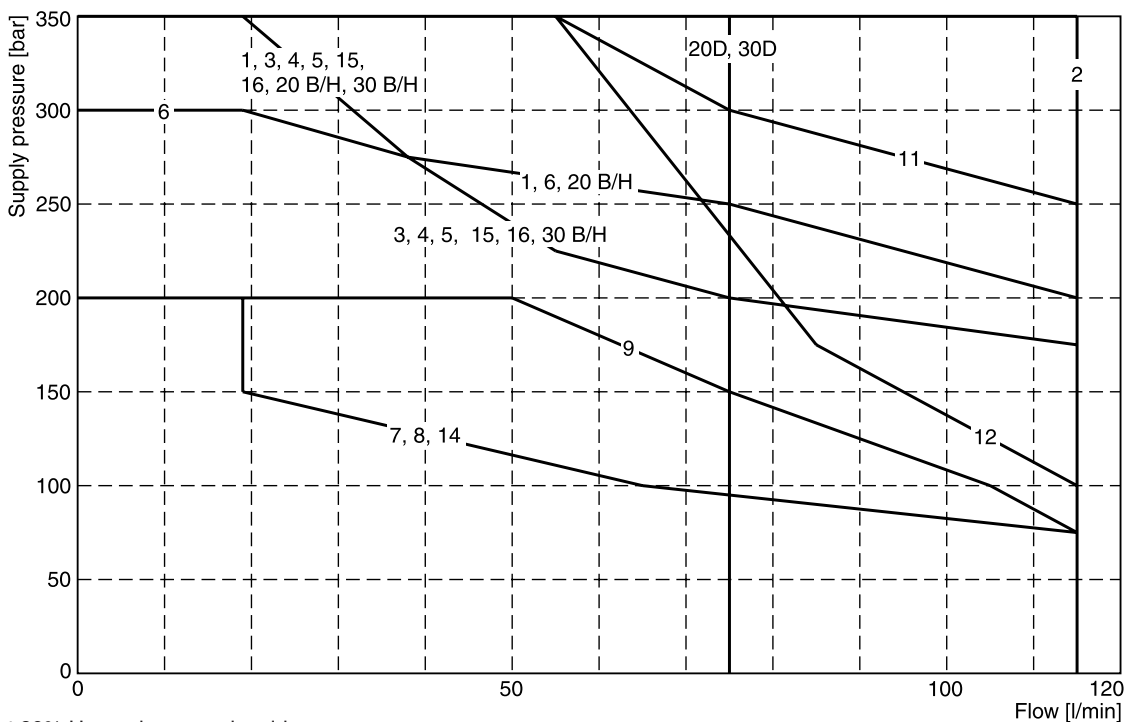

Measured at 90% U_{nom} and warm solenoids.

* For 4D02 spool code see flow curve table.


D3W stand_UK.INDD CM_21.01.2008.1

Shift limits soft shift

The diagram below specifies the shift limits. Valves with spool position “F” or “M” can only be operated up to 70% of the limits. The specifications apply to a viscosity 35mm²/s and balanced flow conditions. The shift limits can

be considerably lower at unbalanced flow conditions. To avoid flow rates beyond the shift limits, a plug-in orifice can be inserted in the P-port.

2

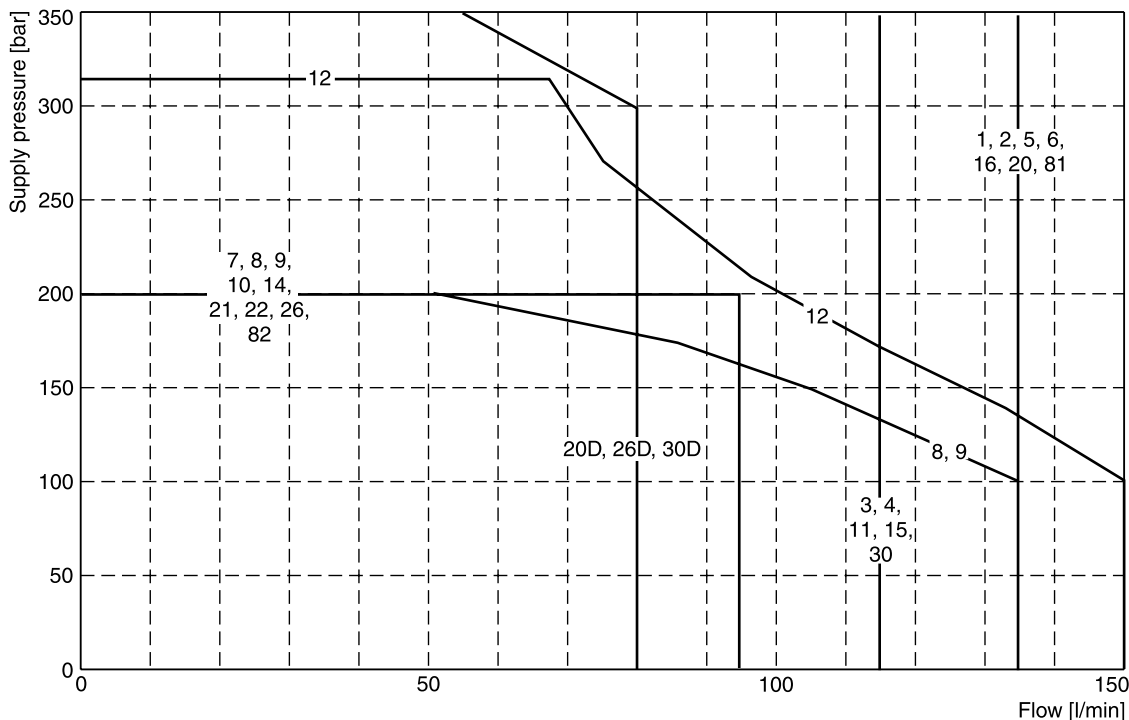

Measured at 90% U_{nom} and warm solenoids.



Response times D3W Soft Shift

Code	Orifice size	Energize	De-energize
(Standard)	–	105 ms (DC) 21 ms (AC)*	85 ms (DC) 35 ms (AC)*
S4	1.0 mm	320 ms	550 ms
S7	1.75 mm	160 ms	370 ms

Step response times were obtained under the following conditions: $\nu = 35 \text{ mm}^2/\text{s}$ at 50°C with the valve operating at 175 bar and 65 l/min. Published response times are nominal and may vary with spool, flow, pressure and temperature.

* For AC input and soft shift use rectifier plug.


Acceleration for different orifice sizes (archived against a valve without soft shift)

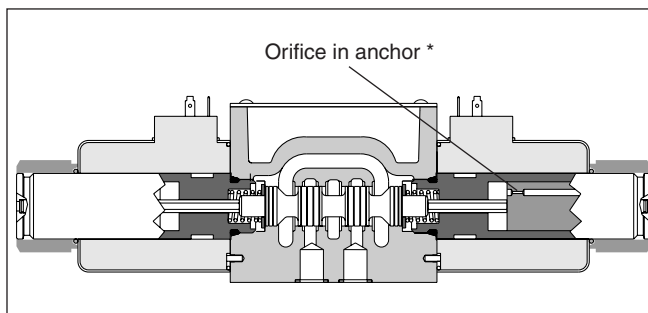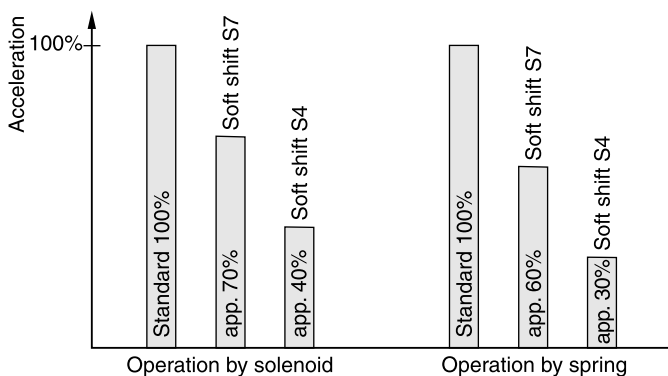


* Note: For 4D02 the orifice is located in the Z-channel of the valve body.

For even softer shifting, the proportional spools 81, 82, 101 and 102 can be used.



**Interface EN 175301-803, DC solenoid
B, E, F -style**

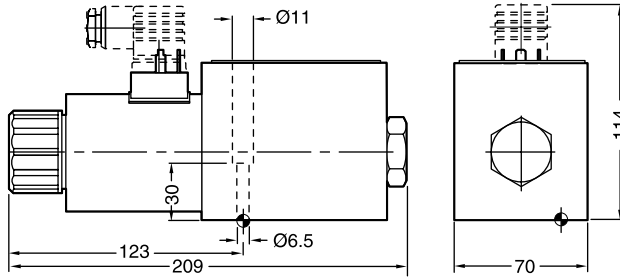


H, K, M -style

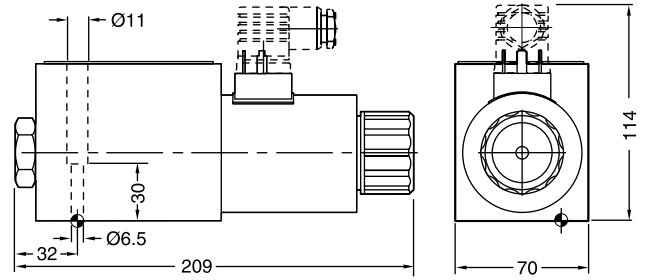


C, D -style

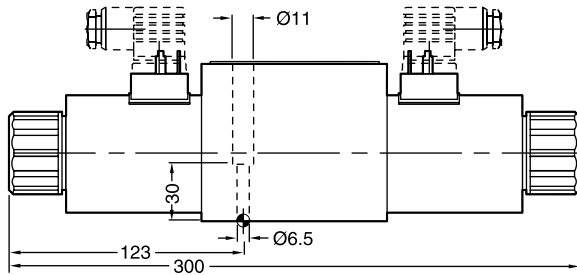



**Interface EN 175301-803, AC solenoid
B, E, F -style**

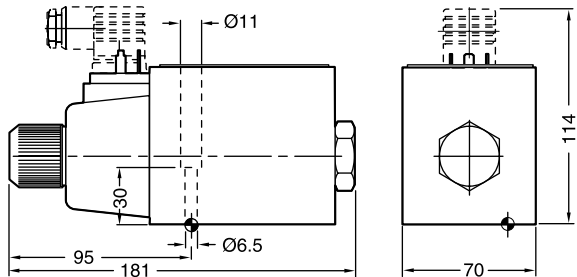



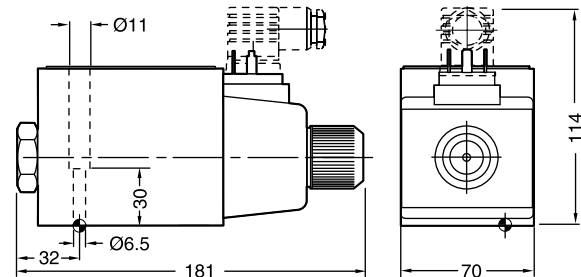


H, K, M -style

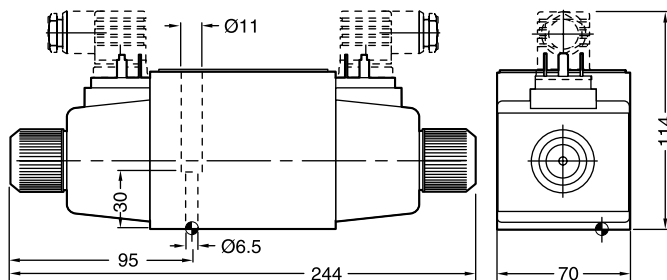

C, D -style




Surface finish	 Kit			 Kit
	BK385	4x M6x40 DIN 912 12.9	13.2 Nm ±15%	NBR: SK-D3W-30 FPM: SK-D3W-V30

The space necessary to remove the plug per EN 175301-803, design type AF is at least 15 mm.
The torque for the screw M3 of the plug has to be 0.5 to 0.6 Nm.

D3W stand_UK.INDD CM_21.01.2008.1

The 4/2 directional valves operated directly by solenoids with inductive position control are used as monitoring valves. The start or end position can be monitored. The position control is only available for single solenoid valves.


The fail-safe position of the directional valve during power failure is the spring offset position.



2

Attention

The adjustment of the position control is factory set and sealed. Replacement and repairs can only be undertaken by the manufacturer.

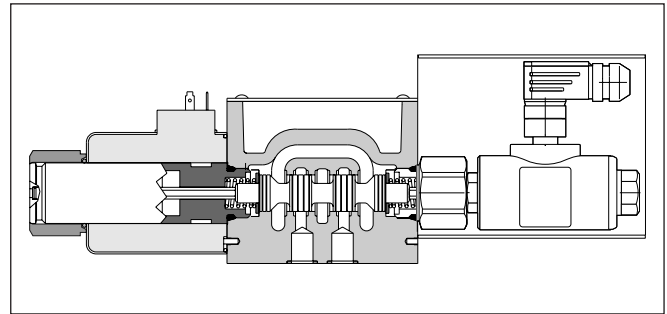

Technical data

General					
Design		Directional spool valve			
Actuation		Solenoid			
Size		DIN NG10 / CETOP 05 / NFPA D05			
Mounting interface		DIN 24340 A10 / ISO 4401 / CETOP RP 121-H / NFPA D05			
Mounting position		unrestricted, preferably horizontal			
Ambient temperature	[°C]	0...+50			
Weight	[kg]	5.2			
Hydraulic					
Max. operating pressure	[bar]	P, A, B: 350; T: 210			
Fluid		Hydraulic oil in accordance with DIN 51524 / 51525			
Fluid temperature	[°C]	0 ... +70			
Viscosity permitted	[cSt] / [mm ² /s]	2.8...400			
Viscosity recommended	[cSt] / [mm ² /s]	30...80			
Filtration		ISO 4406 (1999); 18/16/13 (meet NAS 1638: 7)			
Flow max.	[l/min]	150			
Leakage at 50 bar	[ml/min]	Up to 20 per flow path, depending on spool			
Static / Dynamic					
Step response at 95%		Energized: 105; De-energized: 85			
Electrical characteristics					
Duty ratio		100% ED; CAUTION: coil temperature up to 150 °C possible			
Max. switching frequency	[1/h]	10000			
Protection class		IP 65 in accordance with EN 60529 (plugged and mounted)			
	Code	K	J	U	G
Supply voltage / ripple	[V]	12 V =	24 V =	98 V =	205 V =
Tolerance supply voltage	[%]	±10	±10	±10	±10
Current consumption hold	[A]	3	1.5	0.37	0.18
Power consumption hold	[W]	36	36	36	36
Solenoid connection		Connector as per EN 175301-803, solenoid identification as per ISO 9461.			
Wiring min.	[mm ²]	3 x 1.5 recommended			
Wiring length max.	[m]	50 recommended			

With electrical connections the protective conductor (PE ⚡) must be connected according to the relevant regulations.

D3W poscontr_UK.INDD CM_22.01.2008.1



D Directional control valve
3 Size DIN NG10 CETOP 05 NFPA D05
W Wet pin solenoid
Spool type
Spool position
Seals

2

3 position spools	
Code	Spool type
	a 0 b
1	
2	
3 ¹⁾	
4	
5 ²⁾	
15 ²⁾	
16 ¹⁾	
21 ¹⁾	
22 ²⁾	


2 position spools	
Code	Spool type
	a b
20	
26	
30	

¹⁾ Only available for spool pos. "K" and "M"
²⁾ Only available for spool pos. "E" and "F"

Code	Seals
N	NBR
V	FPM

3 position spools	
Code	Spool position
E	2 positions. Spring offset in position "0". Operated in position "a".
F	2 positions. Spring offset in position "b". Operated in position "0".
K	2 positions. Spring offset in position "0". Operated in position "b".
M	2 positions. Spring offset in position "a". Operated in position "0".

2 position spools	
Code	Spool position
B	2 positions. Spring offset in position "b". Operated in position "a".
H	2 positions. Spring offset in position "a". Operated in position "b".

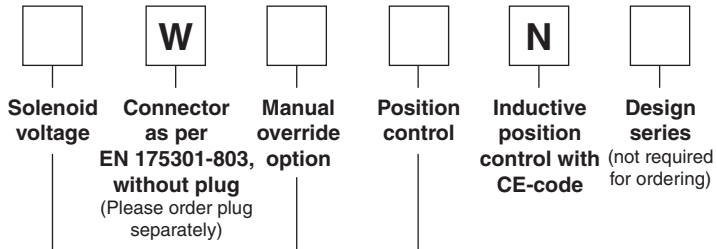

Code	Solenoid voltage
K	12V =
J	24V =
U ³⁾	98V =
G ³⁾	205V =

³⁾ For alternating current use plug with rectifier. Please order rectifier plug separately.

Code	Solenoid option
omit	Standard valve without options
T ⁴⁾	without manual override

⁴⁾ For hydraulic presses according to the safety regulations EN 693, solenoid option "T" (without manual override) and accessories "I4" or "I5" (start position monitored) are required.

Code	Spool position	Position control
I2	E, F, B (Solenoid on a-side)	End position monitored side B
I5 ⁴⁾		Start position monitored side B
I1	K, M, H (Solenoid on b-side)	End position monitored side A
I4 ⁴⁾		Start position monitored side A


Further spool types and solenoid voltages on request.

Electrical characteristics of position control as per IEC 61076-2-101 (M12x1)

Protection class		IP 65 in accordance with EN 60529 (plugged and mounted)
Ambient temperature	[°C]	0...+50
Supply voltage / ripple	[V]	18...42 / 10%
Current consumption without load	[mA]	≤ 30
Max. output current per channel, ohmic	[mA]	400
Min. output load per channel, ohmic	[kOhm]	100
Max. output drop at 0.2A	[V]	≤ 1.1
Max. output drop at 0.4A	[V]	≤ 1.6
EMC		EN50081-1 / EN50082-2
Max. tolerance ambient field strength	[A/m]	<1200
Min. distance to next AC solenoid	[m]	>0.1
Interface		M12x1
Wiring min.	[mm²]	5 x 0.25 brad shield recommended
Wiring length max.	[m]	50 recommended

2

M12 pin assignment




Start position monitored

- 1 + Supply 18...42V
- 2 Normally open B
- 3 0V
- 4 Normally open A
- 5 Earth ground

End position monitored

- 1 + Supply 18...42V
- 2 Normally closed B
- 3 0V
- 4 Normally open A
- 5 Earth ground

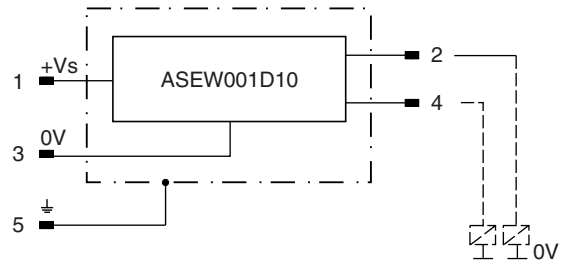

Definitions

Start position monitored:

The valve is de-energized. The inductive switch gives a signal at the moment when the spool leaves the spring offset position (below 15% spool stroke).

End position monitored:

The inductive switch gives a signal before the end position is reached (above 85% spool stroke).


The switch can only be located on the opposite side of the solenoid for direct operated valves.

The flow curve diagram shows the flow versus pressure drop curves for all spool types. The relevant curve number for each spool type, operating position and flow direction is given in the table below.

Spool	Position „b“		Position „a“		Position „0“						
	P->A	B->T	P->B	A->T	P->A	P->B	A->T	B->T	P->T	A->B	
1	4	3	4	3	–	–	–	–	–	–	
2	4	1	4	1	3	3	1	1	5	1	
3	4	3	–	–	–	–	4	–	–	–	
4	4	2	4	2	–	–	3	3	–	5	
5	–	–	5	3	5	–	–	–	–	–	
15	–	–	4	3	–	–	–	4	–	–	
16	5	3	–	–	–	5	–	–	–	–	
20	4	3	4	3	–	–	–	–	–	–	
26	4	–	4	–	–	–	–	–	–	–	
30	4	2	4	2	–	–	–	–	–	–	
	Position „b“		Position „a“								
	P->A	P->B	A->B	P->B	A->T						
21	5	4	6	–	–						
	P->A	B->T		P->A	P->B	A->B					
22	–	–		4	5	6					

2


Flow curve diagram

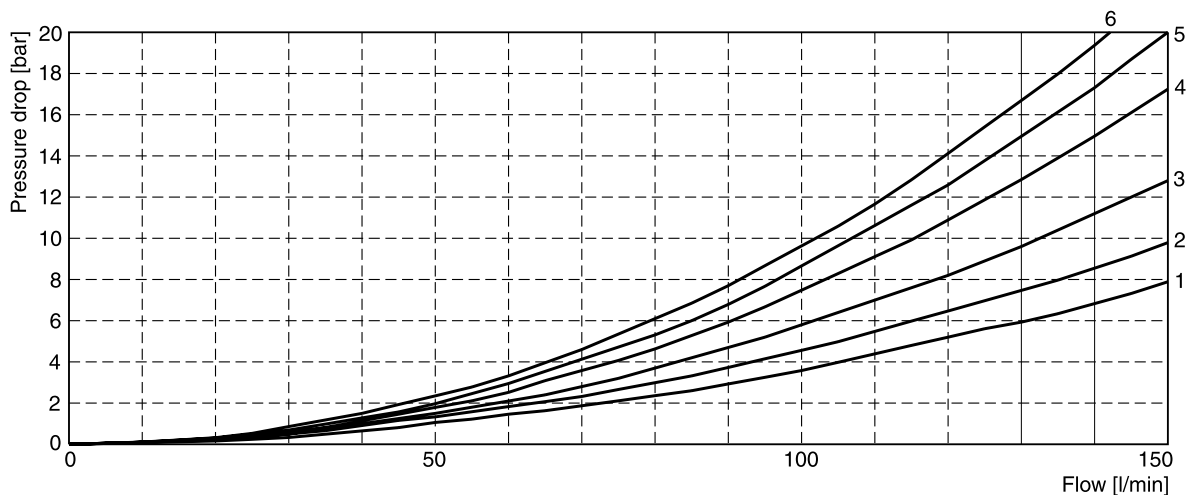

Shift limit diagram

The diagram below specifies the shift limits. Valves with spool position “F” or “M” can only be operated up to 70% of the limits. The specifications apply to a viscosity 35mm²/s and balanced flow conditions. The shift limits can


be considerably lower at unbalanced flow conditions. To avoid flow rates beyond the shift limits, a plug-in orifice can be inserted in the P-port.

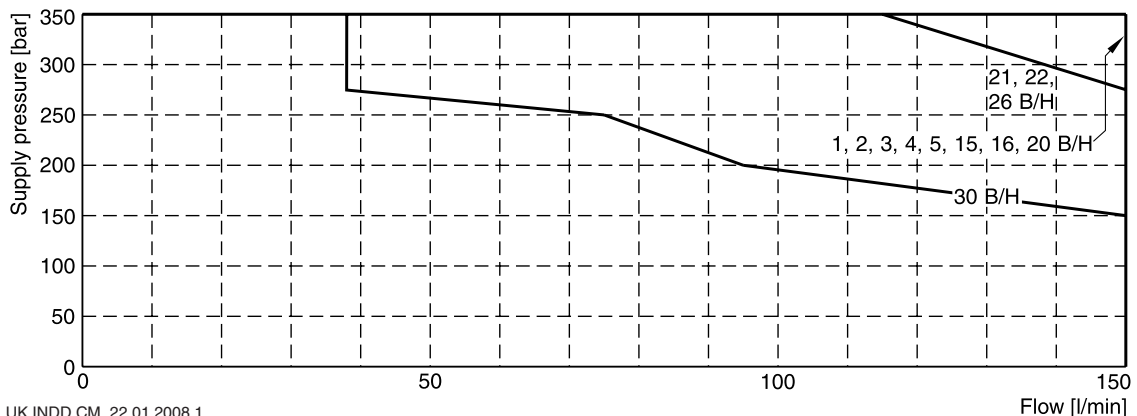


Dimensions

2


Interface EN 175301-803, DC solenoid, with plug M12x1*
B, E, F -style

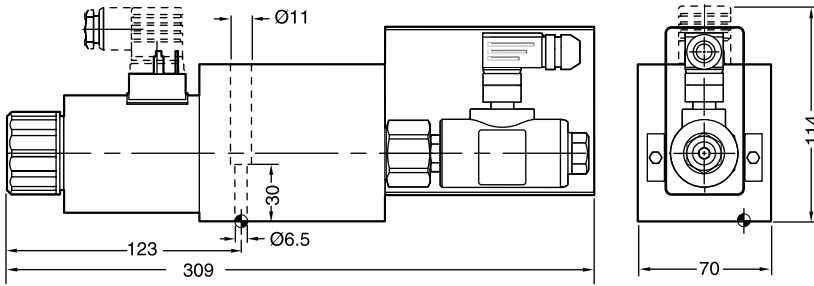



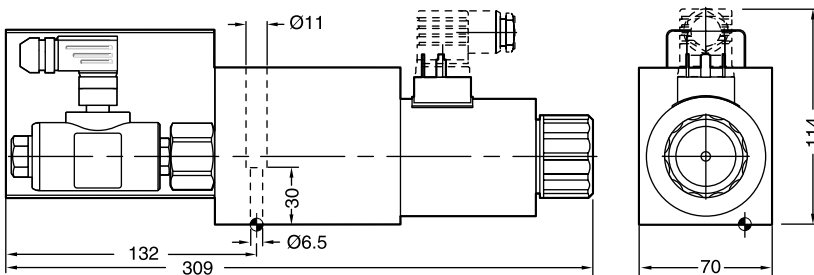


H, K, M -style



* Delivery includes plug M12 x 1 (see accessories, plug M12x1; order no.: 5004109).



Surface finish	 Kit	 Kit	 Kit	 Kit
	BK385	4x M6x40 DIN 912 12.9	13.2 Nm ±15%	NBR: SK-D3W-30 FPM: SK-D3W-V30

The space necessary to remove the plug per EN 175301-803, design type AF is at least 15 mm.
The torque for the screw M3 of the plug has to be 0.5 to 0.6 Nm.

Attention



The adjustment of the position control is factory set and sealed. Replacement and repairs can only be undertaken by the manufacturer.

The D3MW is a solenoid operated directional control valve size NG10 in 3-chamber design. It is direct operated by wet pin solenoids.

The D3MW is designed for mobile and marine applications. It is based on the D3W series, but offers additional corrosion protection of the valve body, the solenoid coil and the anchor tube as well as the typical solenoid connections for the mobile market such as AMP Junior Timer.

Technical features:

- High corrosion protection
- Solenoid connection:
 - Standard (as per EN175301-803)
 - AMP Junior Timer
- Robust design for rough applications

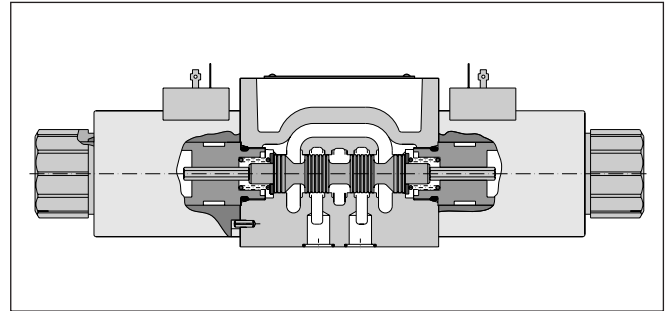

2

Technical data

General		Directional spool valve	
Design		Solenoid	
Actuation		DIN NG10 / CETOP 05 / NFPA D05	
Size		DIN 24340 A10 / ISO 4401 / CETOP RP 121-H / NFPA D05	
Mounting interface		unrestricted, preferably horizontal	
Mounting position		unrestricted, preferably horizontal	
Ambient temperature		[°C]	-25...+50
Weight		[kg]	4.8 (1 solenoid), 6.3 (2 solenoids)
Hydraulic			
Max. operating pressure		[bar]	P, A B: 350; T: 210
Fluid		Hydraulic oil in accordance with DIN 51524 / 51525	
Fluid temperature		[°C]	-25 ... +70
Viscosity permitted		[cSt] / [mm ² /s]	2.8...400
Viscosity recommended		[cSt] / [mm ² /s]	30...80
Filtration		ISO 4406 (1999); 18/16/13 (meet NAS 1638: 7)	
Flow max.		[l/min]	150
Leakage at 50 bar		[ml/min]	Up to 20 per flow path, depending on spool
Static / Dynamic			
Step response at 95%		[ms]	Energized: 105 De-energized: 85
Electrical characteristics			
Duty ratio		100% ED; CAUTION: coil temperature up to 150 °C possible	
Max. switching frequency		[1/h]	10000
Protection class		IP 65 in accordance with EN60529 (plugged and mounted)	
Code		K	J
Supply voltage / ripple		12 V =	24 V =
Tolerance supply voltage		±10	±10
Current consumption		3	1.5
Power consumption		36	36
Solenoid connection		Connector as per EN 175301-803, AMP Junior Timer, Solenoid ident. as per ISO 9461.	
Wiring min.		[mm ²]	3 x 1.5 recommended
Wiring length max.		[m]	50 recommended

With electrical connections the protective conductor (PE \perp) must be connected according to the relevant regulations.



D Directional control valve
3 Size DIN NG 10 CETOP 05 NFPA D05
M 3-chamber valve for mobile and marine applications
W Wet pin solenoid
Spool type
Spool position
NBR Seal

2


3 position spools	
Code	Spool type
1	
2	
4	
6	
8 ¹⁾	
11	
21	
22	
81	
82	

2 position spools	
Code	Spool type
20	
30	

¹⁾ Consider specific spool position.

3 position spools			
Code	all 3 position spools		
C			3 positions. Spring offset in position "0". Operated in position "a" or "b".
	Standard	Spool type 8 and 9	
E	 Operated in position "a".	 Operated in position "b".	2 positions. Spring offset in position "0".
F	 Spring offset in position "b".	 Spring offset in position "a".	2 positions. Operated in position "0".
K	 Operated in position "b".	 Operated in position "a".	2 positions. Spring offset in position "0".
M	 Spring offset in position "a".	 Spring offset in position "b".	2 positions. Operated in position "0".

2 position spools		
Code	Spool position	
B		2 positions. Spring offset in position "b". Operated in position "a".
D		2 positions. Operated in position "a" or "b". No centre or offset position.
H		2 positions. Spring offset in position "a". Operated in position "b".

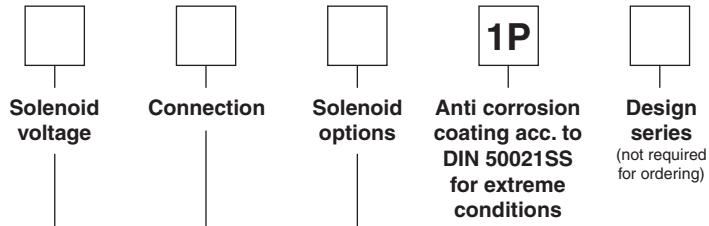

Code	Voltage
K	12V =
J	24V =

Code	Connection
W ²⁾	Connector as per EN 175301-803
A ²⁾	2-pin AMP Junior Timer

²⁾ Please order plug separately.

Code	Solenoid option
omit	Standard solenoid
T	without manual override


Further spool types on request.

The flow curve diagram shows the flow versus pressure drop for each spool type, operating position and flow direction is given in the table below.

2

Spool	Position „b“		Position „a“		Position „0“					
	P->A	B->T	P->B	A->T	P->A	P->B	A->T	B->T	P->T	A->B
1	4	3	4	3	-	-	-	-	-	-
2	4	1	4	1	3	3	1	1	5	1
4	4	2	4	2	-	-	3	3	-	5
6	4	3	4	3	6	6	-	-	-	6
11	4	3	4	3	-	-	8	8	-	-
20	4	3	4	3	-	-	-	-	-	-
30	4	2	4	2	-	-	-	-	-	-
	P->B	A->T	P->A	B->T	P->A	P->B	A->T	B->T	P->T	A->B
8	4	3	4	3	-	-	-	-	6	-
	Position „b“		Position „a“							
	P->A	P->B	A->B	P->B	A->T					
21	5	4	6	3	3					
	P->A	B->T		P->A	P->B	A->B				
22	3	3		4	5	6				


Flow curve diagram

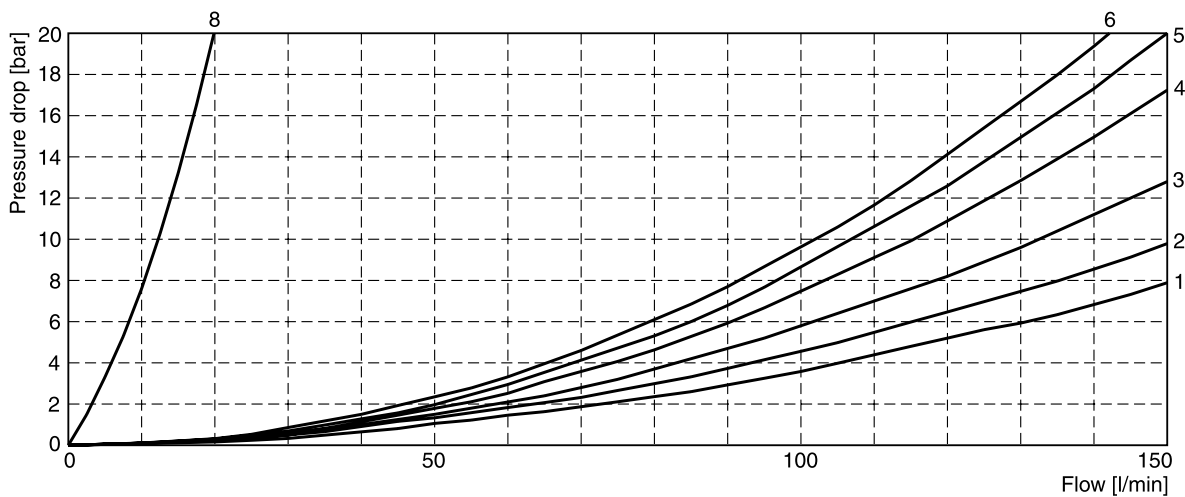

The diagram below specifies the shift limits for valves with DC solenoids. Valves with spool position "F" or "M" can only be operated up to 70% of the limits. The specifications apply to a viscosity 35mm²/s and balanced flow conditions. The shift limits can be considerably lower at unbalanced flow conditions. To avoid flow rates beyond the shift limits, a plug-in orifice can be inserted in the P-port.

The diagram below specifies the shift limits for valves with DC solenoids. Valves with spool position "F" or "M" can only be operated up to 70% of the limits. The specifications apply to a viscosity 35mm²/s and balanced flow conditions. The shift limits can be considerably lower at unbalanced flow conditions. To avoid flow rates beyond the shift limits, a plug-in orifice can be inserted in the P-port.

Shift limits, DC voltage

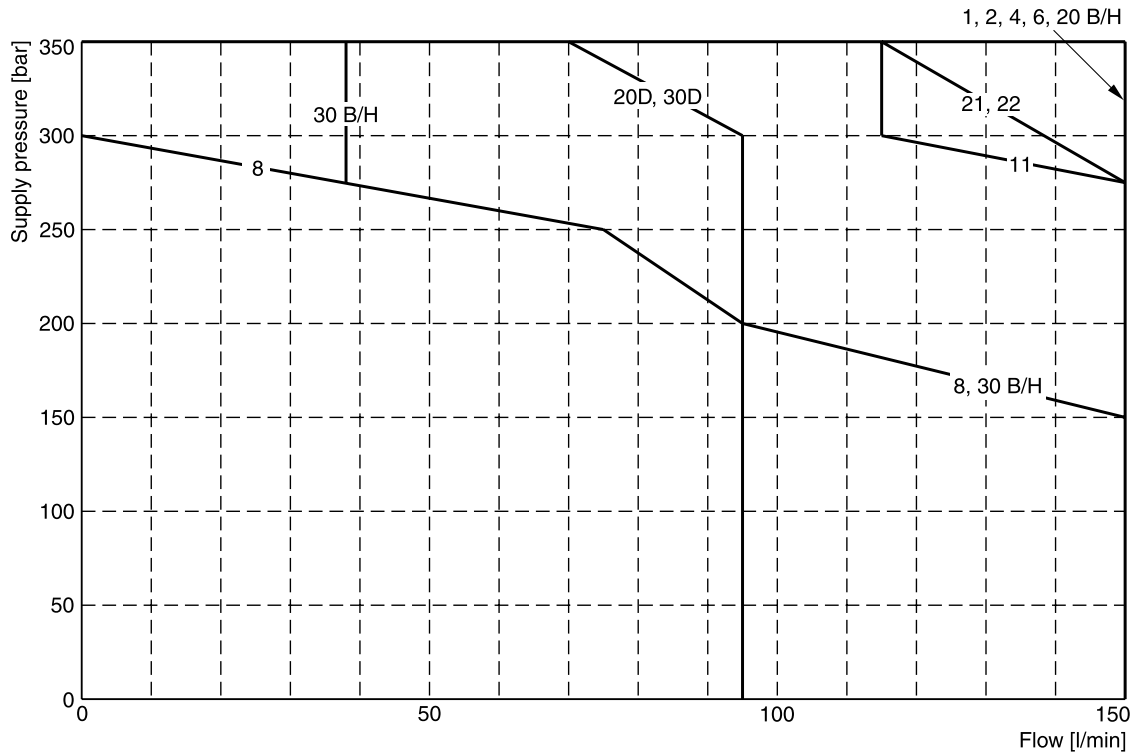


Measured at 90% U_{nom} and warm solenoids.


Dimensions

2


Interface EN 175301-803, DC solenoid
B, E, F -style

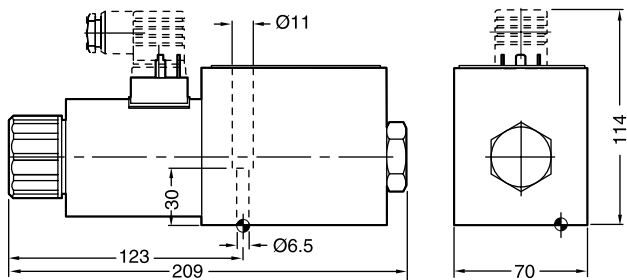


H, K, M -style

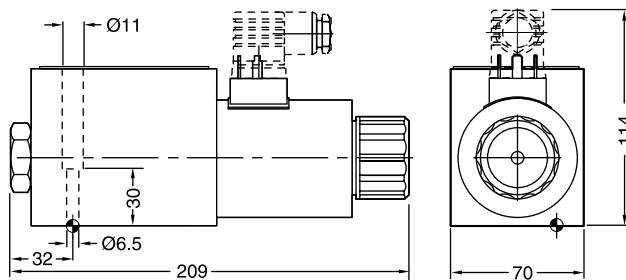


C, D -style

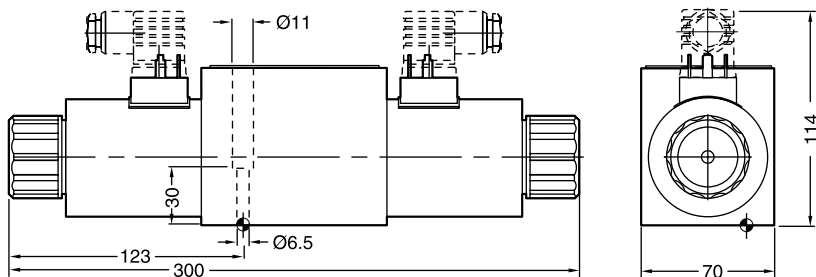



Dimensions with AMP Connector
B, E, F -style

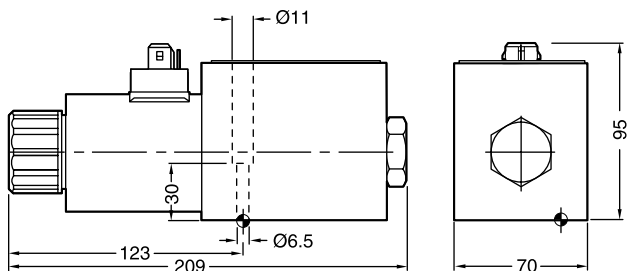



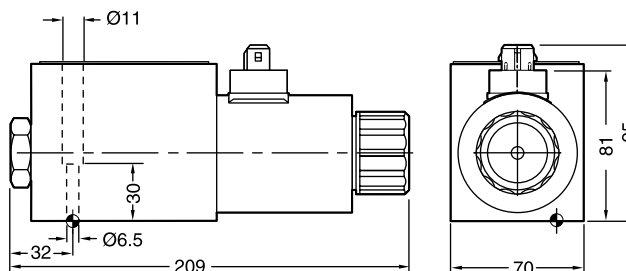


H, K, M -style

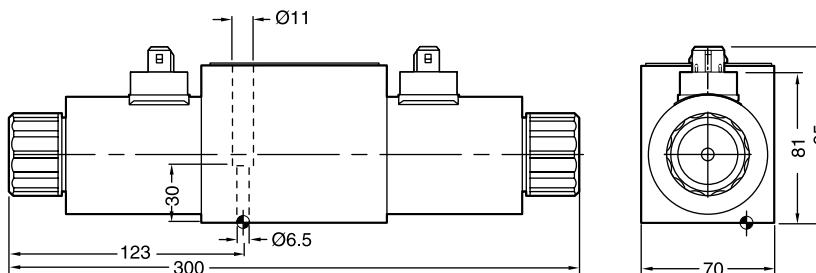

C, D -style



Surface finish	 Kit	 Kit	 Kit	 Kit
$\sqrt{R_{max} 6.3}$ 	BK385	4x M6x40 DIN 912 12.9	13.2 Nm ±15%	NBR: SK-D3W-30 FPM: SK-D3W-V30

The space necessary to remove the plug per EN 175301-803, design type AF is at least 15 mm.
The torque for the screw M3 of the plug has to be 0.5 to 0.6 Nm.

D3MW_UK.INDD CM_22.01.2008.1

The pilot operated directional valves are available with both Parker (series D31DW, D41VW, D81/D91VW and D111VW) and Denison (series 4D02V, 4D03, 4D06) model codes. All valves are pilot operated by an NG6 valve.


Pressure and flow of the pilot oil have a significant influence on the response time of the spool in the main stage.

In order to guarantee a save switching of the spool please choose the appropriate pilot oil supply and drain option. (Spools with a connection P to T need an external pressure supply or an integral check valve. For spools with negative cross-over position the same options are recommended.)

The minimum pilot pressure must be ensured for all operating conditions of the directional valve.



D31DW



2



4D02V



D41VW




D81VW



D111VW

D81VW

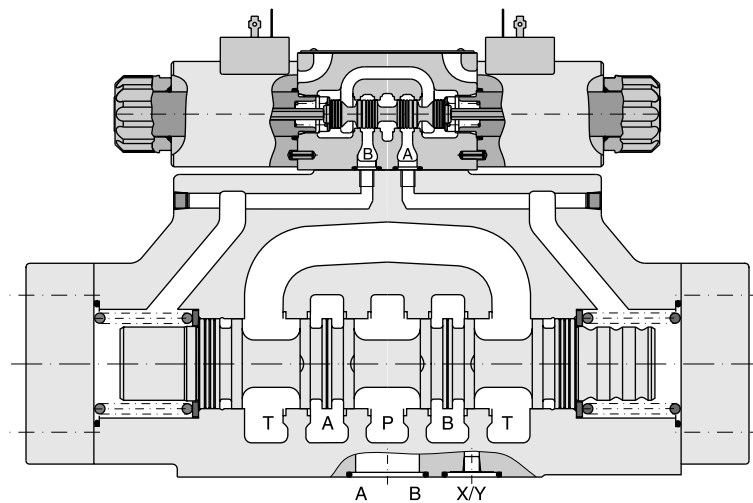

Ordering Code

2

D

1

W

Directional control valve

Series

Pilot NG 06

Style

Electrically operated

Spool type

Spool position

Code	Bore	Size
3	Ø11mm	NG10
4	Ø20mm	NG16
8	Ø26mm	NG25
9	Ø32mm	NG25
11	Ø50mm	NG32

Code	Style
D	D3
V	D4, D8/9, D111

3 position spools	
Code	Spool type
	a 0 b
001 ²⁾	
002 ²⁾	
003 ³⁾	
004 ³⁾	
005 ³⁾	
006 ³⁾	
007 ³⁾	
009 ¹⁾²⁾	
011 ³⁾	
014 ³⁾	
015 ³⁾	
016 ³⁾	
021 ³⁾	
022 ³⁾	
031 ⁵⁾	
032 ⁵⁾	
054 ⁴⁾	
081 ²⁾	
082 ²⁾	


2 position spools	
Code	Spool type
	a b
020 ²⁾	
026 ³⁾	
030 ²⁾	

- 1) Consider specific spool position.
- 2) All sizes (D31, D41, D81, D 91, D111) available
- 3) Only D31, D41, D81, D91 available
- 4) Only D41, D81, D91, D111 available
- 5) Only D31, D81, D91 available

3 position spools		
Code	all 3 position spools	
C²⁾		3 positions. Spring offset in position "0". Operated in position "a" or "b".
	Standard	Spool type 009
E ²⁾		 Operated in position "b". Spring offset in position "0".
F ²⁾		 Spring offset in position "a". Operated in position "0".
K ²⁾		 Operated in position "b". Operated in position "a". Spring offset in position "0".
M ²⁾		 Spring offset in position "a". Spring offset in position "b". Operated in position "0".
R ³⁾		 No centre in offset position. No centre in offset position. 2 positions, detent. Operated in position "0" or "b".
S ³⁾		 No centre in offset position. No centre in offset position. 2 positions, detent. Operated in position "0" or "a". No centre in offset position.

2 position spools		
Code	Spool position	
B²⁾		Spring offset in position "b". Operated in position "a".
D ³⁾		Detent, operated in position "a" or "b". No centre or offset position.
H ²⁾		Spring offset in position "a". Operated in position "b".

Bold letters = Short-term availability

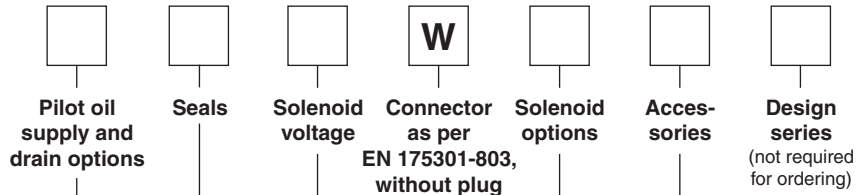

Code	Inlet	Outlet
1	Internal	External
2	External	External
3 ⁶⁾	Integral check valve	External
4 ⁷⁾	Internal	Internal
5	External	Internal
6 ⁶⁾	Integral check valve	Internal

⁶⁾ Only D41, D81 available.
⁷⁾ Not for spools 002, 007, 009, 014, 030, 031, 032, 054 available.

Code	Seals
N	NBR
V	FPM

Code	Voltage
K	12V =
J	24V =
U ⁸⁾	98V =
G ⁸⁾	205V =
Y	110V 50Hz / 120V 60Hz
T	230V 50Hz / 240V 60Hz

⁸⁾ For AC voltage use plug with rectifier. Please order rectifier plug separately.

Code	Solenoid option
omit	Standard solenoid without options
T	without manual override


Code	Accessories
omit	Standard valve w/o accessories
3C	Pilot with press. reducing valve
3A	Pilot choke, meter-out
3D ⁹⁾	Stroke adjustment side B
3E ⁹⁾	Stroke adjustment side A
3B	Pilot choke, meter-in
3F	Stroke adjustment side A and B

⁹⁾ Only D31, D41, D81, D91 available.

Bold letters = Short-term availability

Further spool types and solenoid voltages on request.
 Explosion proof solenoids EEx me II on request.

2

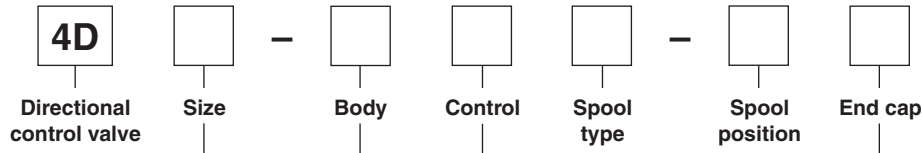

Code	Size
02	NG10
03	NG16
06	NG25

Code	Body
V	for 4D02
3	for 4D03/06

Code	Control
A	1 solenoid
B	2 solenoids
C	2 solenoids and 2 pos. detent pilot valve


3 position spools	
Code	Spool type
	a 0 b
01	
02	
03	
07	
08	
09	
10	
13	
14	
46	
55	
56	

2 position spools	
Code	Spool type
	a b
11	
51	

Code	End cap
03	Standard
09	With stroke adjustment on both sides

3 position spools	
Code	Spool position
03	3 positions. Spring centered to "0".
05	2 positions. Spring centered to "0". Energized to "b".
06	2 positions. Spring centered to "0". Energized to "a".


2 position spools	
Code	Spool position
01	2 positions. Spring offset to "b". Energized to "a".
02	2 positions. Spring offset to "a". Energized to "b".
04	2 positions detent. Operated in "a" or "b". No centre or spring offset position.

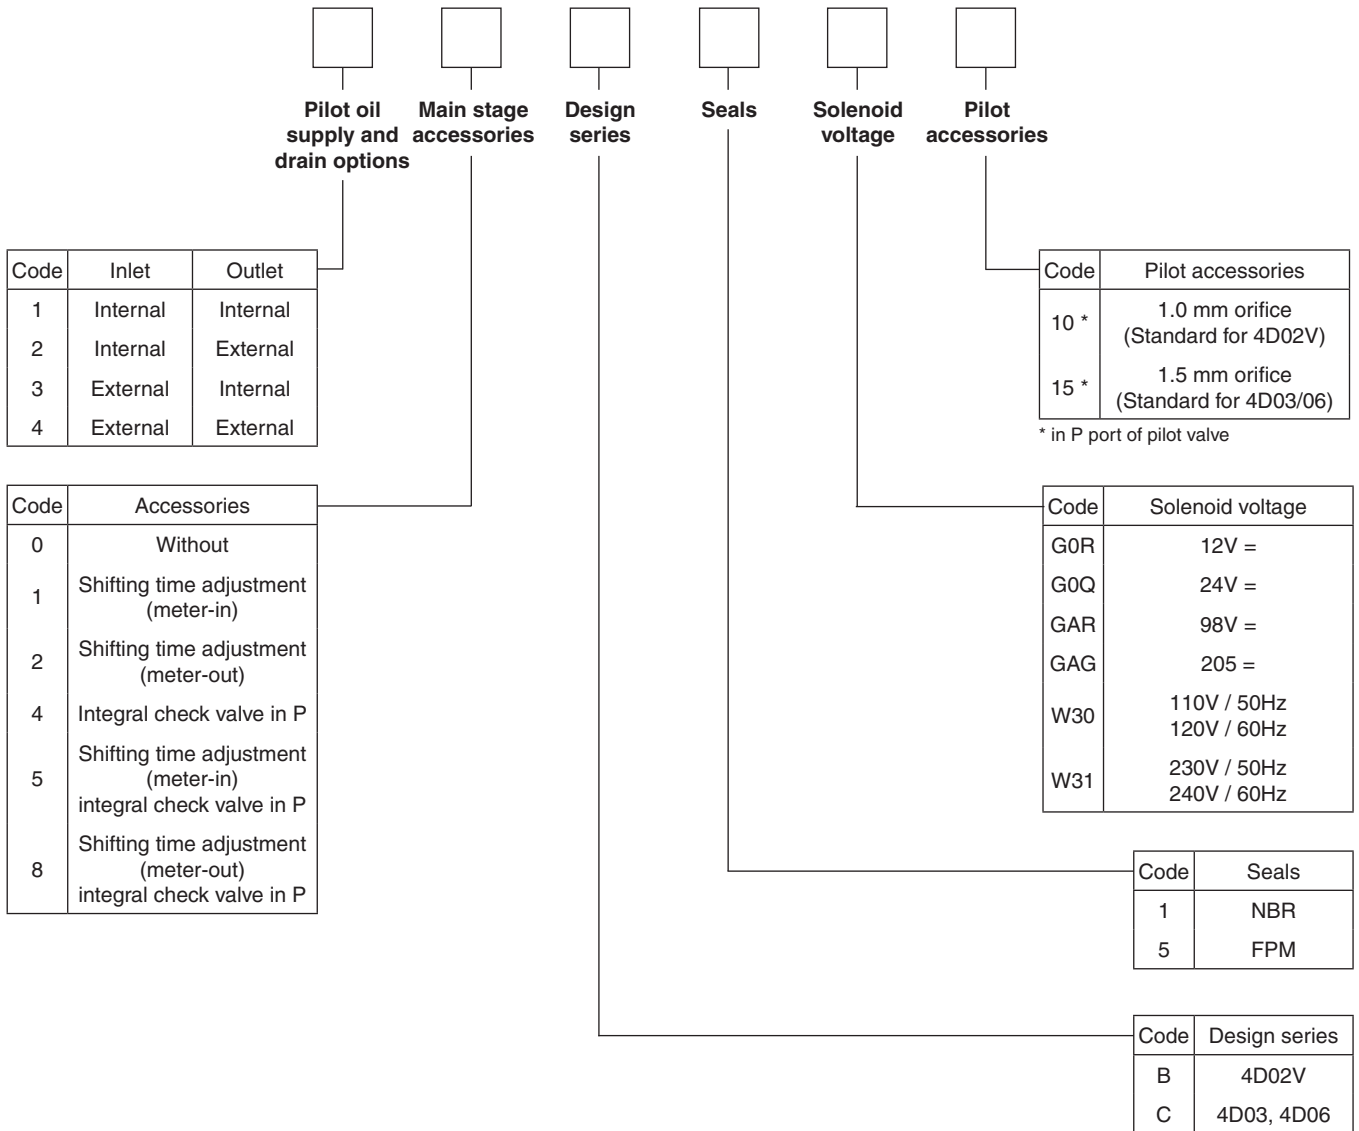

Further spool types, solenoid voltages, position control, hydraulic and mechanical operation on request.

With inductive position control

2

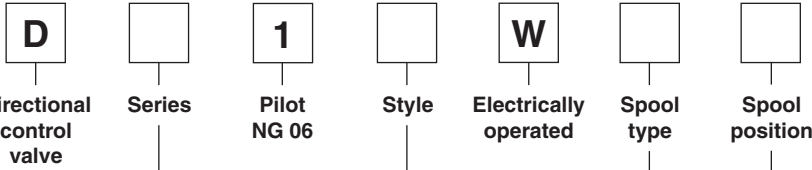

Code	Bore	Size
3	Ø11mm	NG10
4	Ø20mm	NG16
8	Ø26mm	NG25
9	Ø32mm	NG25
11	Ø50mm	NG32

Code	Style
D	D3
V	D4, D8/9, D111


3 position spools	
Code	Spool type
	a 0 b
001 ²⁾	
002 ⁵⁾	
003 ³⁾	
004 ³⁾	
007 ⁵⁾	
009 ¹⁾⁴⁾	
011 ⁵⁾	
014 ⁵⁾	
015 ³⁾	

2 position spools	
Code	Spool type
	a b
020 ²⁾	
030 ⁵⁾	

3 position spools		
Code	all 3 position spools	
C		3 positions. Spring offset in position "0". Operated in position "a" or "b".
	Standard	Spool type 009
E		2 positions. Spring offset in position "0".
F		2 positions. Operated in position "0".
K		2 positions. Spring offset in position "0".
M		2 positions. Operated in position "0".

2 position spools		
Code	Spool position	
B		Spring offset in position "b". Operated in position "a".
H		Spring offset in position "a". Operated in position "b".

¹⁾ Consider specific spool position.
²⁾ All sizes (D31, D41, D81, D91, D111) available
³⁾ Only D31, D41, D81, D91 available
⁴⁾ Only D41, D81, D91, D111 available
⁵⁾ Only D41, D81, D91 available

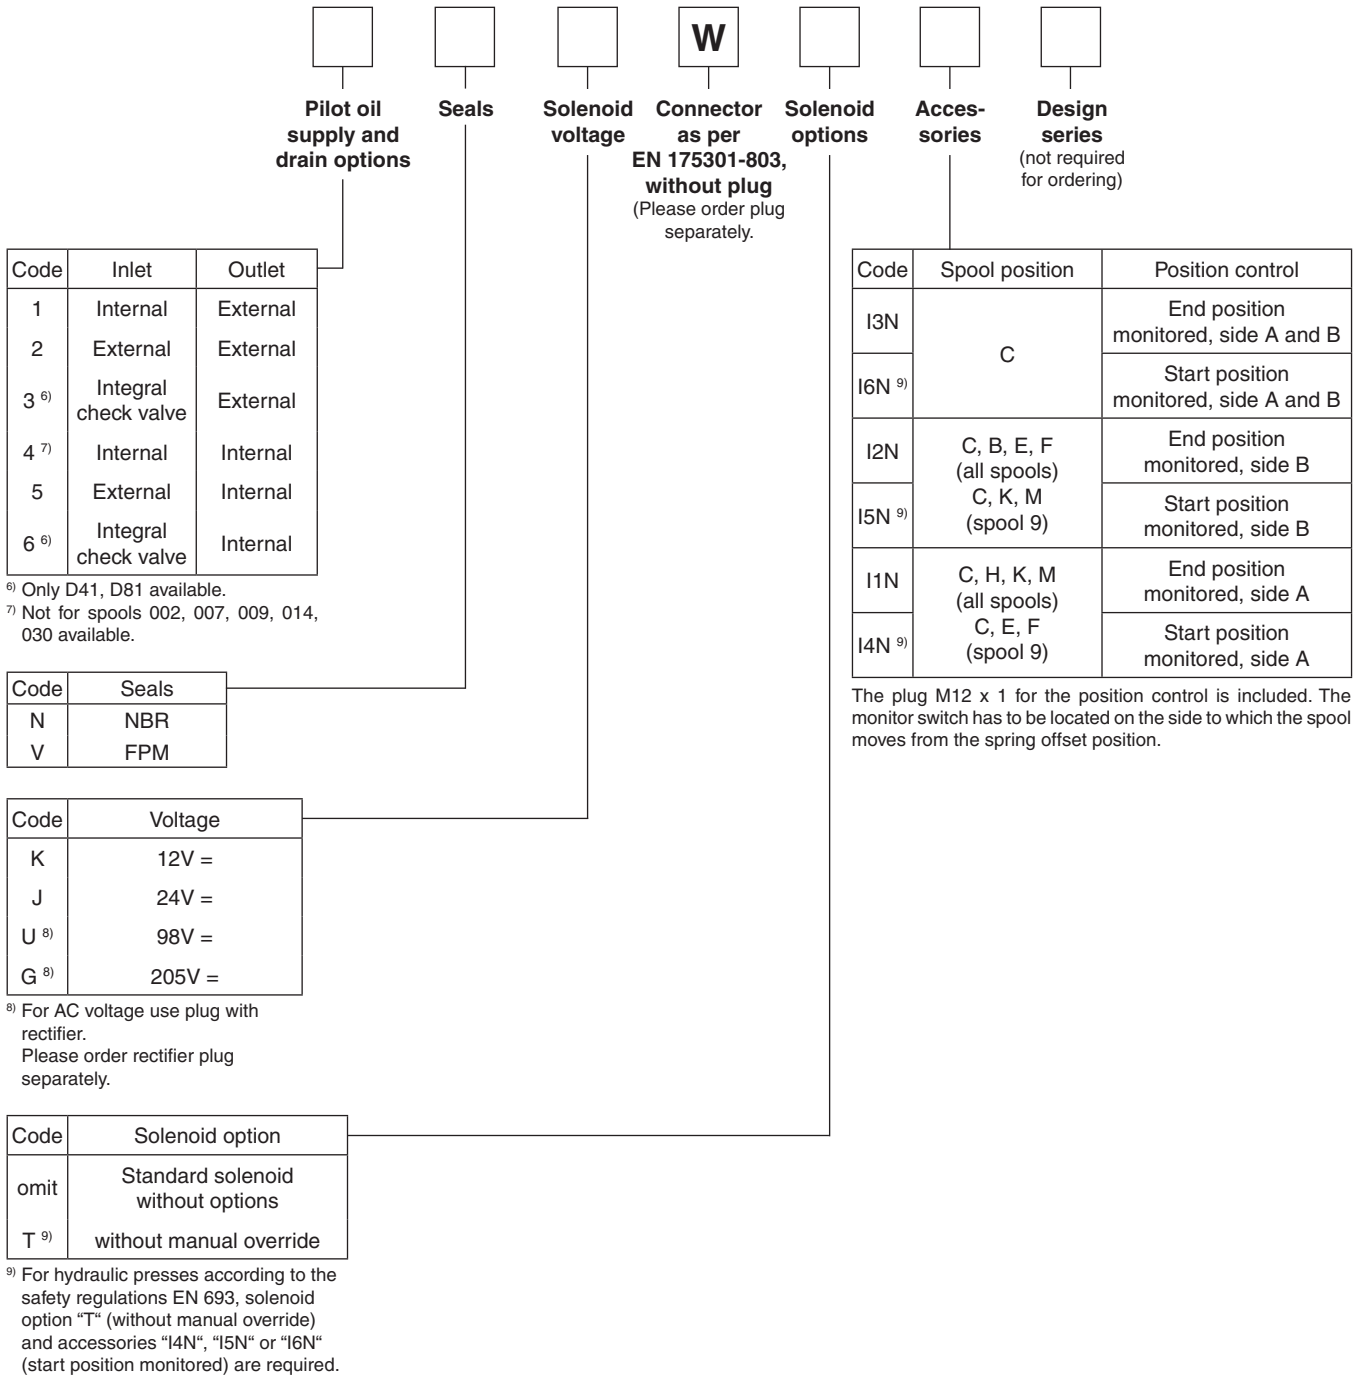

Attention

The adjustment of the position control is factory set and sealed. Replacement and repairs can only be undertaken by the manufacturer.

Technical Data

2


General			Directional spool valve					
Design			Solenoid					
Actuation			Solenoid					
Series	Parker /Denison		D31 / (4D02V)	D41 / 4D03	D81/91 / 4D06	D111 / –		
Size			NG10	NG16	NG25	NG32		
Weight (1/ 2 solenoids)	[kg]		6.0 / 6.6 (7.6 / 8.1)	9.7 / 10.3	17.9 / 18.6	67.4 / 68.0		
Mounting interface			DIN 24340 A10 ISO 4401 NFPA D05	DIN 24340 A16 ISO 4401 NFPA D07	DIN 24340 A25 ISO 4401 NFPA D08	DIN 24340 A32 ISO 4401 NFPA D10		
			CETOP RP 121-H					
Mounting position			unrestricted, preferably horizontal					
Ambient temperature	[°C]		-25...+50 (without inductive position control)					
	[°C]		0...+50 (with inductive position control)					
Hydraulic								
Max. operating pressure	[bar]		Pilot drain internal: P, A B, X: 350; T, Y: 105 (4D02V: P, A, B, X: 315; T, Y: 140) Pilot drain external: P, A B, T, X: 350; Y: 105 (4D02V: P, A, B, T, X: 315; Y:140)					
Fluid			Hydraulic oil in accordance with DIN 51524 / 51525					
Fluid temperature	[°C]		-25 ... +70					
Viscosity permitted	[cSt] / [mm²/s]		2.8...400					
Viscosity recommended	[cSt] / [mm²/s]		30...80					
Filtration			ISO 4406 (1999); 18/16/13 (meet NAS 1638: 7)					
Flow max.	[l/min]		150 / (170)	300	700	2000		
Leakage at 350 bar (per flow path)	[ml/min]		up to 100* / (72...422*)	up to 200*	up to 800*	up to 5000*		
			*depending on spool					
Opening pressure integral check valve	[bar]		n.a.	see p/Q diagram	see p/Q diagram	n.a.		
Minimum pilot supply pressure	[bar]		5 / (7)		5			
Static / Dynamic								
Step response at 95%	[ms]		Energized / De-energized					
DC solenoids	Pilot pressure	50 bar	60 / 40 (50/60)	95 / 65	150 / 170	470 / 390		
		100 bar	55 / 40 (50/60)	75 / 65	110 / 170	320 / 390		
		250 bar	55 / 40 (50/50)	60 / 65	90 / 170	210 / 390		
		350 bar	55 / 40 (50/50)	60 / 65	85 / 170	200 / 390		
AC solenoids	Pilot pressure	50 bar	40 / 30 (30/50)	75 / 55	130 / 155	450 / 375		
		100 bar	35 / 30 (30/50)	65 / 55	90 / 155	300 / 375		
		250 bar	35 / 30 (30/50)	40 / 55	70 / 155	190 / 375		
		350 bar	35 / 30 (30/50)	40 / 55	65 / 155	180 / 375		
Electrical characteristics								
Duty ratio			100% ED; CAUTION: coil temperature up to 150 °C possible					
Protection class			IP 65 in accordance with EN 60529 (plugged and mounted)					
		Code	K	J	U	G	Y	T
Supply voltage / ripple	[V]		12 V =	24 V =	98 V =	205 V =	110V at 50Hz/ 120V at 60Hz	230V at 50Hz/ 240V at 60Hz
Tolerance supply voltage	[%]		±10	±10	±10	±10	±5	±5
Current consumption	hold	[A]	2.5	1.25	0.31	0.15	0.58 / 0.49	0.31 / 0.26
Current consumption	in rush	[A]	2.5	1.25	0.31	0.15	2.1 / 2.0	1.05 / 1.0
Power consumption	hold	[W]	30	30	30	30	64 / 59 VA	68 / 62 VA
Power consumption	in rush	[W]	30	30	30	30	231 / 240 VA	231 / 240 VA
Solenoid connection			Connector as per EN 175301-803, solenoid identification as per ISO 9461.					
Wiring min.	[mm²]		3 x 1.5 recommended					
Wiring length max.	[m]		50 recommended					

With electrical connections the protective conductor (PE ⊥) must be connected according to the relevant regulations.

Electrical characteristics of position control M12x1

Protection class		IP 65 in accordance with EN 60529 (plugged and mounted)
Ambient temperature	[°C]	0...+50
Supply voltage / ripple	[V]	18...42 / 10%
Current consumption without load	[mA]	≤ 30
Max. output current per channel, ohmic	[mA]	400
Min. output load per channel, ohmic	[kOhm]	100
Max. output drop at 0.2A	[V]	≤ 1.1
Max. output drop at 0.4A	[V]	≤ 1.6
EMC		EN50081-1 / EN50082-2
Max. tolerance ambient field strength	[A/m]	<1200
Min. distance to next AC solenoid	[m]	>0.1
Interface		M12x1 nach IEC 61076-2-101
Wiring min.	[mm²]	5 x 0.25 brad shield recommended
Wiring length max.	[m]	50 recommended

M12 pin assignment




Start position monitored

- 1 + Supply 18...42V
- 2 Normally open B
- 3 0V
- 4 Normally open A
- 5 Earth ground

End position monitored

- 1 + Supply 18...42V
- 2 Normally closed B
- 3 0V
- 4 Normally open A
- 5 Earth ground

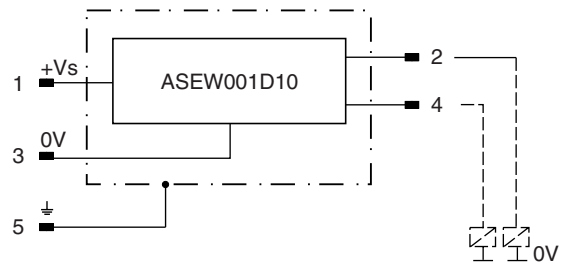

Definitions

Start position monitored:

The valve is de-energized. The inductive switch gives a signal at the moment (below 15% spool stroke) when the spool leaves the spring offset position.

End position monitored:



The inductive switch gives a signal before the end position is reached. (above 85% spool stroke).

The flow curve diagram shows the flow versus pressure drop curves for all spool types. The relevant curve number

for each spool type, operating position and flow direction is given in the table below.


D31DW and D41VW / 4D03

Spool Code	Curve number									
	P-A		P-B		P-T		A-T		B-T	
	D3	D4	D3	D4	D3	D4	D3	D4	D3	D4
001	3	1	3	1	-	-	1	4	1	5
002	3	1	3	2	4	6	1	4	1	6
003	3	1	4	2	-	-	1	5	1	6
004	3	1	3	1	-	-	1	5	1	5
005	3	2	4	2	-	-	1	3	1	5
006	3	1	3	2	-	-	1	3	1	6
007	4	1	3	1	-	6	1	4	1	5
009	3	2	3	9	8	8	1	7	1	10
011	3	1	3	1	-	-	1	4	1	5
014	3	1	4	1	-	6	1	4	1	5
015	4	1	3	2	-	-	1	4	1	6
016	4	2	3	2	-	-	1	3	1	5
020	3	3	4	5	-	-	1	3	1	5
021	4	2	3	8	-	-	1	2	-	-
022	3	8	4	2	-	-	-	-	1	3
026	3	3	3	5	-	-	-	-	-	-
030	3	2	1	3	-	-	1	6	1	7
054	-	2	-	3	-	-	-	6	-	7

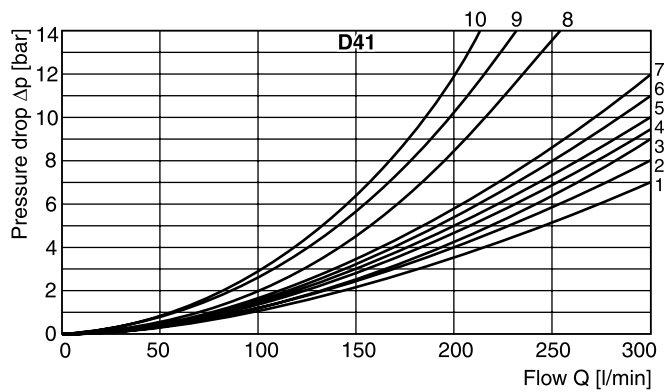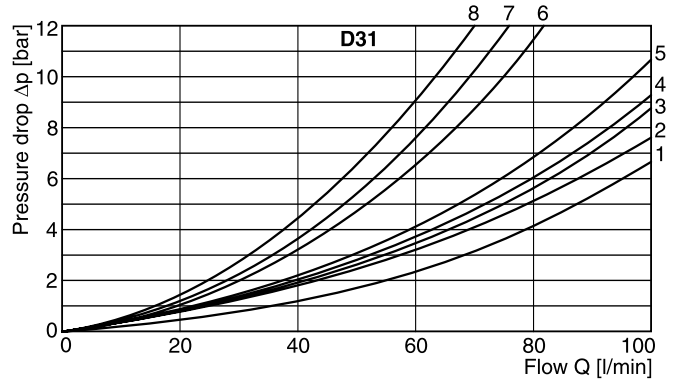



4D02V

Spool Code	Curve number				
	P-A	P-B	P-T	A-T	B-T
01	3	3	7	4	3
02	3	3	-	2	4
03	3	3	-	2	5
07	4	6	6	4	10
08	2	3	-	4	4
09	2	2	-	1	4
10	2	3	-	4	4
11	5	3	-	2	5
13	2	4	-	1	4
14	4	3	-	2	4
46	8	9	-	7	9
51	6	4	-	3	6
55	-	7	-	8	-
56	4	-	-	9	-

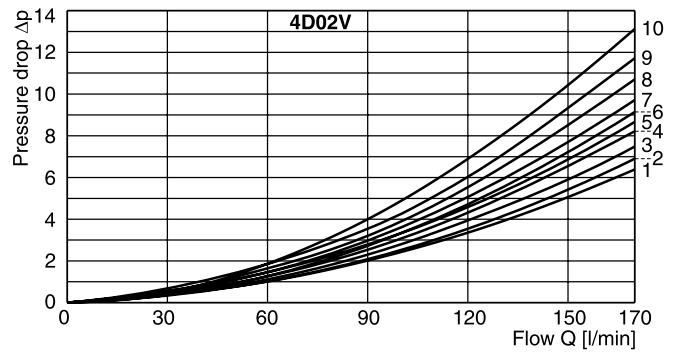

D81/D91VW / 4D06 and D111VW

Spool Code	Curve number									
	P-A		P-B		P-T		A-T		B-T	
	D8/9	D11	D8/9	D11	D8/9	D11	D8/9	D11	D8/9	D11
001	3	5	2	5	-	-	3	4	5	1
002	2	5	1	5	1	5	3	4	5	1
003	4	-	2	-	-	-	3	-	6	-
004	4	-	3	-	-	-	3	-	5	-
005	1	-	2	-	-	-	4	-	5	-
006	2	-	2	-	-	-	4	-	6	-
007	3	-	1	-	7	-	3	-	5	-
009	4	3	8	3	9	2	4	3	10	1
011	3	-	2	-	-	-	3	-	5	-
014	1	-	2	-	8	-	3	-	5	-
015	3	-	3	-	-	-	4	-	5	-
016	3	-	3	-	-	-	4	-	5	-
020	6	5	5	5	-	-	6	3	8	1
021	5	-	10	-	-	-	3	-	-	-
022	10	-	5	-	-	-	-	-	5	-
026	6	-	5	-	-	-	-	-	-	-
030	3	5	2	5	-	-	3	4	5	1
054	4	5	3	5	-	-	3	4	5	1

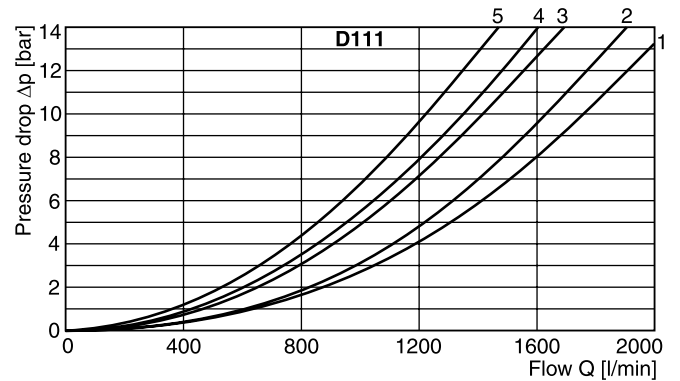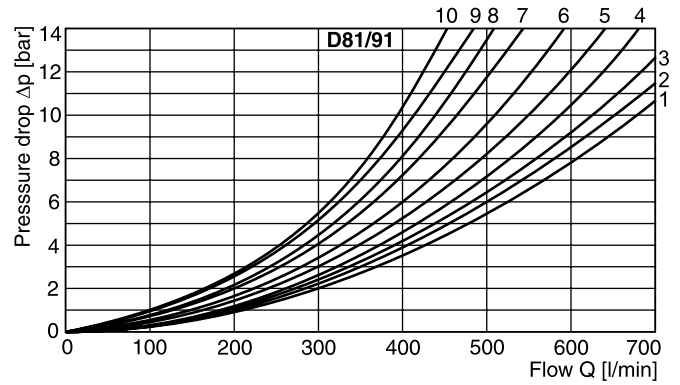


Integral check valve in the P port


Mounting an integral check valve in the P port is necessary to build up pilot pressure for valves with P to T connection and internal pilot oil supply. The pressure

difference at the integral check valve (see performance curves) is to be added to all flow curves of the P-port of the main valve. Directional valves with an integral check valve are available for the series 4D02V, D41/4D03 and D81/4D06.


Flow curve 4D02V

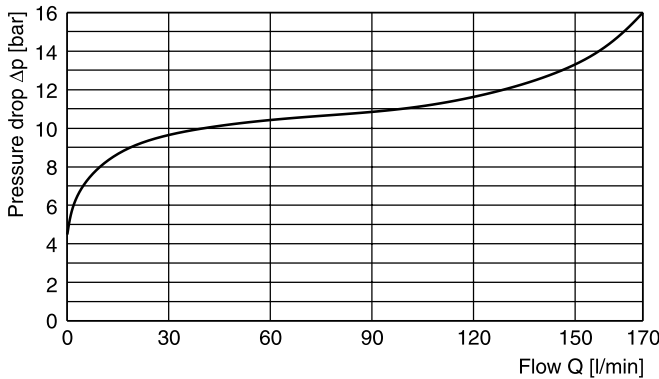

Flow curve D41VW / 4D03

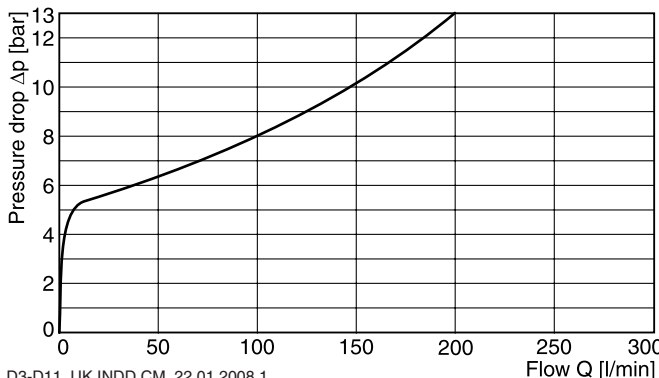


Flow curve D81VW / 4D06

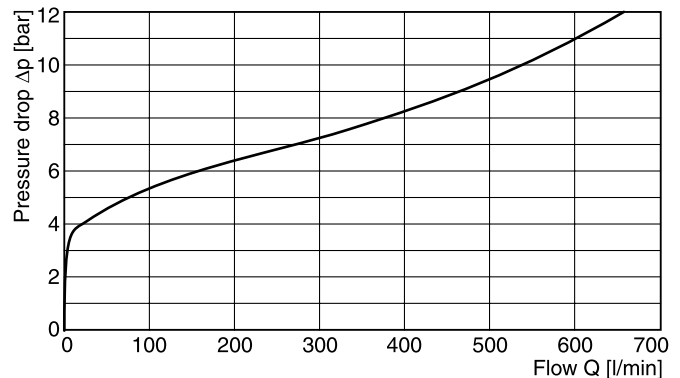

D3-D11_UK.INDD CM_22.01.2008.1


Pilot oil inlet (supply) and outlet (drain)

Series D31DW

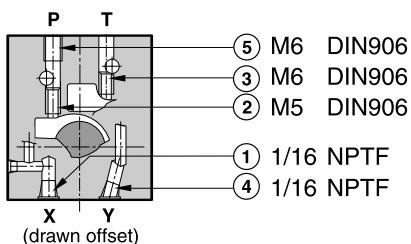


○ open, ● closed

Pilot oil		1	2	3	4	5
Inlet	Outlet					
internal	external	●	○	●	○	Orifice Ø1.2
external	external	○	●	●	○	Orifice Ø1.2
internal	internal	●	○	○	●	Orifice Ø1.2
external	internal	○	●	○	●	Orifice Ø1.2




Series 4D02V

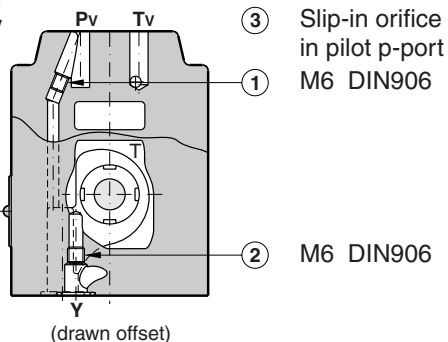


○ open, ● closed

Pilot oil		1	2	3
Inlet	Outlet			
internal	external	○	●	Orifice Ø1.0
external	external	●	●	Orifice Ø1.0
internal	internal	○	○	Orifice Ø1.0
external	internal	●	○	Orifice Ø1.0




Series D41VW

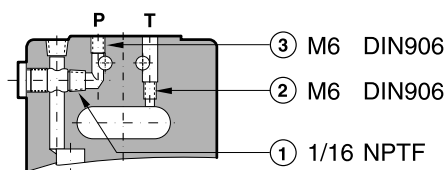


○ open, ● closed

Pilot oil		1	2	3
Inlet	Outlet			
internal	external	○	●	Orifice Ø1.5
external	external	●	●	Orifice Ø1.5
internal	internal	○	○	Orifice Ø1.5
external	internal	●	○	Orifice Ø1.5




Series D81/91VW

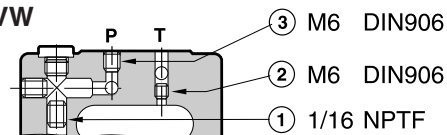


○ open, ● closed

Pilot oil		1	2	3
Inlet	Outlet			
internal	external	○	●	Orifice Ø1.5
external	external	●	●	Orifice Ø1.5
internal	internal	○	○	Orifice Ø1.5
external	internal	●	○	Orifice Ø1.5




Series D111VW

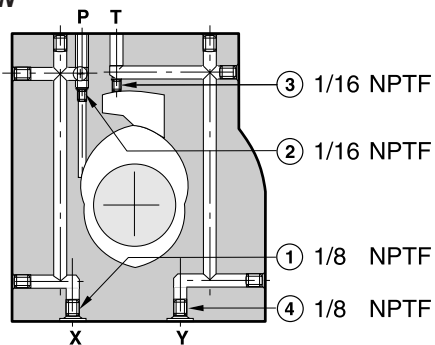


○ open, ● closed

Pilot oil		1	2	3	4
Inlet	Outlet				
internal	external	●	Orifice Ø1.5	●	○
external	external	Orifice Ø1.5	●	●	○
internal	internal	●	Orifice Ø1.5	○	●
external	internal	Orifice Ø1.5	●	○	●



All orifice sizes for standard valves


D31DW

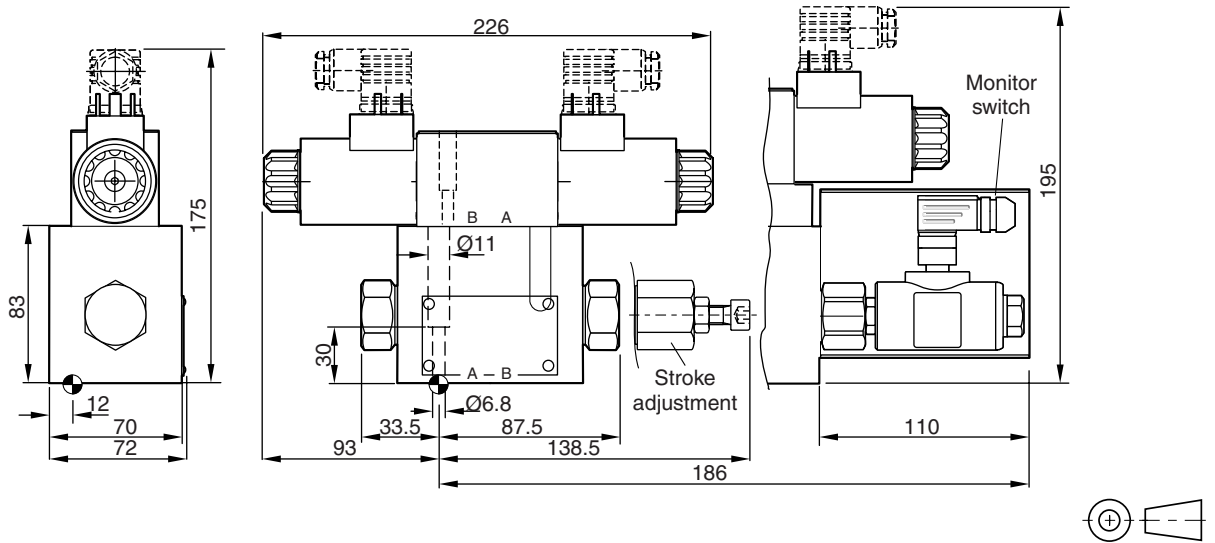

2

Surface finish	Kit	Kit	Kit	Kit
$\sqrt{R_{max} 6.3}$ $\square 0.01/100$	BK385	4x M6x40 DIN 912 12.9	13.2 Nm ±15%	NBR: SK-D31DW-N-91 FPM: SK-D31DW-V-91

4D02V


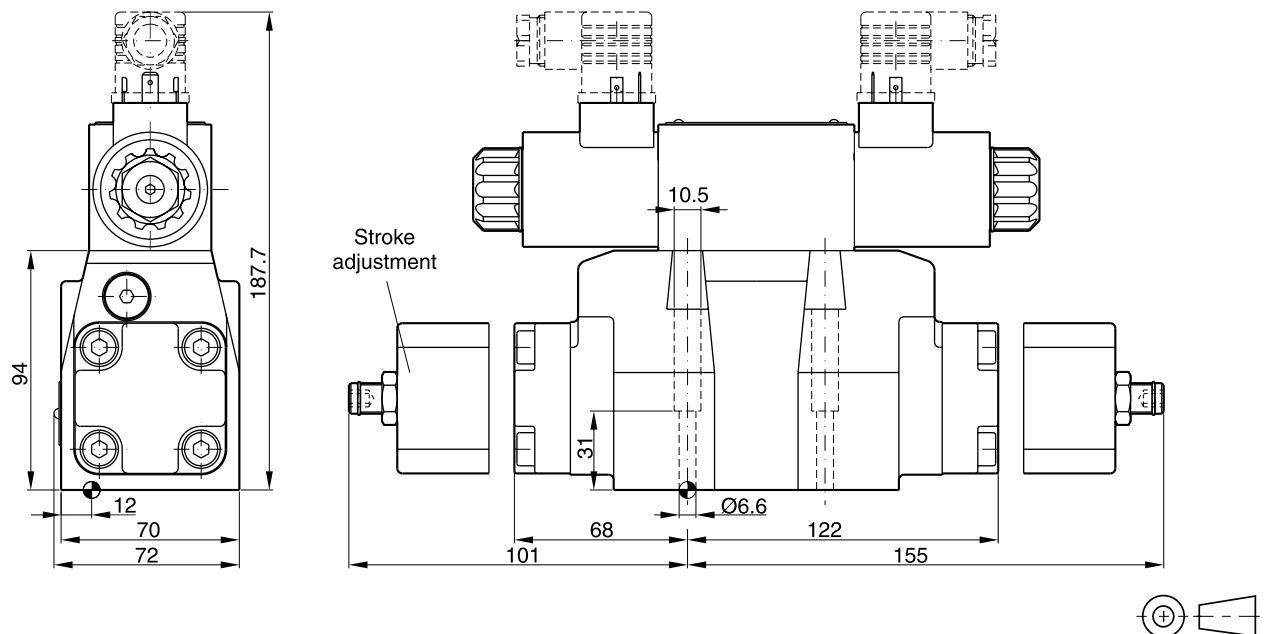


Surface finish	Kit	Kit	Kit	Kit
$\sqrt{R_{max} 6.3}$ $\square 0.01/100$	BK385	4x M6x40 DIN 912 12.9	13.2 Nm	NBR: SK-4D02V-B1 FPM: SK-4D02V-B5

The space necessary to remove the plug per EN 175301-803, design type AF is at least 15 mm.
 The torque for the screw M3 of the plug has to be 0.5 to 0.6 Nm.



D3-D11_UK.INDD CM_22.01.2008.1

D41VW/4D03

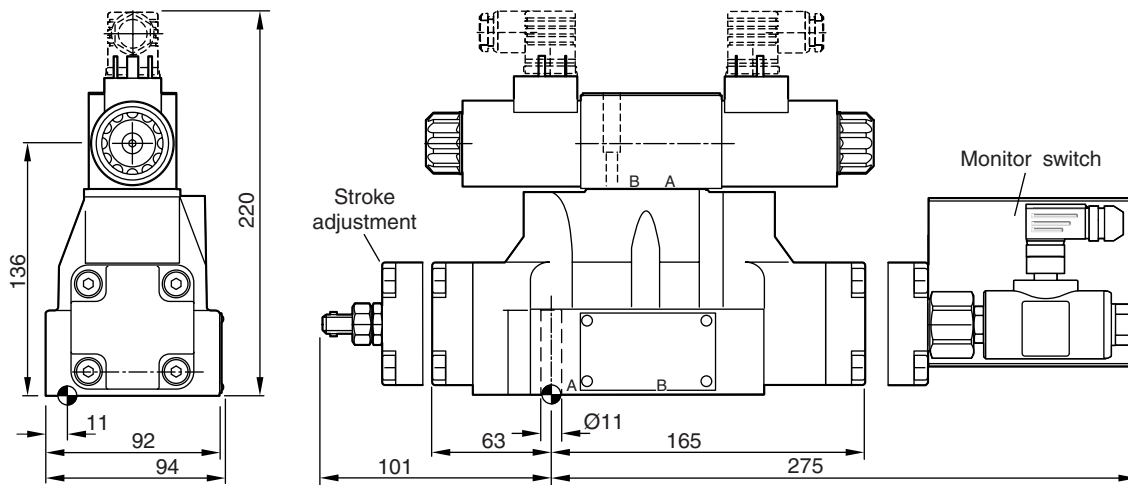

Surface finish	Kit	Kit	Kit	Kit
$\sqrt{R_{max} 6.3}$ $\square 0.01/100$	BK320	4x M10x60 2x M6x55 DIN 912 12.9	63 Nm $\pm 15\%$ 13.2 Nm $\pm 15\%$	NBR: SK-D41DW-N-91 FPM: SK-D41DW-V-91


D81VW/4D06, D91VW

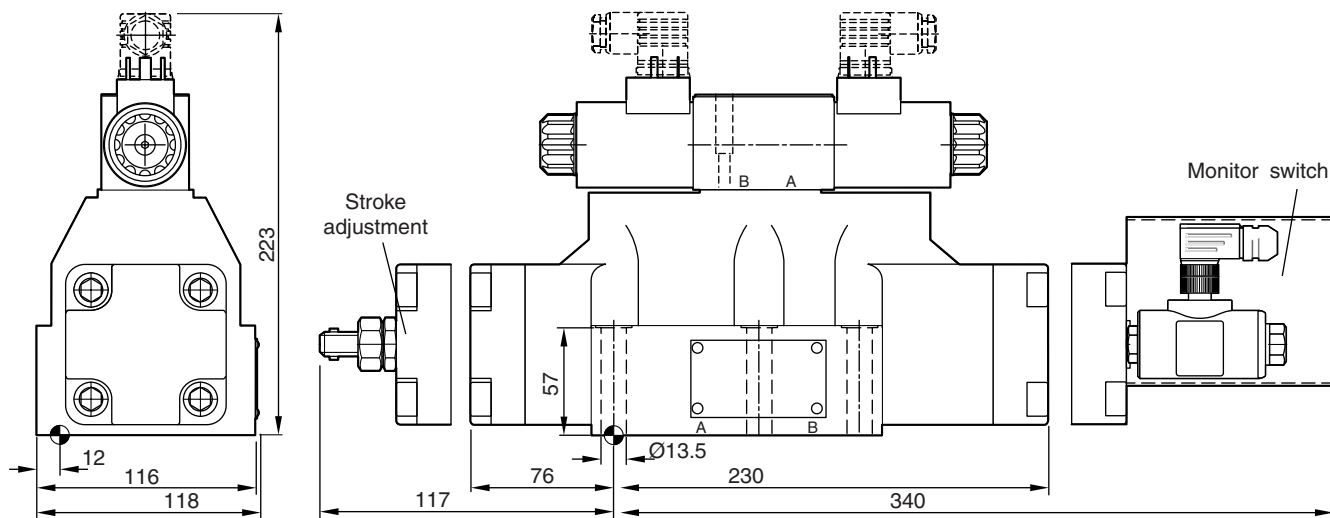

Surface finish	Kit	Kit	Kit	Kit
$\sqrt{R_{max} 6.3}$ $\square 0.01/100$	BK360	6x M12x75 DIN 912 12.9	108 Nm $\pm 15\%$	NBR: SK-D81VW-N-91 / SK-D91VW-N-91 FPM: SK-D81VW-V-91 / SK-D91VW-V-91

The space necessary to remove the plug per EN 175301-803, design type AF is at least 15 mm.
 The torque for the screw M3 of the plug has to be 0.5 to 0.6 Nm.


D111VW

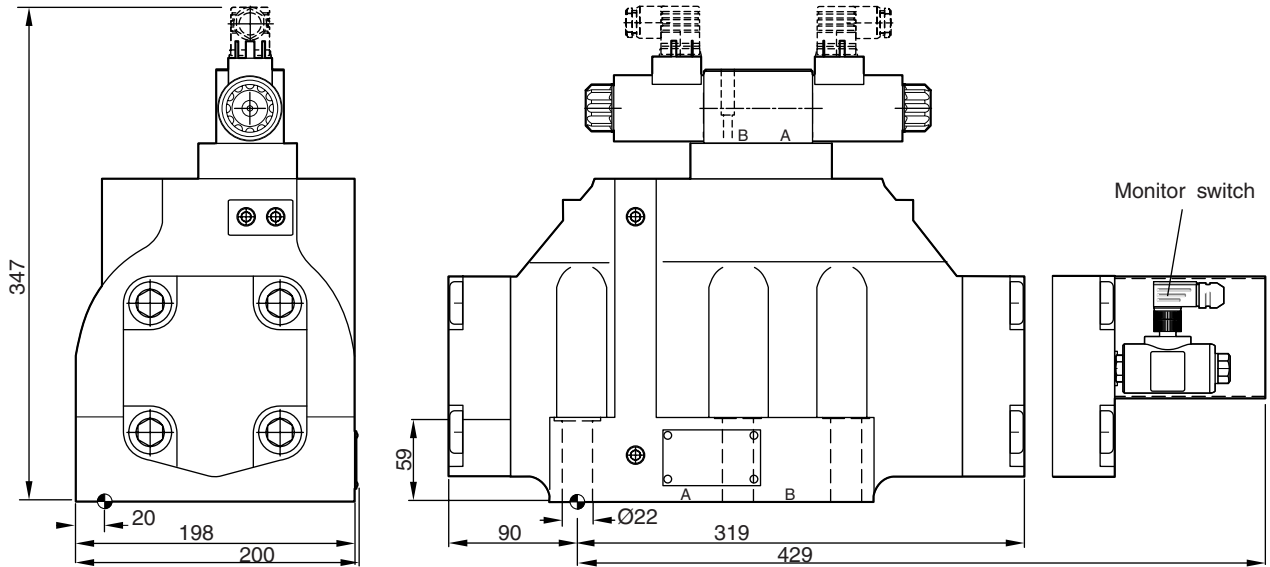

2

Surface finish	Kit	Kit	Kit	Kit
	BK386	6x M20x90 DIN 912 12.9	517 Nm ±15%	NBR: SK-D111VW-N-91 FPM: SK-D111VW-V-91


The space necessary to remove the plug as per EN 175301-803, design type AF is at least 15 mm.
 The torque for the screw M3 of the plug has to be 0.5 to 0.6 Nm.




The D1VP is a hydraulically controlled 4/3 or 4/2 way directional control valve. The valve can be operated either by the pilot ports X and Y via the subplate or by the connection of an external pilot pipe directly on the valve body.

The D3DP, D4P, D9P and D11P are hydraulically controlled 4/3 or 4/2 way directional control valves. The valves are operated by the pilot ports X and Y via the subplate. Pressure and flow of the pilot oil have a significant influence on the response time of the spool.

The minimum pilot pressure must be ensured for all operating conditions of the directional valve.



2

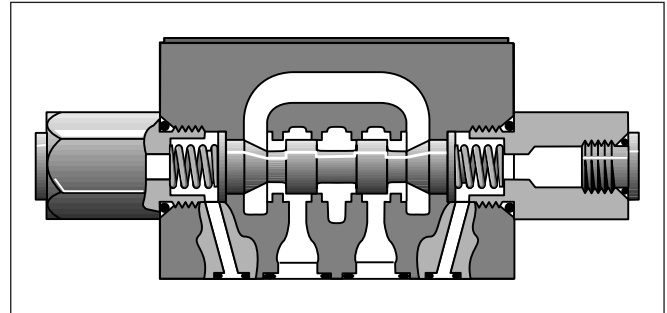


Technical data

General	Directional spool valve				
Design	Hydraulic				
Actuation	Hydraulic				
Series	D1VP	D3DP	D4P	D9P	D11P
Size	NG06	NG10	NG16	NG25	NG32
Weight	[kg] 1.3	3.7	9.0	17.0	66.0
Mounting interface	DIN 24340 A06 ISO 4401 NFPA D03	DIN 24340 A10 ISO 4401 NFPA D05	DIN 24340 A16 ISO 4401 NFPA D07	DIN 24340 A25 ISO 4401 NFPA D08	DIN 24340 A32 ISO 4401 NFPA D10
	CETOP RP 121-H				
Mounting position	unrestricted, preferably horizontal				
Ambient temperature	[°C] -25...+50				
Hydraulic					
Max. operating pressure	[bar] P, A B, T: 350; X, Y: 210	P, A B, T: 350; X, Y: 210	P, A B, T: 350; X, Y: 350 ¹⁾	P, A B, T: 350; X, Y: 350 ¹⁾	P, A B, T: 350; X, Y: 350 ¹⁾
Fluid	Hydraulic oil in accordance with DIN 51524 / 51525				
Fluid temperature	[°C] -25 ... +70				
Viscosity permitted	[cSt] / [mm ² /s] 2.8...400				
Viscosity recommended	[cSt] / [mm ² /s] 30...80				
Filtration	ISO 4406 (1999); 18/16/13 (meet NAS 1638: 7)				
Flow max.	[l/min] 80	130	300	700	2000
Leakage at 350 bar (per flow path) * depending on spool	[ml/min] up to 60*	up to 100*	up to 200*	up to 800*	up to 5000*
Pilot supply pressure (min/max)	[bar] 15 / 210	15 / 210	5 / 350 ¹⁾	5 / 350 ¹⁾	5 / 350 ¹⁾
Static / Dynamic					
Step response	The response times depend on the pilot oil pressure and on the speed of the increase / decrease of the pilot pressure.				
Recommended values are (act./deact.)	[ms] 13 / 28	20 / 30	50 / 60	100 / 150	300 / 370

¹⁾ with monitor switch: 105 bar

Ordering Code

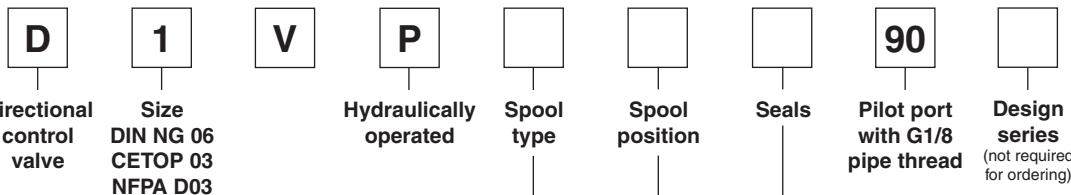

2

3 position spools	
Code	Spool type
1	
2	
3	
4	
5	
6	
7	
8*	
9*	
10	
11	
14	
15	
16	
21	
22	
31	
32	
76	
78	
81	
82	
102	

2 position spools	
Code	Spool type
20	
26	
30	
101	

* Consider specific spool position.


Code	Seals
N	NBR
V	FPM

3 position spools		
Code	all 3 position spools	
C		3 positions. Spring offset in position "0". Operated in position "a" or "b".
	Standard	Spool type 8 and 9
E		2 positions. Spring offset in position "0".
F		2 positions. Operated in position "0".
K		2 positions. Spring offset in position "0".
M		2 positions. Operated in position "0".

2 position spools		
Code	Spool position	
B		Spring offset in position "b". Operated in position "a".
D		Detent, operated in position "a" or "b". No centre or offset position.
H		Spring offset in position "a". Operated in position "b".

Bold letters =
Short-term availability

Further spool types and styles on request.

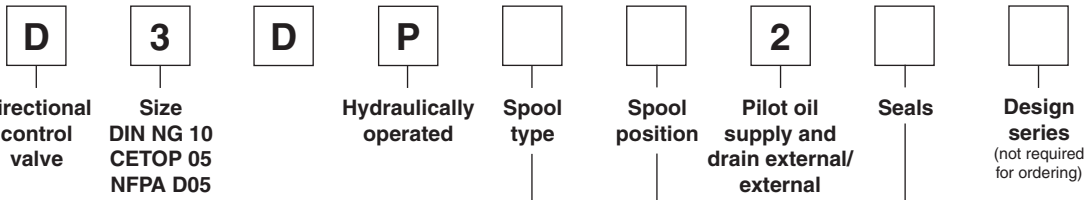

2

3 position spools	
Code	Spool type
1	
2	
3	
4	
5	
6	
7	
8 *	
9 *	
10	
11	
14	
15	
16	
21	
22	
31	
32	
76	
78	
81	
82	
102	

2 position spools	
Code	Spool type
20	
26	
30	
101	

* Consider specific spool position.

Code	Seals
N	NBR
V	FPM

3 position spools		
Code	all 3 position spools	
C		3 positions. Spring offset in position "0". Operated in position "a" or "b".
	Standard	Spool type 8 and 9
E		2 positions. Spring offset in position "0". Operated in position "a".
		Operated in position "b".
F		2 positions. Spring offset in position "0". Operated in position "b".
		Spring offset in position "a".
K		2 positions. Operated in position "b".
		Operated in position "a".
M		2 positions. Spring offset in position "0". Operated in position "a".
		Spring offset in position "b".

2 position spools		
Code	Spool position	
B		Spring offset in position "b". Operated in position "a".
D		Detent, operated in position "a" or "b". No centre or offset position.
H		Spring offset in position "a". Operated in position "b".

Further spool types and styles on request.



2

Code	Bore	Size
4	Ø20mm	NG16
9	Ø32mm	NG25
11	Ø50mm	NG32

3 position spools	
Code	Spool type
	a 0 b
1 ²⁾	
2 ²⁾	
3 ³⁾	
4 ³⁾	
5 ³⁾	
6 ³⁾	
7 ³⁾	
9 ¹⁾²⁾	
11 ³⁾	
14 ³⁾	
15 ³⁾	
16 ³⁾	
21 ³⁾	
22 ³⁾	
31 ⁴⁾	
32 ⁴⁾	
54 ²⁾	
81 ²⁾	
82 ²⁾	

2 position spools	
Code	Spool type
	a b
20 ²⁾	
26 ³⁾	
30 ²⁾	

¹⁾ Consider specific spool position
²⁾ All sizes (D4, D9, D11) available
³⁾ Only D4 and D9 available
⁴⁾ Only D9 available

3 position spools		
Code	all 3 position spools	
C ²⁾		3 positions. Spring offset in position "0". Operated in position "a" or "b".
	Standard	Spool type 9
E ²⁾	 Operated in position "a".	 Operated in position "b". 2 positions. Spring offset in position "0".
F ²⁾	 Spring offset in position "b".	 Spring offset in position "a". 2 positions. Operated in position "0".
K ²⁾	 Operated in position "b".	 Operated in position "a". 2 positions. Spring offset in position "0".
M ²⁾	 Spring offset in position "a".	 Spring offset in position "b". 2 positions. Operated in position "0".
R ³⁾	 No centre in offset position.	 No centre in offset position. 2 positions, detent. Operated in position "0" or "b".
S ³⁾	 No centre in offset position.	 No centre in offset position. 2 positions, detent. Operated in position "0" or "a". No centre in offset position.

2 position spools		
Code	Spool position	
B		Spring offset in position "b". Operated in position "a".
D ³⁾		Detent, operated in position "a" or "b". No centre or offset position.
H		Spring offset in position "a". Operated in position "b".

Further spool types and position control on request.

2

Pilot oil supply and drain external/external

Seals

Accessories

Design series

Code	Seals
N	NBR
V	FPM

Code	Accessories
omit ²⁾	Standard valve w/o accessories
7 ²⁾	Pilot choke, meter-out
8 ³⁾	Stroke adjustment side B
9 ³⁾	Stroke adjustment side A
60 ²⁾	Pilot choke, meter-in
89 ³⁾	Stroke adjustment side A and B


2

The flow curve diagram shows the flow versus pressure drop for each spool type, operating position and flow direction curves for all spool types. The relevant curve number is given in the table below.

Spool	Position „b“		Position „a“		Position „0“					
	P->A	B->T	P->B	A->T	P->A	P->B	A->T	B->T	P->T	A->B
1	4	1	4	1	-	-	-	-	-	-
2	5	2	5	2	4	4	1	1	6	1
3	4	1	4	2	-	-	8	-	-	-
4	4	2	4	2	-	-	7	7	-	9
5	4	1	5	1	9	-	-	-	-	-
6	5	1	5	1	9	9	-	-	-	9
7	5	2	4	1	-	5	-	1	7	-
10	4	-	4	-	-	-	-	-	-	-
11	4	2	4	2	-	-	11	11	-	-
14	4	1	5	2	5	-	1	-	7	-
15	4	2	4	1	-	-	-	8	-	-
16	5	1	4	1	-	9	-	-	-	-
20	5	1	5	1	-	-	-	-	-	-
26	6	-	6	-	-	-	-	-	-	-
30	5	1	5	1	-	-	-	-	-	-
76	-	2	-	-	-	-	3	-	-	-
78	-	-	-	2	-	-	-	3	-	-
81	10	10	10	10	-	-	-	-	-	-
82	10	10	10	10	-	-	*	*	-	-
	P->B	A->T	P->A	B->T	P->A	P->B	A->T	B->T	P->T	A->B
8	2	2	2	2	-	-	-	-	8	-
9	3	3	3	3	-	-	-	-	9	-
	Position „b“		Position „a“							
	P->A	P->B	A->B	P->B	A->T					
21	3	3	3	6	1					
	P->A	B->T		P->A	P->B	A->B				
22	6	1		3	3	3				

* Only for pressure compensation, no high flow possible.

Flow curve

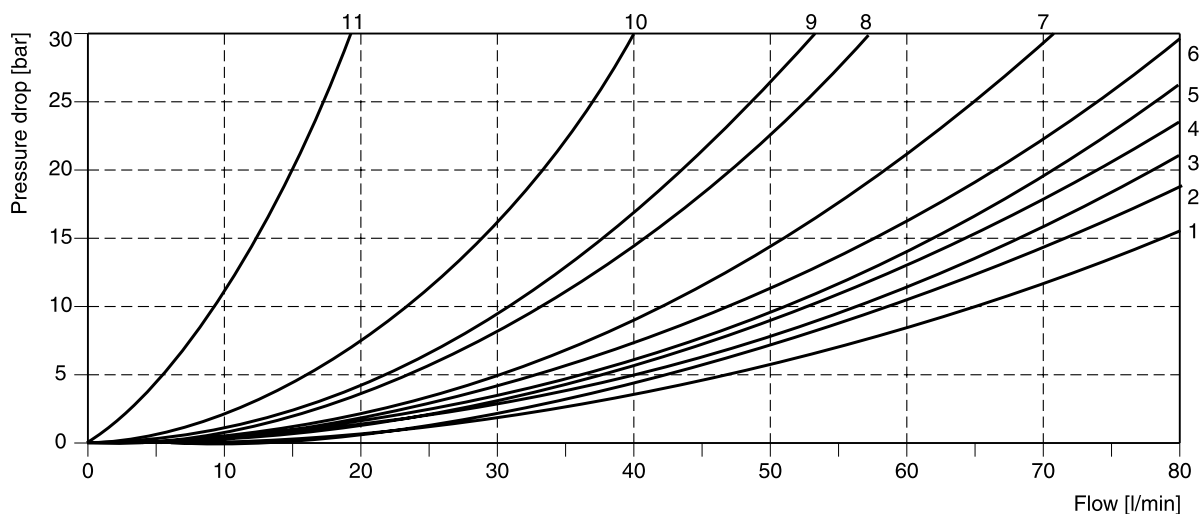


The flow curve diagram shows the flow versus pressure drop curves for all spool types. The relevant curve number is given in the table below.

Spool	Position „b“		Position „a“		Position „0“					
	P->A	B->T	P->B	A->T	P->A	P->B	A->T	B->T	P->T	A->B
1	4	3	4	3	—	—	—	—	—	—
2	4	1	4	1	3	3	1	1	5	1
3	4	3	5	2	—	—	4	—	—	—
4	4	2	4	2	—	—	3	3	—	5
5	4	3	5	3	5	—	—	—	—	—
6	4	3	4	3	6	6	—	—	—	6
7	5	1	4	3	—	4	—	2	6	—
10	4	—	4	—	—	—	—	—	—	—
11	4	3	4	3	—	—	8	8	—	—
12	4	3	4	3	7	7	7	7	8	8
14	4	3	5	1	4	—	2	—	6	—
15	5	2	4	3	—	—	—	4	—	—
16	5	3	4	3	—	5	—	—	—	—
20	4	3	4	3	—	—	—	—	—	—
26	4	—	4	—	—	—	—	—	—	—
30	4	2	4	2	—	—	—	—	—	—
	P->B	A->T	P->A	B->T	P->A	P->B	A->T	B->T	P->T	A->B
8	4	3	4	3	—	—	—	—	6	—
9	4	4	4	4	—	—	—	—	6	—
	Position „b“		Position „a“							
	P->A	P->B	A->B	P->B	A->T					
21	5	4	6	3	3					
	P->A	B->T		P->A	P->B	A->B				
22	3	3		4	5	6				

2

Flow curve


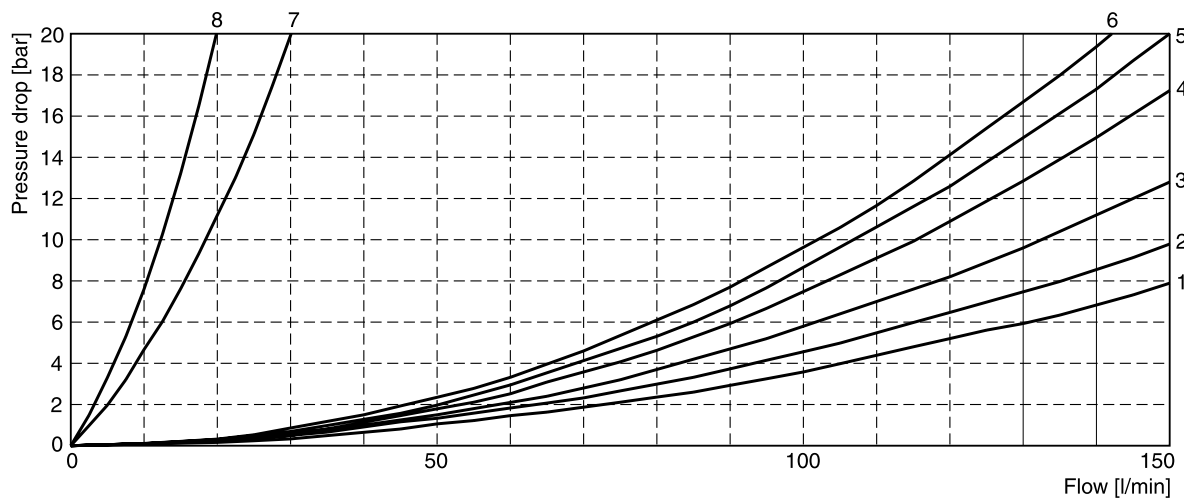


The flow curve diagram shows the flow versus pressure drop curves for all spool types. The relevant curve number

for each spool type, operating position and flow direction is given in the table below.


D4P

Spool Code	Curve number				
	P-A	P-B	P-T	A-T	B-T
1	1	1	-	4	5
2	1	2	6	4	6
3	1	2	-	5	6
4	1	1	-	5	5
5	2	2	-	3	5
6	1	2	-	3	6
7	1	1	6	4	5
9	2	9	8	7	10
11	1	1	-	4	5
14	1	1	6	4	5
15	1	2	-	4	6
16	2	2	-	3	5
20	3	5	-	3	5
21	2	8	-	2	-
22	8	2	-	-	3
26	3	5	-	-	-
30	2	3	-	6	7
54	2	3	-	6	7

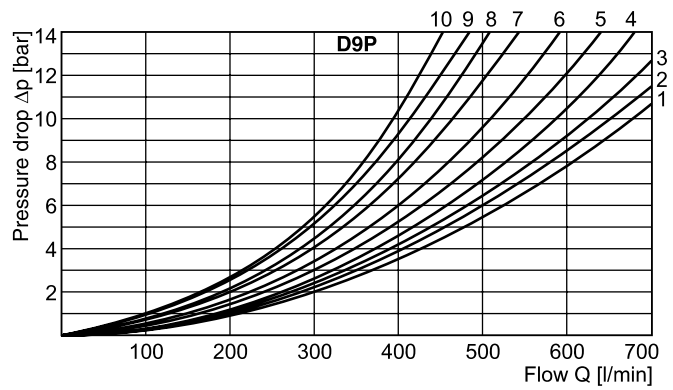
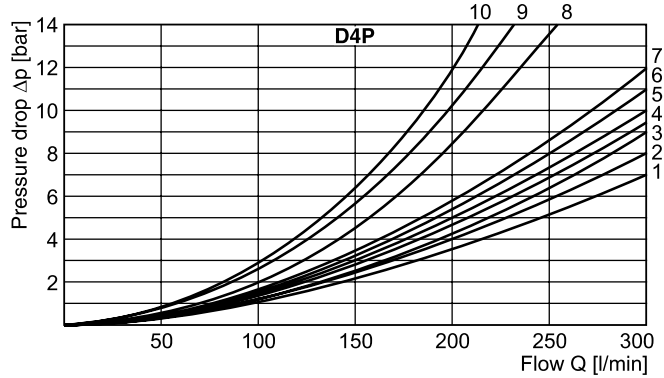


D9P and D11P



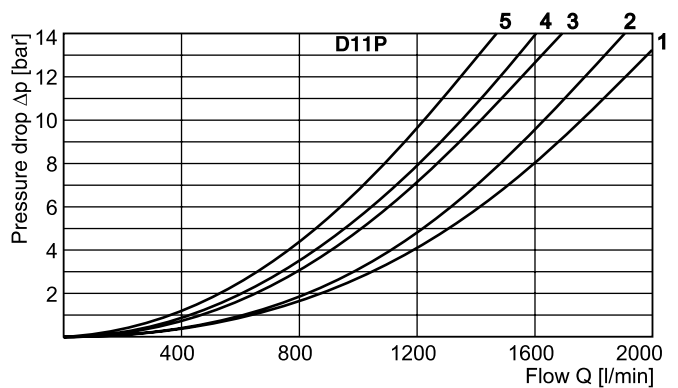


Spool Code	Curve number									
	P-A		P-B		P-T		A-T		B-T	
	D9	D11	D9	D11	D9	D11	D9	D11	D9	D11
1	3	5	2	5	-	-	3	4	5	1
2	2	5	1	5	1	5	3	4	5	1
3	4	-	2	-	-	-	3	-	6	-
4	4	-	3	-	-	-	3	-	5	-
5	1	-	2	-	-	-	4	-	5	-
6	2	-	2	-	-	-	4	-	6	-
7	3	-	1	-	7	-	3	-	5	-
9	4	3	8	3	9	2	4	3	10	1
11	3	-	2	-	-	-	3	-	5	-
14	1	-	2	-	8	-	3	-	5	-
15	3	-	3	-	-	-	4	-	5	-
16	3	-	3	-	-	-	4	-	5	-
20	6	5	5	5	-	-	6	3	8	-
21	5	-	10	-	-	-	3	-	-	-
22	10	-	5	-	-	-	-	-	5	-
26	6	-	5	-	-	-	-	-	-	-
30	3	5	2	5	-	-	3	4	5	1
54	-	5	-	5	-	-	-	4	-	1

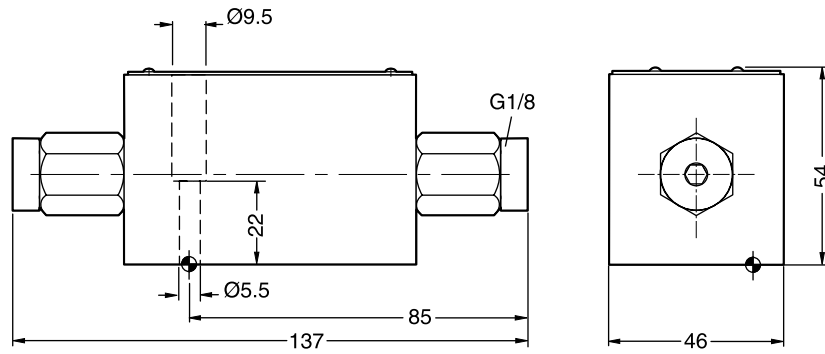



D1VP








2

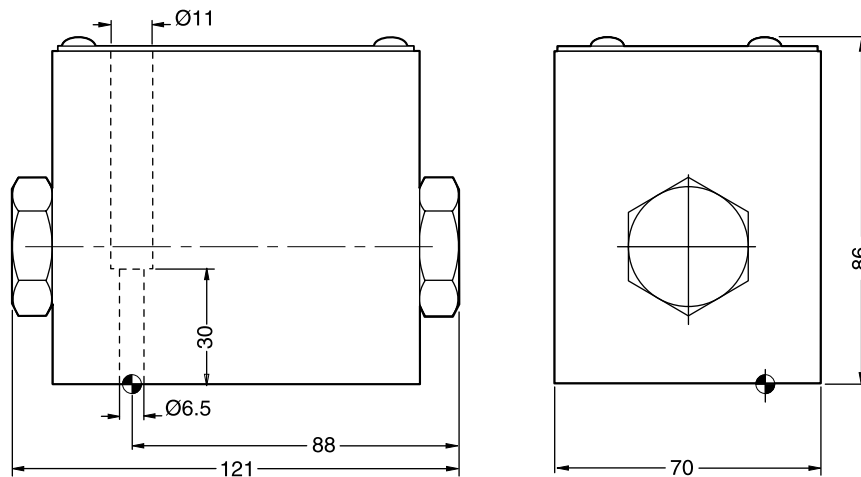Surface finish	 Kit	 Kit	 Kit	 Kit
	BK375	4x M5x30 DIN 912 12.9	7.6 Nm ±15%	NBR: SK-D1VP-70 FPM: SK-D1VP-V70



D3DP



Surface finish	 Kit	 Kit	 Kit	 Kit
	BK385	4x M6x40 DIN 912 12.9	13.2 Nm ±15%	NBR: SK-D3DP-35 FPM: SK-D3DP-V35



2

D4P

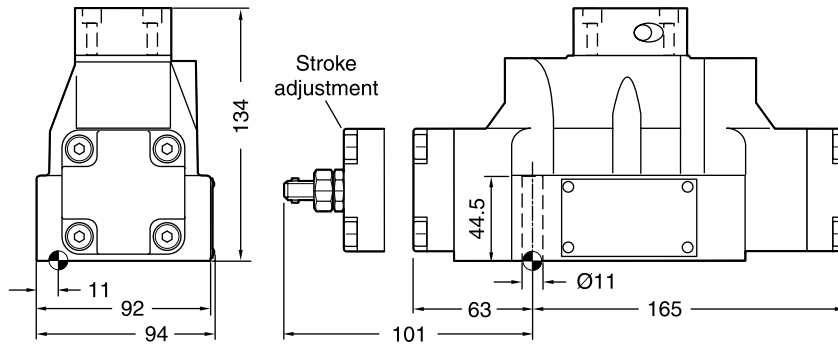


Surface finish	Kit	Kit	Kit	Kit
	BK320	4x M10x60 2 x M6x55 DIN 912 12.9	63 Nm ±15% 13.2 Nm ±15%	NBR: SK-D41VW-70 FPM: SK-D41VW-V70

D9P

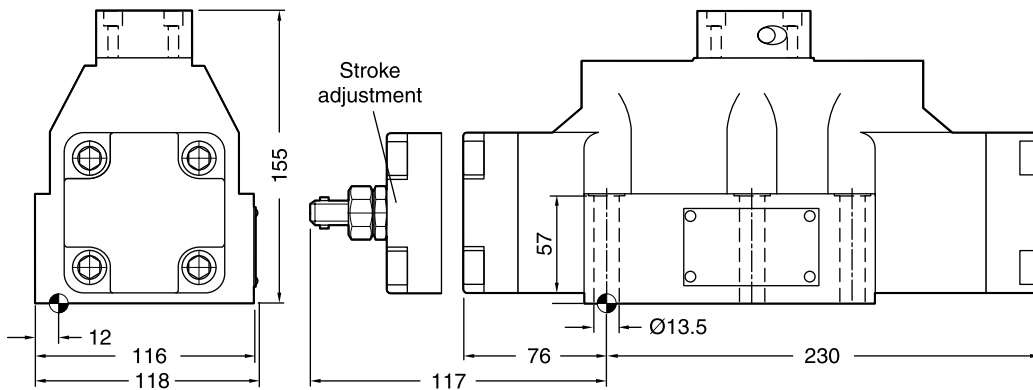






Surface finish	Kit	Kit	Kit	Kit
	BK360	6x M12x75 DIN 912 12.9	108 Nm ±15%	NBR: SK-D91VW-70 FPM: SK-D91VW-V70

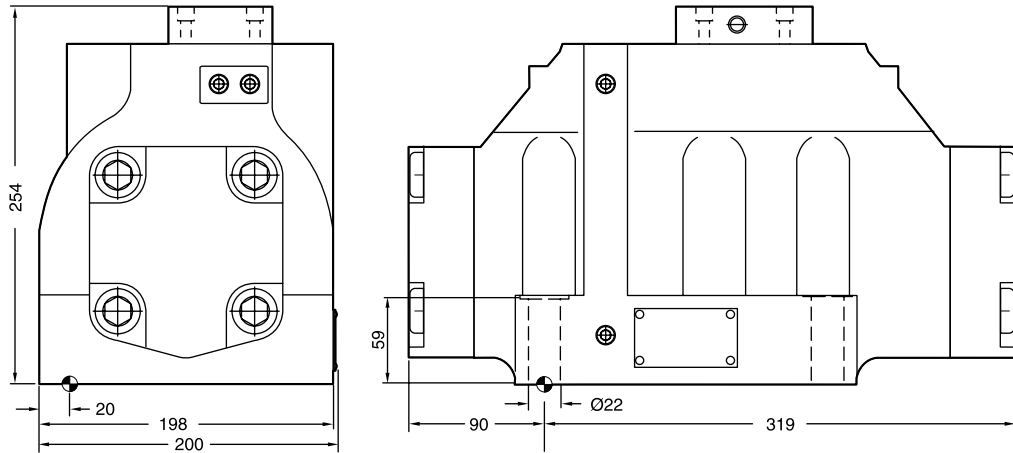D11P



2



Surface finish	 Kit	 Kit	 Kit	 Kit
	BK386	6x M20x90 DIN 912 12.9	517 Nm ±15%	NBR: SK-D111VW-70 FPM: SK-D111VW-V70

Characteristics

**Directional Control Valves
Series D1DL, D3DL, D4L, D9L**

The D1DL, D3DL, D4L and D9L are 5 chamber 4/3 or 4/2 way directional control valves. They are operated by a hand lever which is directly connected to the spool.

The hand lever can be located either on the A or B side. Spring offset and detent designs are available.

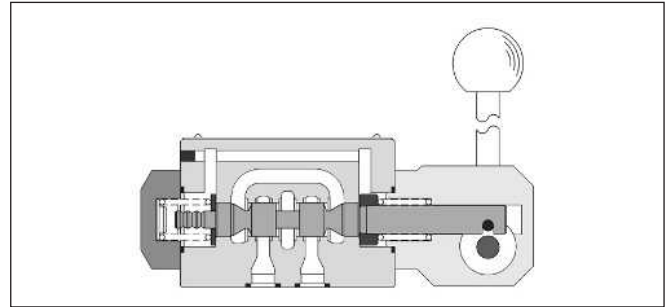


2

Technical data

General		Directional spool valve			
Design		Lever			
Actuation					
Series		D1DL	D3DL	D4L	D9L
Size		NG06	NG10	NG16	NG25
Weight		[kg] 1.4	3.7	9.0	17.0
Mounting interface		DIN 24340 A06 ISO 4401 NFPA D03	DIN 24340 A10 ISO 4401 NFPA D05	DIN 24340 A16 ISO 4401 NFPA D07	DIN 24340 A25 ISO 4401 NFPA D08
		CETOP RP 121-H			
Mounting position		unrestricted, preferably horizontal			
Ambient temperature		[°C] -25...+50			
Hydraulic					
Max. operating pressure		[bar] P, A B: 350; T: 10	P, A B: 350; T: 10	external drain P, A B, T: 350; X, Y: 10 internal drain P, A B: 350; T, X, Y: 10	external drain P, A B, T: 350; X, Y: 10 internal drain P, A B: 350; T, X, Y: 10
Fluid		Hydraulic oil in accordance with DIN 51524 / 51525			
Fluid temperature		[°C] -25 ... +70			
Viscosity permitted		[cSt] / [mm²/s] 2.8...400			
Viscosity recommended		[cSt] / [mm²/s] 30...80			
Filtration		ISO 4406 (1999); 18/16/13 (meet NAS 1638: 7)			
Flow max.		[l/min] 80	130	300	700
Leakage at 350 bar (per flow path)		[ml/min] up to 60*	up to 100*	up to 200*	up to 800*
		* depending on spool			

2

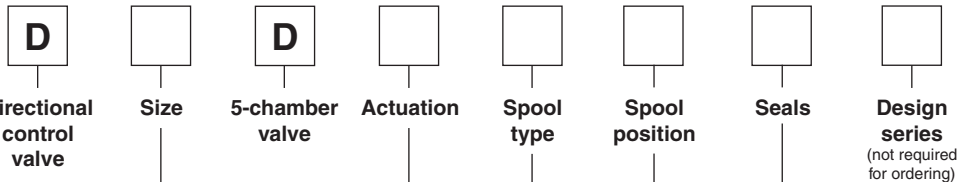

Code	Size
1	DIN NG06, CETOP03 NFFA D03
3	DIN NG10, CETOP05 NFFA D05

Code	Seals
N	NBR
V	FPM

Code	Actuation
L	Hand lever side B
LB	Hand lever side A

3 position spools	
Code	Spool type
1	
2	
4	
6 ¹⁾	
9 ³⁾	
10 ¹⁾	
42 ²⁾	

2 position spools	
Code	Spool type
20	

¹⁾ Only available for D3DL
²⁾ Only available for D1DL
³⁾ Consider specific spool position.


3 position spools		
Code	all 3 position spools	
C		3 positions. Spring offset in position "0". Operated in position "a" or "b".
	Standard	Spool type 9
E		2 positions. Spring offset in position "0".
K		2 positions. Spring offset in position "0".
N		3 positions, detent. Operated in position "a", "0" or "b".
R		2 positions, detent. Operated in position "0" or "b".
S		2 positions, detent. Operated in position "0" or "a". No centre in offset position.

2 position spools		
Code	Spool position	
B ⁴⁾		Spring offset in position "b". Operated in position "a".
D		Detent, operated in position "a" or "b". No centre or offset position.
H ⁵⁾		Spring offset in position "a". Operated in position "b".

⁴⁾ For D1D only operation LB available
 For D3D operation L and LB available
⁵⁾ For D1D only operation L available
 For D3D operation L and LB available

Bold letters =
Short-term availability

Further spool types on request.

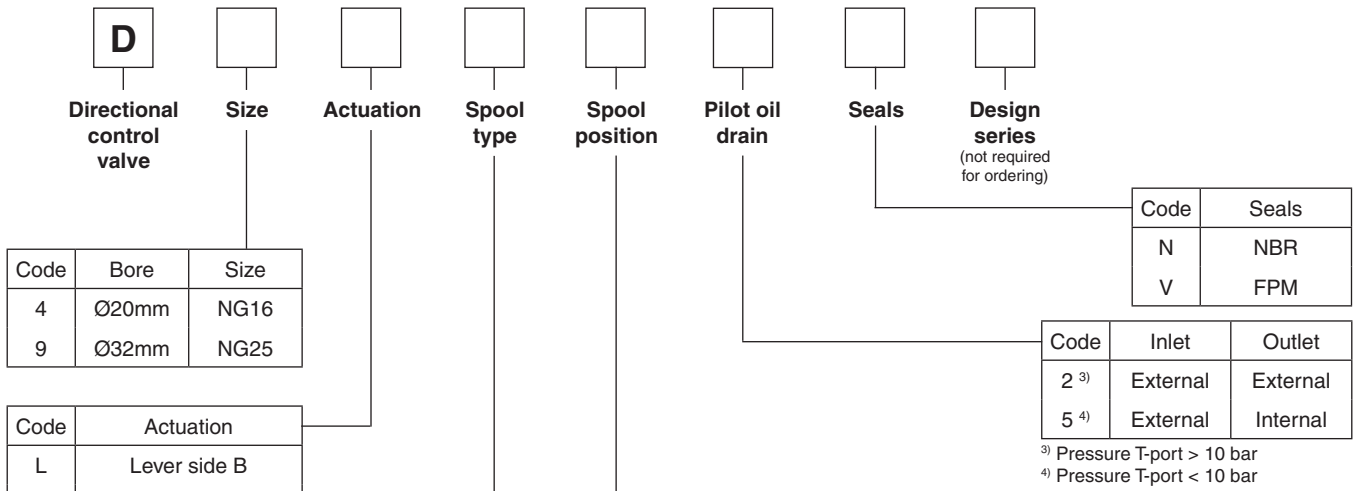

3 position spools	
Code	Spool type
	a 0 b
1	
2	
3	
4	
6 ¹⁾	
7	
9 ²⁾	
11	
14	
15	

2 position spools	
Code	Spool type
	a b
20	
30	

¹⁾ Only available for D4L
²⁾ Consider specific spool position.

3 position spools		
Code	all 3 position spools	
C		3 positions. Spring offset in position "0". Operated in position "a" or "b".
	Standard	Spool type 9
E		2 positions. Spring offset in position "0".
F		2 positions. Spring offset in position "b".
K		2 positions. Spring offset in position "0".
M		2 positions. Spring offset in position "a".
N		3 positions, detent. Operated in position "a", "0" or "b".
R		2 positions, detent. Operated in position "0" or "b".
S		2 positions, detent. Operated in position "0" or "a". No centre in offset position.

2 position spools		
Code	Spool position	
B		Spring offset in position "b". Operated in position "a".
D		Detent, operated in position "a" or "b". No centre or offset position.
H		Spring offset in position "a". Operated in position "b".


Further spool types on request.

The flow curve diagram shows the flow versus pressure drop curves for all spool types. The relevant curve number for each spool type, operating position and flow direction is given in the table below.

D1DL

Spool	Position „b“		Position „a“		Position „0“					
	P->A	B->T	P->B	A->T	P->A	P->B	A->T	B->T	P->T	A->B
1	4	1	4	1	-	-	-	-	-	-
2	5	2	5	2	4	4	1	1	6	1
4	4	2	4	2	-	-	7	7	-	9
20	5	1	5	1	-	-	-	-	-	-
	P->B	A->T	P->A	B->T	P->A	P->B	A->T	B->T	P->T	A->B
9	3	3	3	3	-	-	-	-	9	-


Flow curve diagram D1DL

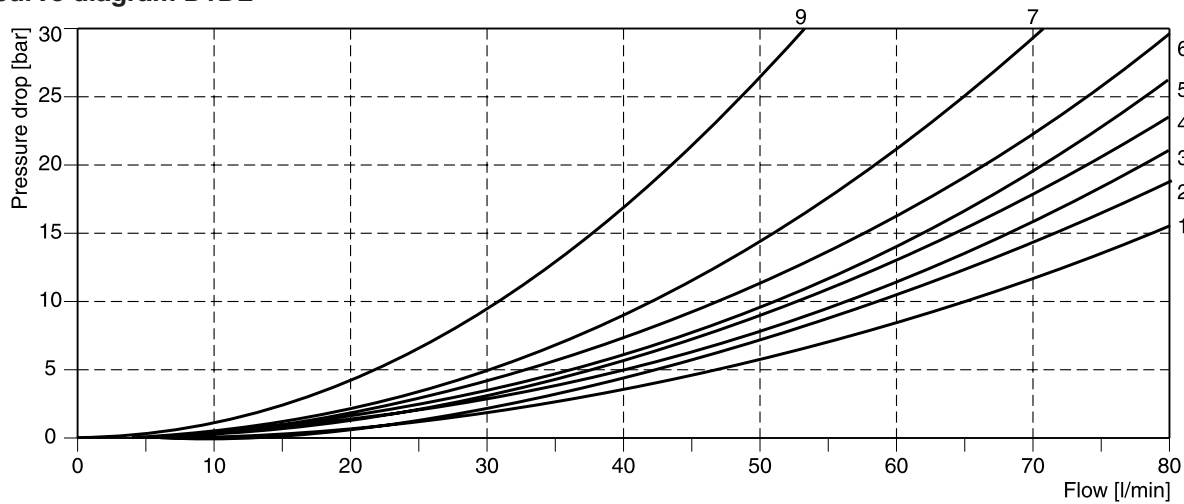

D3DL

Spool	Position „b“		Position „a“		Position „0“					
	P->A	B->T	P->B	A->T	P->A	P->B	A->T	B->T	P->T	A->B
1	4	3	4	3	-	-	-	-	-	-
2	4	1	4	1	3	3	1	1	5	1
4	4	2	4	2	-	-	3	3	-	5
6	4	3	4	3	6	6	-	-	-	6
10	4	-	4	-	-	-	-	-	-	-
20	4	3	4	3	-	-	-	-	-	-
	P->B	A->T	P->A	B->T	P->A	P->B	A->T	B->T	P->T	A->B
9	4	4	4	4	-	-	-	-	6	-

Flow curve diagram D3DL

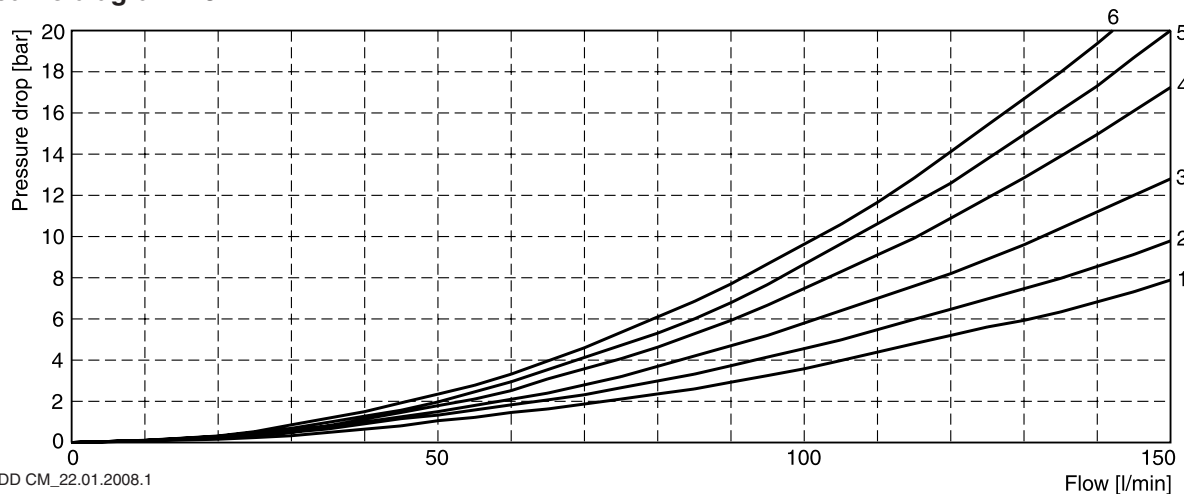


DL_UK.INDD CM_22.01.2008.1

The flow curve diagram shows the flow versus pressure drop curves for all spool types. The relevant curve number

for each spool type, operating position and flow direction is given in the table below.


D4L

Spool Code	Curve number				
	P-A	P-B	P-T	A-T	B-T
1	1	1	-	4	5
2	1	2	6	4	6
3	1	2	-	5	6
4	1	1	-	5	5
6	1	2	-	3	6
7	1	1	6	4	5
9	2	9	8	7	10
11	1	1	-	4	5
14	1	1	6	5	4
15	2	1	-	6	5
20	3	5	-	3	5
30	2	3	-	6	7

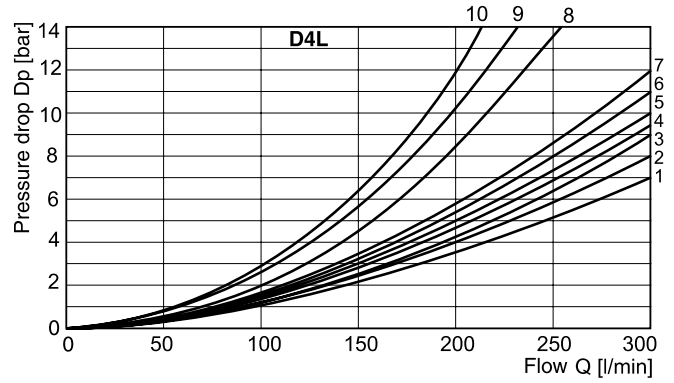


D9L



Spool Code	Curve number				
	P-A	P-B	P-T	A-T	B-T
1	3	2	-	3	5
2	2	1	1	3	5
3	4	2	-	3	6
4	4	3	-	3	5
7	3	1	7	3	5
9	4	8	9	4	10
14	1	3	7	5	3
15	2	4	-	5	3
20	6	5	-	6	8
30	3	2	-	3	5

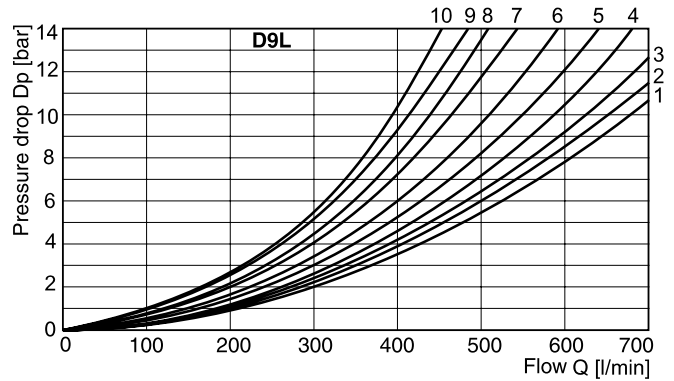



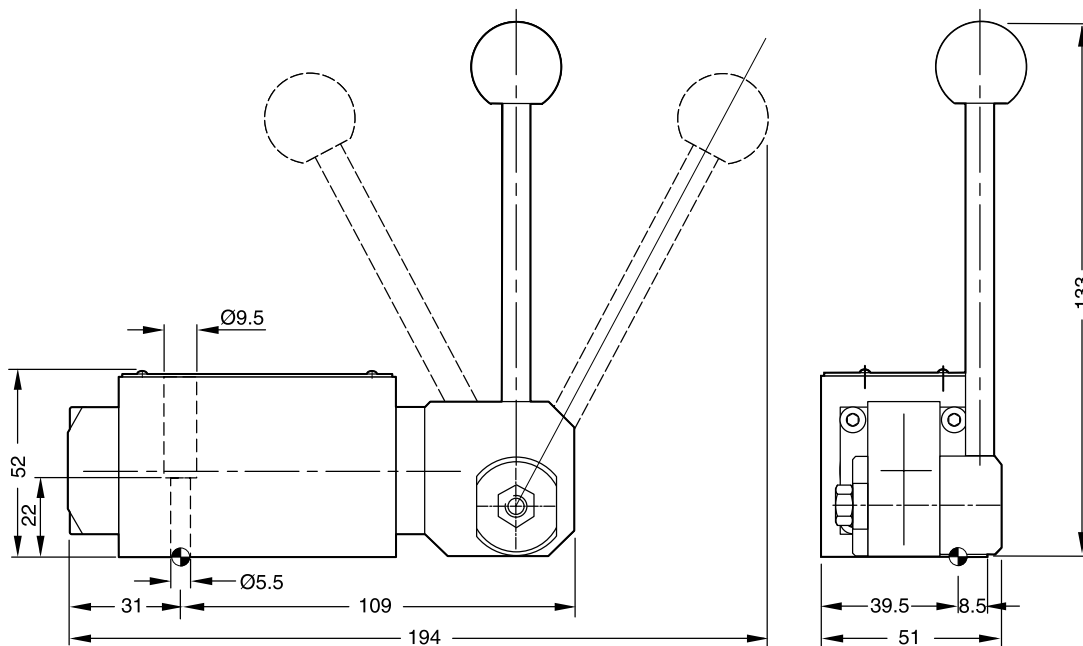


D1DL

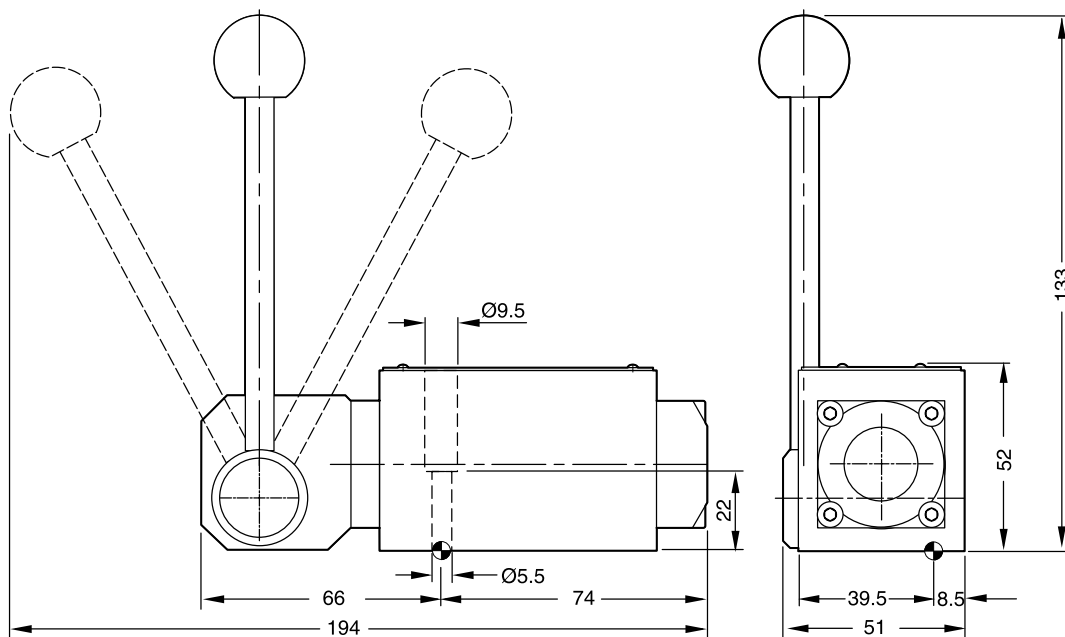


D1DLB




Surface finish	 Kit	 Kit	 Kit	 Kit
	BK375	4x M5x30 DIN 912 12.9	7.6 Nm ±15%	NBR: SK-D1DL-77 FPM: SK-D1DL-V77



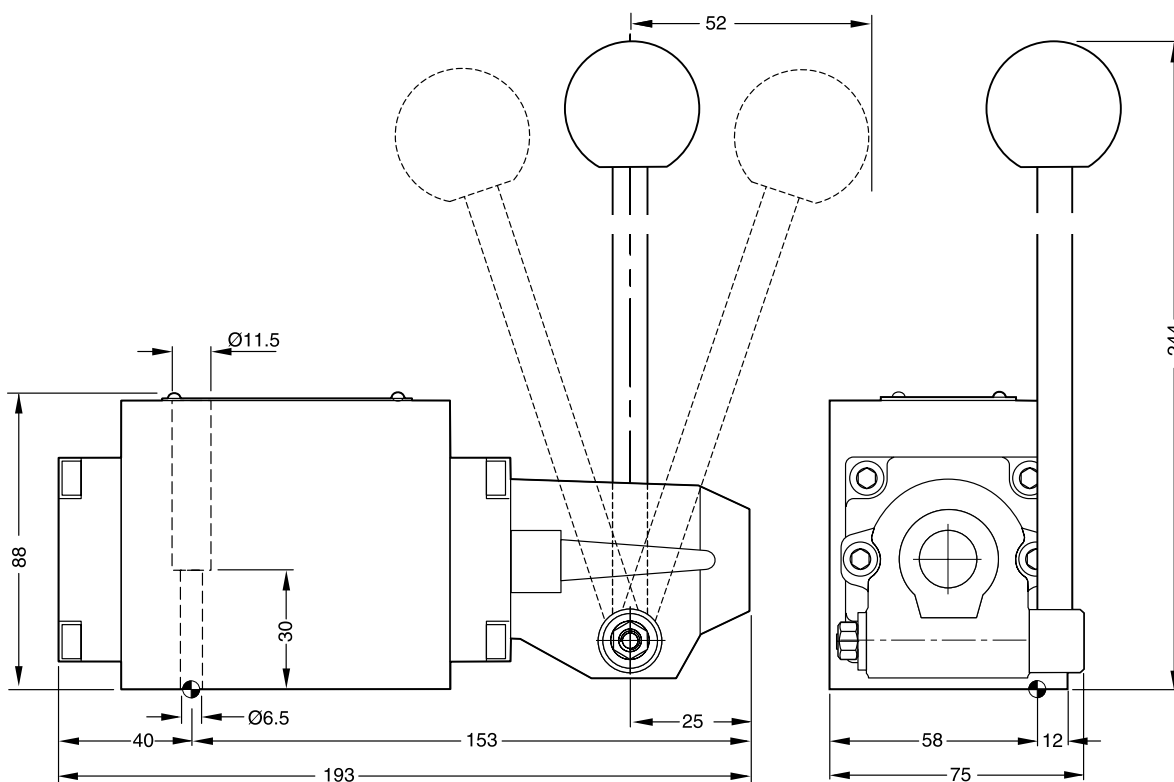


DL_UK.INDD CM_22.01.2008.1

D3DL

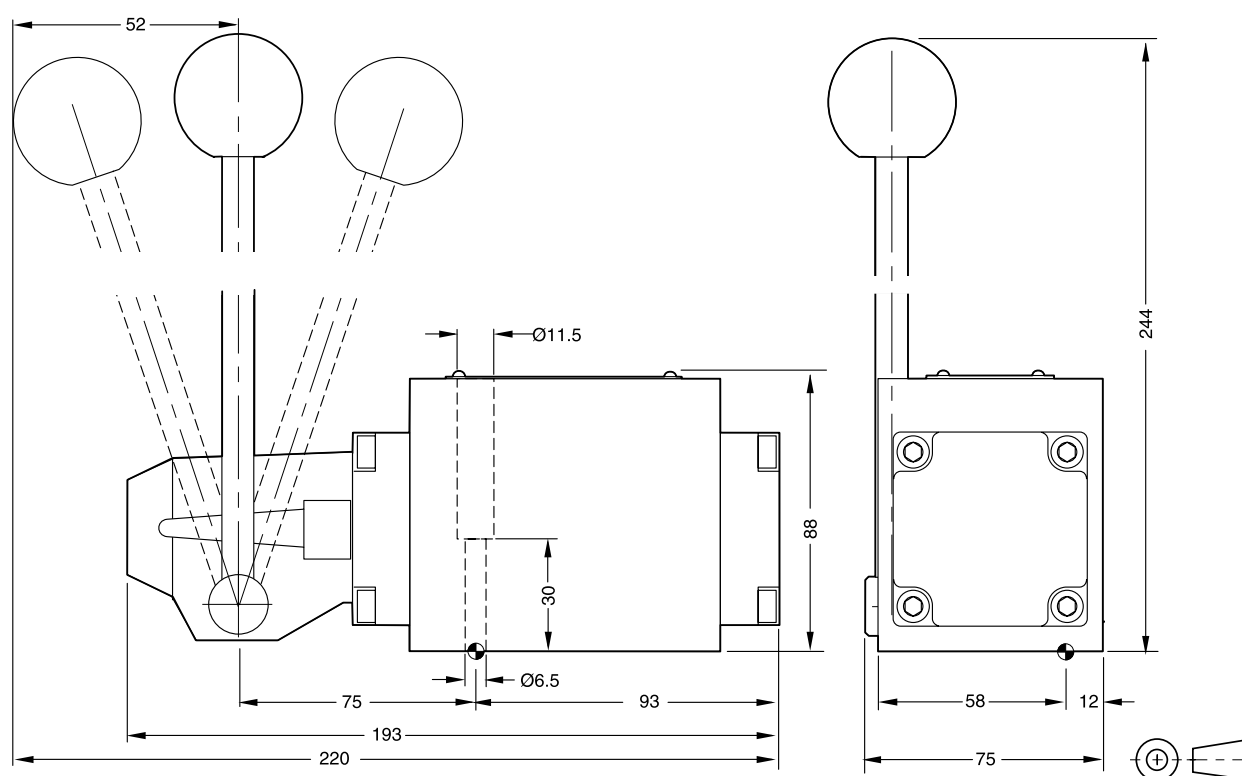


D3DLB





Surface finish	 Kit			 Kit
	BK385	4x M6x40 DIN 912 12.9	13.2 Nm ±15%	NBR: SK-D3DL-35 FPM: SK-D3DL-V35



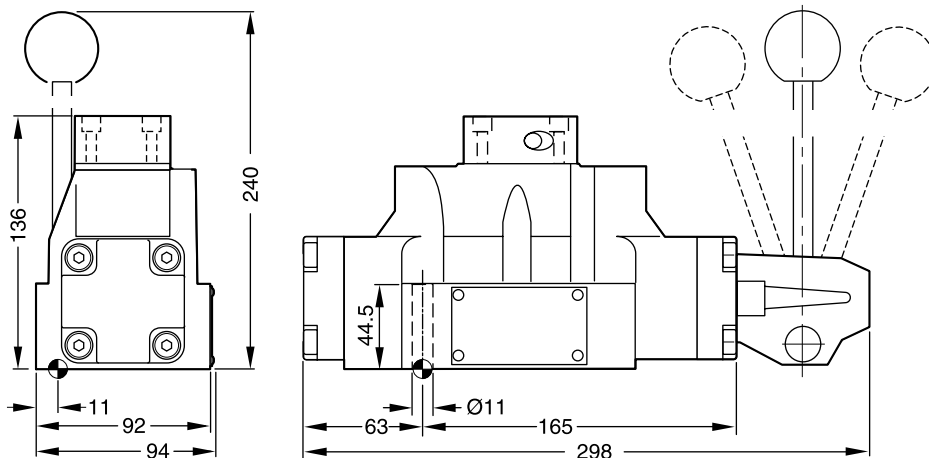


DL_UK.INDD CM_22.01.2008.1

D4L

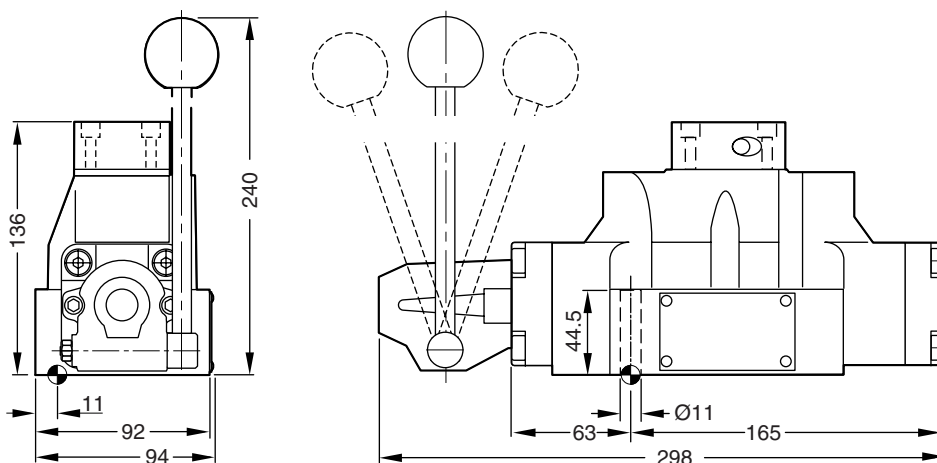


D4LB




Surface finish	 Kit	 Kit	 Kit	 Kit
	BK320	4x M10x60 2x M6x55 DIN 912 12.9	63 Nm 13.2 Nm ±15%	NBR: SK-D4L-60 FPM: SK-D4L-V60





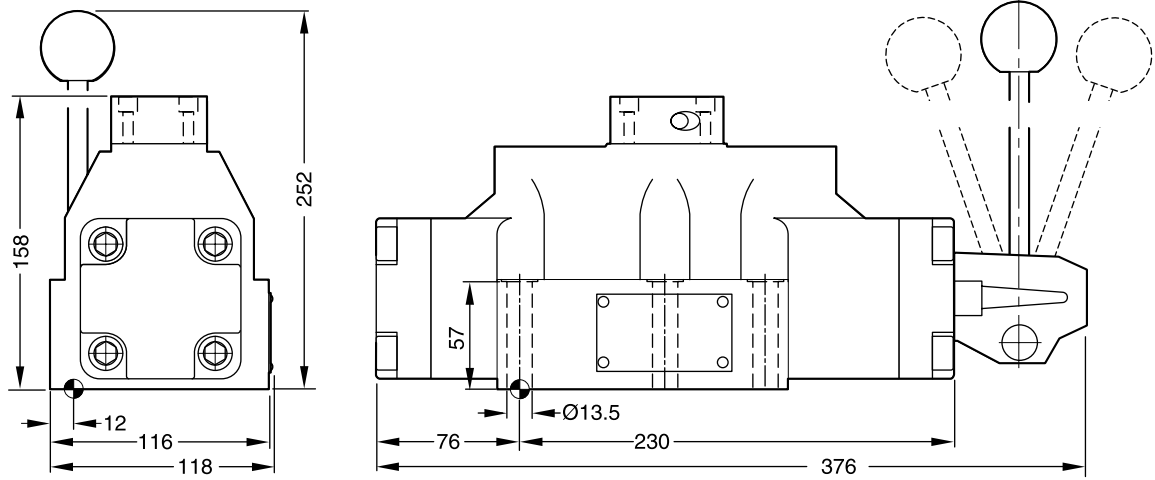
D9L



2

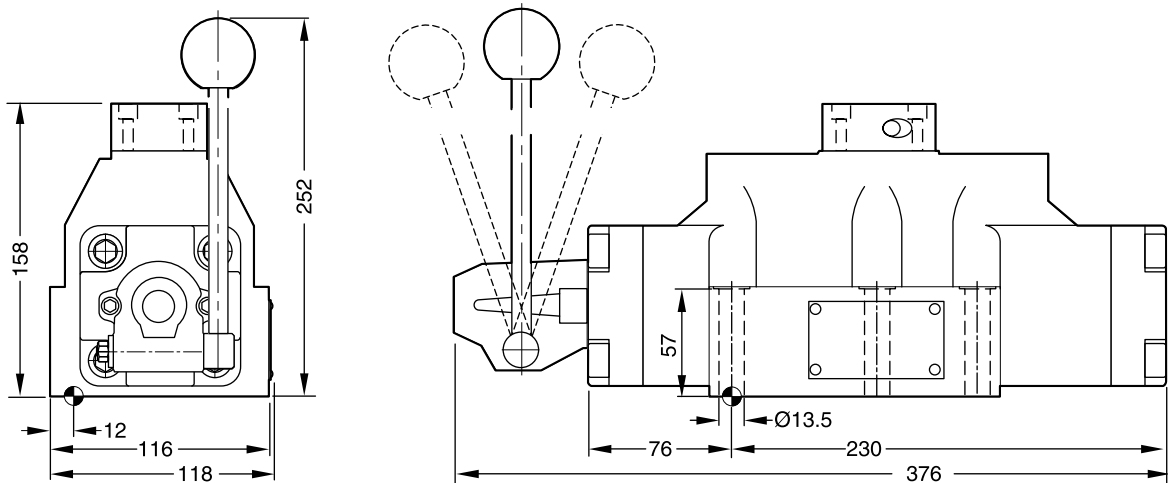
D9LB




Surface finish	 Kit	 Kit	 Kit	 Kit
	BK360	6x M12x75 DIN 912 12.9	108 Nm ±15%	NBR: SK-D9L-70 FPM: SK-D9L-V70

Description	Cable connection	Figure circuit	Order No.	
			black (B)	grey (A)
Plug EN 175301-803 *, style AF Protection class IP 65 for voltages up to 250V	PG 9 PG 11	Fig. 1	5001710 5001716	5001711 5001717
Plug with LED 24V DC Plug with lamp insert 120V AC Plug with lamp insert 230V AC	PG 11	Fig. 1 and 3	5001571	5001572
		Fig. 1 and 4	5001573 5001575	5001574 5001576
Plug with LED 24 V DC and suppressing circuit Plug with rectifier: Bridge-type rectifier with silicon diodes. Varistors are used to protect the diodes against power surges from the power supply up to 250V AC. Plug with cable strain relief and transparent cover	PG 11	Fig. 1 and 5	5001708	5001709
		Fig. 1 and 6	5001737	5001738
		Fig. 2	5001723	5001724
Inserts for plug 5001723 and 5001724		Circuit	Order No.	
Bridge-type rectifier up to 250V AC 7		7	5001727	
Bridge-type rectifier with lamp 250V AC		8	5001734	

* (New) EN 175301-803 corresponds to (old) DIN 43650.

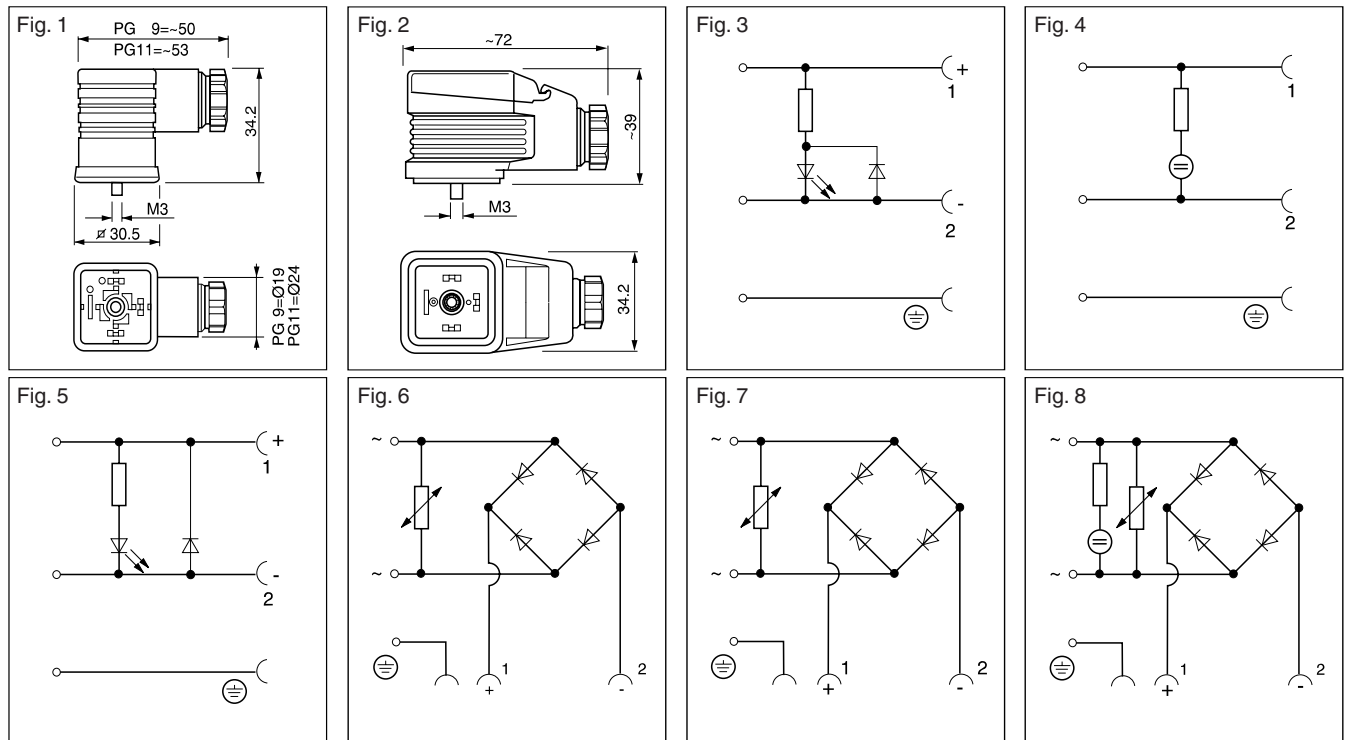

Plug M12x1, Order No.: 5004109

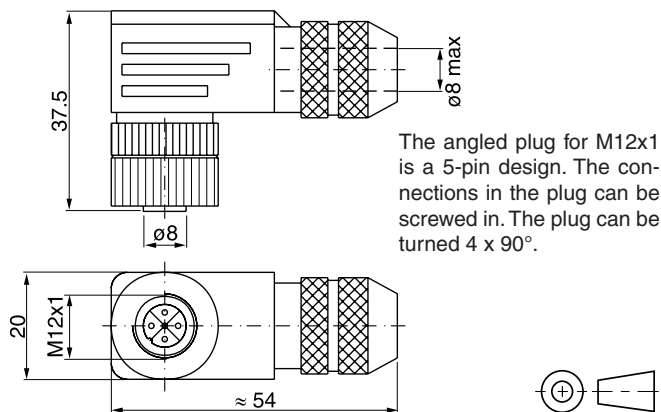

Plug kit 2-pin Junior Timer (AMP)

Order no.	Number of plugs in 1 kit
393 000 K822	1
393 000 K825	10
393 000 K826	50
393 000 K827	100





Solenoid kit (displayed: EN plug)

A solenoid kit contains tube, coil, retainer and seals for the solenoid.

Coil kit

A coil kit contains coil, retainer and seals for the coil.

2



For D1VW standard

Solenoid kits: AK-D1VW-S-... (Soft shift on request)		(Example: AK-D1VW-S-JW-91)	
Voltage Volt/Hertz	Voltage Code	EN plug D1VW	EN plug without manual override (Code „T“) D1VW
12V=	K	KW-91	KWT-91
24V=	J	JW-91	JWT-91
98V=	U	UW-91	UWT-91
205V=	G	GW-91	GWT-91
110V/50Hz / 120V/60Hz	Y	YW-91	-
230V/50Hz / 240V/60Hz	T	TW-91	-

Coil kits: AK-D1VW-C-... (Example: AK-D1VW-C-JW-91)		EN plug D1VW
Voltage Volt/Hertz	Voltage Code	
12V=	K	KW-91
24V=	J	JW-91
98V=	U	UW-91
205V=	G	GW-91
110V/50Hz / 120V/60Hz	Y	YW-91
230V/50Hz / 240V/60Hz	T	TW-91

D1VW 8 Watt

Solenoid kits: AK-D1VW-S-...			Coil kits: AK-D1VW-C-...		
Voltage Volt/Hertz	Voltage Code	EN plug D1VW	M12x1 „DESINA“ (Code „DLJ5“) D1VW	EN plug D1VW	M12x1 „DESINA“ (Code „DLJ5“) D1VW
24V=	J	JWL-91	JDLJ5-91	JWL-91	JDLJ5-91

D3W

Solenoid kits: AK-D3W-S-... (Soft shift on request) (Example: AK-D3W-S-JW-30)					Coil kits: AK-D3W-C-...	
Voltage Volt/Hertz	Voltage Code	EN plug D3W	EN plug without manual override (Code „T“) D3W	EN plug with 210bar tank pressure (Code „H“) D3W	EN plug D3W	EN plug without manual override (Code „T“) D3W
12V=	K	KW-30	KWT-30	KW-30	KW-30	KWT-30
24V=	J	JW-30	JWT-30	JW-30	JW-30	JWT-30
98V=	U	UW-30	UWT-30	UW-30	UW-30	UWT-30
205V=	G	GW-30	GWT-30	GW-30	GW-30	GWT-30
110V/50Hz / 120V/60Hz	Y	YW-30	-	YWH-30	YW-30	-
230V/50Hz / 240V/60Hz	T	TW-30	-	TWH-30	TW-30	-

Other solenoids, coil kits and tube kits on request.

Bold letters = Short-term availability

O-rings to seal between valve and mounting surface

Valve size	Valve series	Ports	Dimensions inner Ø x section Ø	Quantity ¹⁾
DIN NG 6	D1	P, A, B, T X, Y	9.25 x 1.78	4
			4.47 x 1.78	2
DIN NG10	D3	P, A, B, T X, Y	12.42 x 1.78	5
			10.82 x 1.78	2
DIN NG 16	D4	P, A, B, T X, Y	21.89 x 2.62	4
			10.82 x 1.78	2
DIN NG 25	D8	P, A, B, T X, Y	29.82 x 2.62	4
			20.29 x 2.62	2
DIN NG 25	D9	P, A, B, T X, Y	34.59 x 2.62	4
			20.29 x 2.62	2
DIN NG 32	D11	P, A, B, T X, Y	53.57 x 3.53	4
			14.00 x 1.78	2

¹⁾ Number per set

**Seal kits (connecting surface and inner seals)
 Spool valves**

Valve series	Material	Order code for valve size						
		D1	D3	D31DW	D4	D8	D9	D11
D**W Solenoid	NBR	SK-D1VW-N-91	SK-D3W-30	SK-D31DW-N-91	SK-D41VW-N-91	SK-D81VW-N-91	SK-D91VW-N-91	SK-D111VW-N-91
	FPM	SK-D1VW-V-91	SK-D3W-V30	SK-D31DW-V-91	SK-D41VW-V-91	SK-D81VW-V-91	SK-D91VW-V-91	SK-D111VW-V-91
D**P Hydr.	NBR	SK-D1VP-70	SK-D3DP-35	–	SK-D41VW-70	–	SK-D91VW-70	SK-D111VW-70
	FPM	SK-D1VP-V70	SK-D3DP-V35	–	SK-D41VW-V70	–	SK-D91VW-V70	SK-D111VW-V70
D*L/LB Hand lever	NBR	SK-D1DL-77	SK-D3DL-35	–	SK-D4L-60	–	SK-D9L-60	–
	FPM	SK-D1DL-V77	SK-D3DL-V35	–	SK-D4L-V60	–	SK-D9L-V60	–


Valve series	Material	4D01-C	4D02-C	4D02V-B	4D03-C	4D06-C
4D0* Solenoid	NBR	SK-D1VW-N-91	SK-D3W-30	SK-4D02V-B1	SK-D41VW-N-91	SK-D81VW-N-91
	FPM	SK-D1VW-V-91	SK-D3W-V30	SK-4D02V-B5	SK-D41VW-V-91	SK-D81VW-V-91

Seated valve

Valve series	Material	D1SE
D1SE Solenoid	NBR	SK-D1SE-70
	FPM	SK-D1SE-V70

Slip-in orifice for P, A, B port of directional control valves NG6 and NG10

2

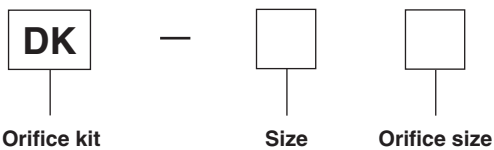


Code	Size
D1VW91	NG6
D3W30	NG10

Code	Orifice Ø	NG6	NG10
00	without orifice	x	x
06	0.6 mm	x	
08	0.8 mm	x	x
09	0.9 mm	x	
10	1.0 mm	x	x
11	1.1 mm	x	
12	1.2 mm	x	x
14	1.4 mm	x	x
15	1.5 mm	x	x
17	1.7 mm		x
18	1.8 mm	x	
20	2.0 mm	x	x
25	2.5 mm	x	x
30	3.0 mm		x
45	4.5 mm		x


Package size: Each kit contains 10 orifice of the same size.

Dimensions

NG6

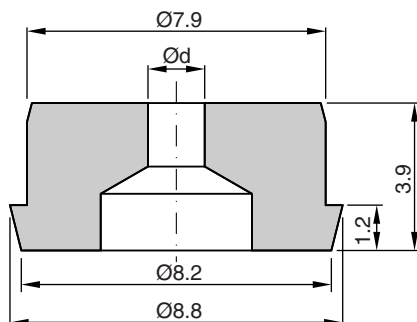


NG10

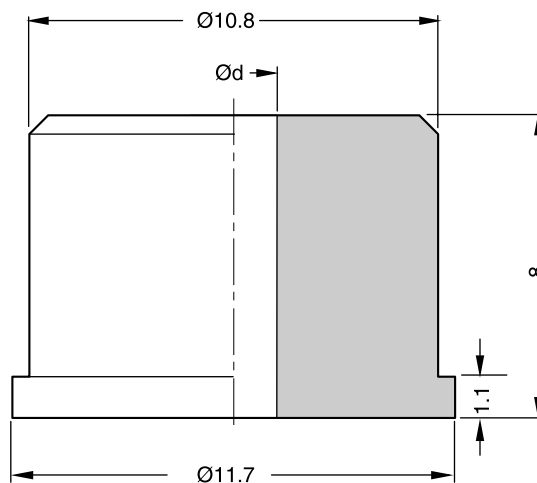


Size 6, mounting pattern to DIN 24340-A6

Size 10, mounting pattern to DIN 24340-A10

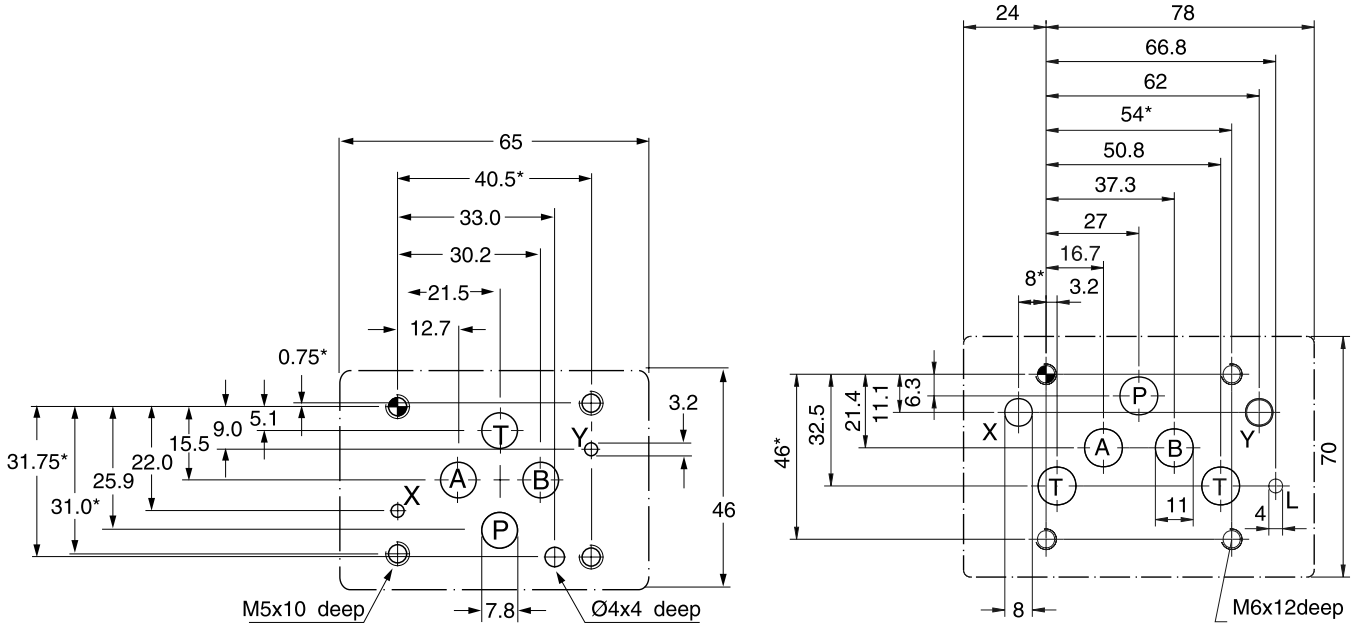

2

Size 16, mounting pattern to DIN 24340-A16

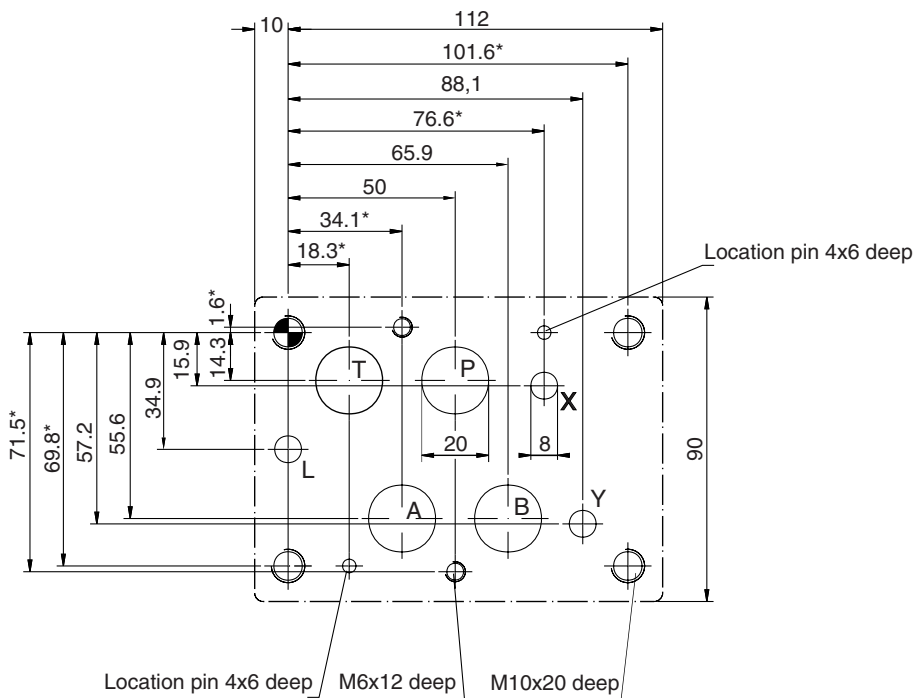


With * marked dimensions ± 0.1mm. All other dimensions ± 0.2mm.


Subplates and manifolds see chapter 12.

2

Size 25, mounting pattern to DIN 24340-A25

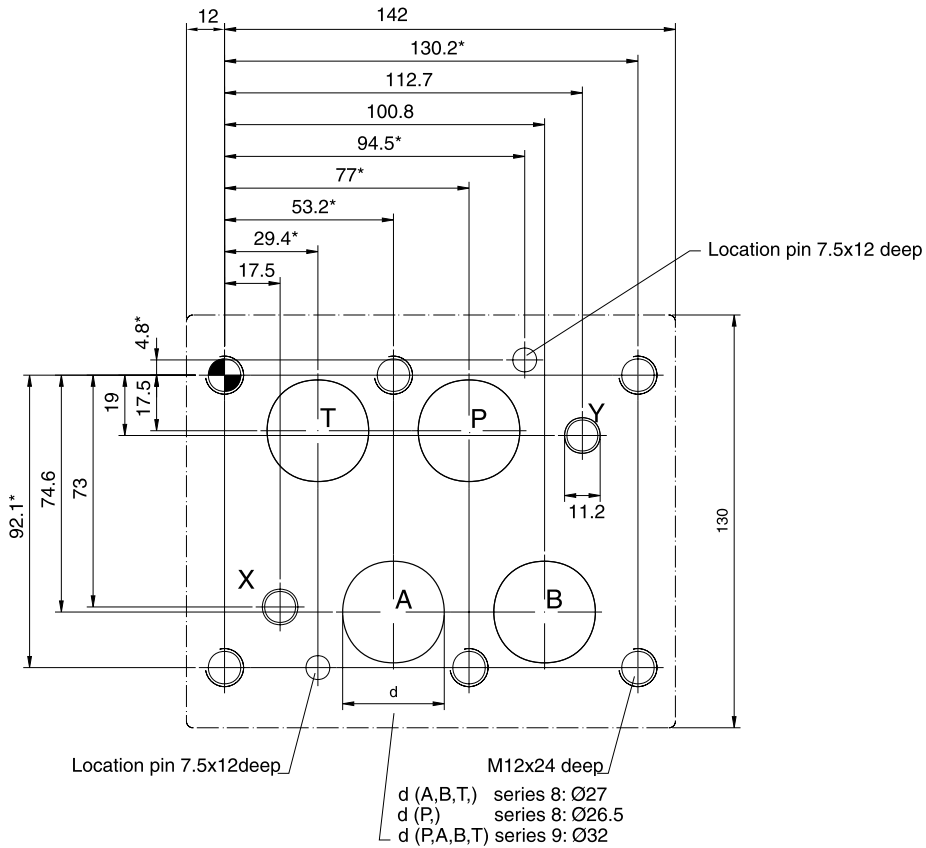

Size 32, mounting pattern to DIN 24340-A32

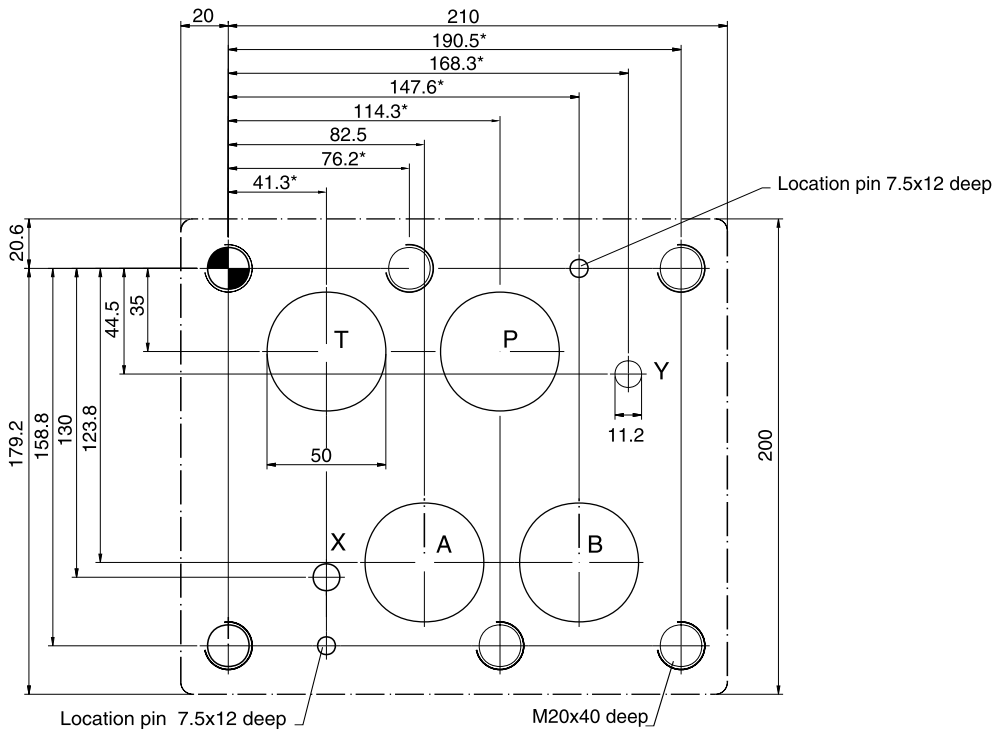

With * marked dimensions ± 0.1mm. All other dimensions ± 0.2mm.

Subplates and manifolds see chapter 12.

access02_UK.INDD CM_22.01.2008.1